

Molex.com

English
日本語
한국어
简体中文

Register | Login
My Parts (0 items)

Product Name

Cross-Ref

Catalog

Literature

Industries

Standards

Contact Us

About Us

Investors

Careers

Search site:Search: [Go](#)

Connectors

Sockets

I/O Connectors

Cable Assemblies

Fiber Optics

Printed Circuit Products

Industrial Products

Lighting Products

Switch Language

English

[Home](#)
[RF/Coax Connectors](#)
[Datasheet](#)

Need Assistance?

Contact Us
Find a Distributor
Order Samples
Tech Library
Ecocare
Electrical Models

Printer-friendly page


Email this page

Part Number:
0731315013

Status:
Active

Description:
BNC 50 Ohm, Vertical PCB Bulkhead Jack Receptacle, Panel Isolated, White PBT Housing

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*
[Drawing \(PDF\)](#)
[Product Specification PS-73598-0050 \(PDF\)](#)
[3D Model](#)

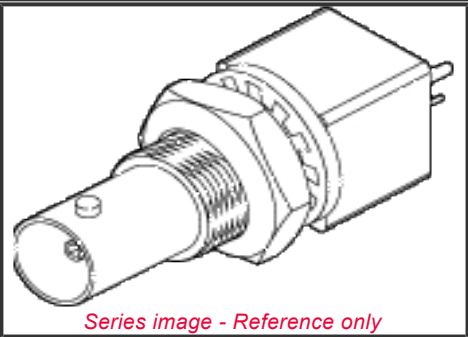

EU RoHS
RoHS Compliant RF Product

REACH SVHC
Not Reviewed

Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[73131](#)Series

[Data](#)[Sheet](#)

Order Products:

Part Detail: [\(show all\)](#)

[General](#)[Physical](#)[Electrical](#)[Solder Process](#) **Data**[Material Info](#)[Reference - Drawing Numbers](#)

General

Product Family	RF/Coax Connectors
Series	73131
More Detailed Tech Information	rf@molex.com
Product Name	BNC
Style	PCB
Wire/Cable Type	N/A

Physical

Cable Attachment	N/A
Gender	Female
Keying to Mating Part	N/A
Orientation	Straight
PCB Mounting	Through Hole
PCB Thickness Recommended (in)	0.125 In
PCB Thickness Recommended (mm)	3.20 mm
Packaging Type	Tray
Panel Mount	Yes
Panel Mount Method	Bulkhead
Reverse Polar	No

Electrical(Please review the Product Specification for specific details.)

Impedance	50 ohms
-----------	---------

Solder Process Data

Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	245

Material Info

Reference - Drawing Numbers

Product Specification	PS-73598-0050
Sales Drawing	SD-73131-5013