

Type 5ST / 5STP

Time - lag Fuse Series (Low Breaking Capacity)

HF Pb 5ST/5STP Series, 5x20mm Glass Tube Time - lag Fuse

RoHS 6 Compliant

Description

5x20mm Time lag, low breaking capacity, glass tube body cartridge fuse designed, approved and complied with IEC 60127-2, standard sheet 3.

Features

- Meet IEC standard 60127-2, sheet 3
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- RoHS 6 compliant
- Halogen Free
- Leadfree

Applications


Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE = Pb
HALOGEN FREE = HF

Physical Specifications

Materials	Body : Glass
	Cap : Nickel Plated Brass Caps
	Leads : Matte Tin Plated Copper
Marking	On Fuse :
	"bel", "T", "Current Rating", "L", "250V",
	"Appropriate Safety Logos", "✓" (RoHS 6 compliant)
	On Label :
	"bel", "5ST" or "5STP", "Current Rating", "Voltage Rating", "Interrupting Rating", " Appropriate Safety Logos" and "M", "C" (China RoHS compliant).

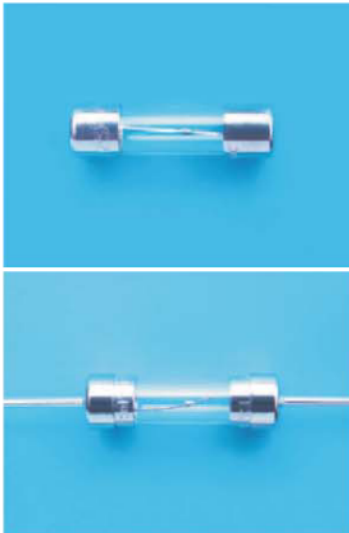

Electrical Characteristics (IEC-127-2 STANDARD SHEET 3)

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
63mA to 100mA	1	2	200	10	40	3	10	300		
125mA to 12.5A	1	2	600	10	150	3	20	300		
	hr.	min.	ms	sec	ms	sec	ms	ms		

In clause 9.2, the test voltage for 5STP ratings from 63mA to 6.3A is 63VDC.

Safety Agency Approvals

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE NUMBER	VOLTAGE RATING (V)	AMPERE RANGE / VOLT @ I.R. ABILITY*
S	1513392	63mA - 10A / 250V AC	63mA - 6.3A / 250V AC @ 35A or 10 In whichever is greater
UL	40000507		
UL	E20624		63mA - 10A / 250V AC @ 35A or 10 In whichever is greater
UL	LR39772		
CCC	2003010207030316		63mA - 6.3A / 250V AC @ 35A or 10 In whichever is greater

* I.R. = INTERRUPTING RATING = SHORT CIRCUIT RATING (AMPS)

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

Type 5ST / 5STP

Time - lag Fuse Series (Low Breaking Capacity)

HF Pb 5ST/5STP Series, 5x20mm Glass Tube Time - lag Fuse

RoHS 6 Compliant

Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform)
Vibration Resistance	MIL-STD-202G, Method 201A(10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test Condition B(48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition B (After Opening) 100, 000 ohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G, Method 210F, Test Condition B.(260+/-5 °C,10+/-1 sec)
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65 °C to +125 °C).
Operating Temperature	-55 °C to +125 °C
Terminal Strength	IEC-68-2-21

Electrical Specifications

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Volt) max.	Voltage and Interrupting Ratings	Melting I ² T <10 mSec (A ² Sec)	Melting I ² T @10 In (A ² Sec)	Maximum Power Dissipation (W)	Agency Approvals				
								UL	CSA	CCC	S	CE
5ST(P) 63-R	63mA	19.5	1.90	See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	0.008	0.021	0.28	Y	Y	Y	Y	Y
5ST(P) 80-R	80mA	13.2	1.68		0.015	0.036	0.29	Y	Y	Y	Y	Y
5ST(P) 100-R	100mA	11.0	1.63		0.03	0.06	0.30	Y	Y	Y	Y	Y
5ST(P) 125-R	125mA	7.02	1.29		0.05	0.11	0.30	Y	Y	Y	Y	Y
5ST(P) 160-R	160mA	4.10	0.92		0.08	0.19	0.31	Y	Y	Y	Y	Y
5ST(P) 200-R	200mA	2.60	0.77		0.15	0.33	0.32	Y	Y	Y	Y	Y
5ST(P) 250-R	250mA	1.70	0.64		0.26	0.58	0.32	Y	Y	Y	Y	Y
5ST(P) 315-R	315mA	1.30	0.57		0.46	1.01	0.33	Y	Y	Y	Y	Y
5ST(P) 400-R	400mA	0.72	0.41		0.81	1.76	0.34	Y	Y	Y	Y	Y
5ST(P) 500-R	500mA	0.57	0.47		1.4	3.1	0.34	Y	Y	Y	Y	Y
5ST(P) 630-R	630mA	0.18	0.14		0.9	1.5	0.18	Y	Y	Y	Y	Y
5ST(P) 800-R	800mA	0.14	0.14		1.6	2.5	0.20	Y	Y	Y	Y	Y
5ST(P) 1-R	1A	0.10	0.13		2.4	3.3	0.17	Y	Y	Y	Y	Y
5ST(P) 1.25-R	1.25A	0.052	0.08		4.1	5.5	0.19	Y	Y	Y	Y	Y
5ST(P) 1.6-R	1.6A	0.036	0.08		6.9	8.9	0.23	Y	Y	Y	Y	Y
5ST(P) 2-R	2A	0.028	0.08		12	15	0.26	Y	Y	Y	Y	Y
5ST(P) 2.5-R	2.5A	0.023	0.08		20	24	0.31	Y	Y	Y	Y	Y
5ST(P) 3.15-R	3.15A	0.017	0.08		33	39	0.36	Y	Y	Y	Y	Y
5ST(P) 4-R	4A	0.013	0.07		56	64	0.42	Y	Y	Y	Y	Y
5ST(P) 5-R	5A	0.0096	0.07		95	105	0.49	Y	Y	Y	Y	Y
5ST(P) 6.3-R	6.3A	0.0073	0.07		160	173	0.57	Y	Y	Y	Y	Y
5ST(P) 8-R	8A	0.0062	0.07		260	282	0.80	Y	Y			
5ST(P) 10-R	10A	0.0052	0.07		439	461	1.00	Y	Y			
5ST(P) 12.5-R	12.5A	0.0041	0.07		490	679	1.70					

Consult manufacturer for other ratings

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com


Type 5ST / 5STP

Time - lag Fuse Series (Low Breaking Capacity)


HF 5ST/5STP Series, 5x20mm Glass Tube Time - lag Fuse

RoHS 6 Compliant

Average Time Current Curve

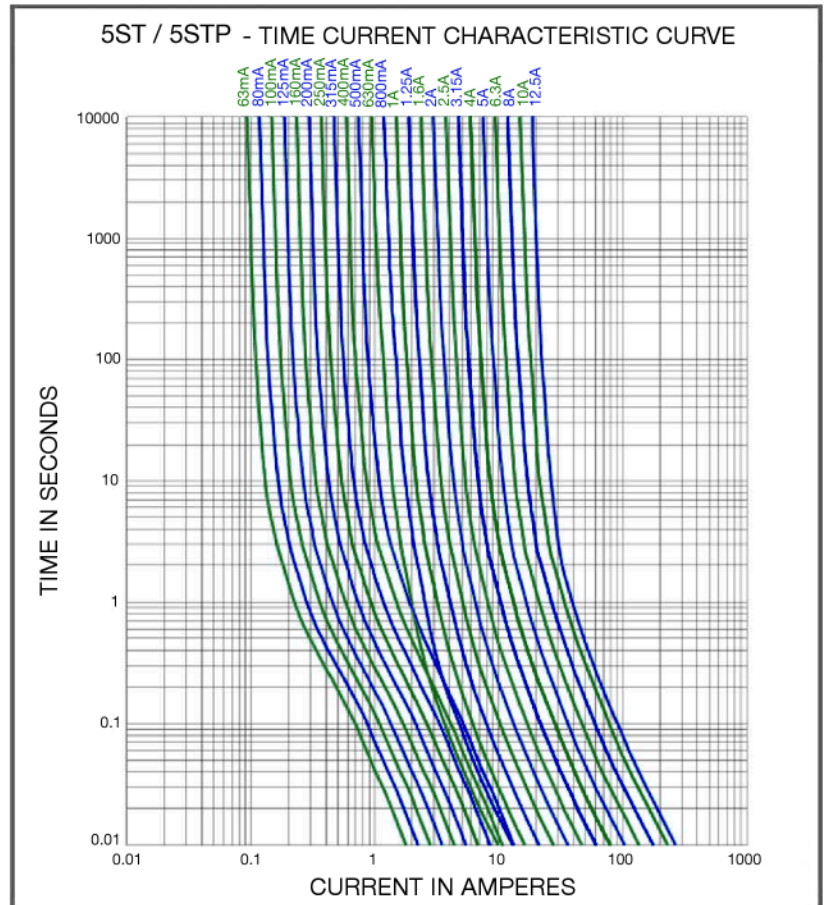


Temperature Derating Curve

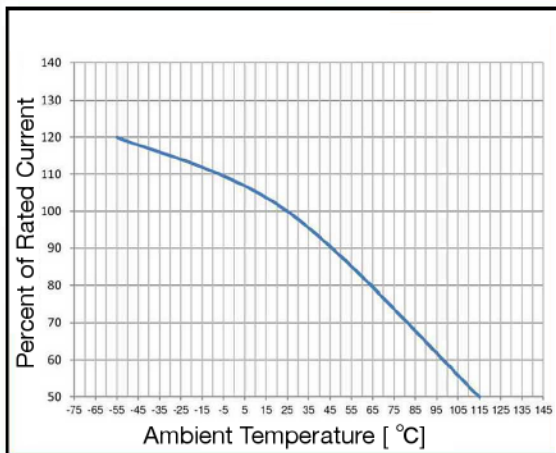

Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Soldering Parameter	
Average ramp-up rate	200 °C / second
Heating rate during preheat	typical 1 - 2 °C / second Max 4 °C / second
Final preheat temperature	within 125 °C of soldering temperature
Peak temperature T _p	260 °C
Time within +0 °C / -5 °C of actual peak temperature	10 seconds
Ramp-down rate	5 °C / second max.

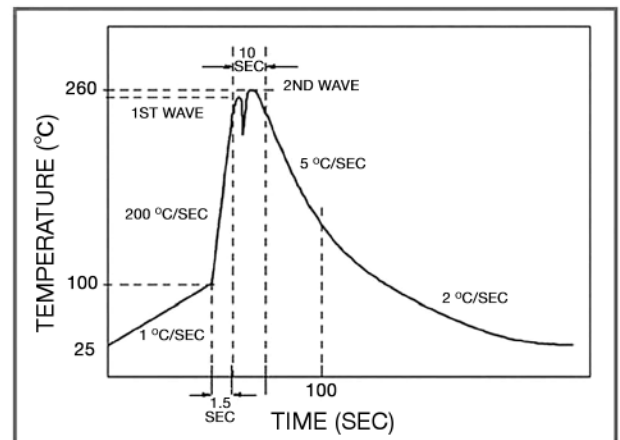

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

Type 5ST / 5STP

Time - lag Fuse Series (Low Breaking Capacity)


HF (Pb) 5ST/5STP Series, 5x20mm Glass Tube Time - lag Fuse

RoHS 6 Compliant

Fuse FGNO Explanation 06XX X [XXXX] X XX, [XXXX]=Ampere Rating

Fraction	Decimal	Milliamps	Bel FGNO[XXXX]	Fraction	Decimal	Amps	Bel FGNO[XXXX]
1/32	0.032	32	0032	1-1/4	1.25	1.25	1250
1/25	.040	40	0040	1-1/2	1.50	1.5	1500
1/20	.050	50	0050		1.60	1.6	1600
1/16	.063	63	0063		2.0	2	2000
8/100	.080	80	0080	2-1/4	2.25	2.25	2250
1/10	.100	100	0100	2-1/2	2.5	2.5	2500
1/8	.125	125	0125		3.0	3	3000
15/100	.150	150	0150		3.15	3.15	3150
	.160	160	0160	3-1/2	3.5	3.5	3500
2/10	.200	200	0200		4.0	4	4000
1/4	.250	250	0250		5.0	5	5000
3/10	.300	300	0300		6.0	6	6000
	.315	315	0315		6.3	6.3	6300
3/8	.375	375	0375		7.0	7	7000
4/10	.400	400	0400	7-1/2	7.5	7.5	7500
1/2	.500	500	0500		8.0	8	8000
6/10	.600	600	0600			10	9100
	.630	630	0630			12	9120
7/10	.700	700	0700			15	9150
3/4	.750	750	0750			20	9200
8/10	.800	800	0800			25	9250
						30	9300

Mechanical Dimensions

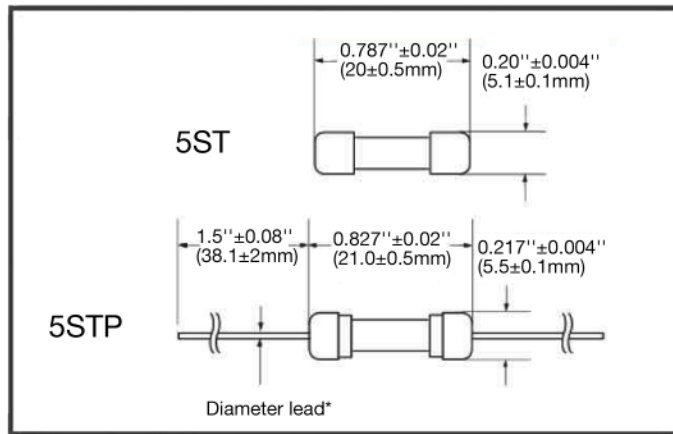

*Ratings 6.3A and less have 0.032" diameter lead
*Ratings 8A and above have 0.040" diameter lead

Ordering Information

0652 R XXXX - X X

FUSE TYPE
0652

R = RoHS Compliant

AMPERE RATING
Refer to fuse FGNO explanation table

SAFETY STANDARD CODE
1 = IEC, 250V, 63mA - 12.5A

QUANTITY & PACKAGING CODE
1 = Cartridge version, 1K / box
3 = Pigtail version, 1K bulk pack
6 = Pigtail version, Tape and Reel, 1500 / reel

Packaging

Packaging Option	Packaging Specification	Quantity	Packaging Code	Inside Tape Spacing
Bulk	N/A	1000	11	N/A
Bulk (Pigtail Type)	N/A	1000	13	N/A
Tape & Reel, 10 mm Pitch	EIA-296-F	1500	16	63

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[5ST 1.25-R](#) [5ST 5-R](#) [5STP 10-R](#) [5ST 4-R](#) [5ST 12.5-R](#) [5ST 2-R](#) [5ST 1-R](#) [5ST 8-R](#) [5ST 100-R](#) [5ST 10-R](#) [5ST](#)
[500-R](#) [5ST 125-R](#) [5STP 400-R](#) [5STP 63-R](#) [5STP 2-R](#) [5ST 200-R](#) [5ST 80-R](#) [5STP 80-R](#) [5STP 250-R](#) [5STP 1.25-R](#)
[5ST 1.6-R](#) [5STP 125-R](#) [5STP 3.15-R](#) [5STP 200-R](#) [5STP 5-R](#) [5STP 8-R](#) [5ST 400-R](#) [5ST 800-R](#) [5ST 315-R](#)
[5STP 100-R](#) [5ST 630-R](#) [5ST 63-R](#) [5ST 160-R](#) [5ST 2.5-R](#) [5STP 1-R](#) [5STP 800-R](#) [5STP 160-R](#) [5STP 630-R](#) [5ST](#)
[3.15-R](#) [5STP 315-R](#) [5STP 500-R](#) [5STP 2.5-R](#) [5ST 250-R](#) [5ST 6.3-R](#) [5STP 4-R](#) [5STP 12.5-R](#) [5STP 1.6-R](#) [5STP](#)
[6.3-R](#)