

- Back
- PushPull Power
 - Flat Cable Connectors SEK
 - *har-mik*®
 - D-Sub
 - InduCom




● Applications

Product details


09 03 164 2921
Printed board connector

Type	Type C
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	64 poles
Contact arrangement	Rows a and c
Termination	Angled solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 1 as per IEC 60603-2
Contacts	with contacts
Row pitch	2.54 mm
Board fixing	Without fixing
Coding facility	without coding facility
Current	2 A max.
Clearance/ Creepage	1.2 / 1.2 mm min.
RoHS compliant	Yes

Y (Lochbild) (board drillings)

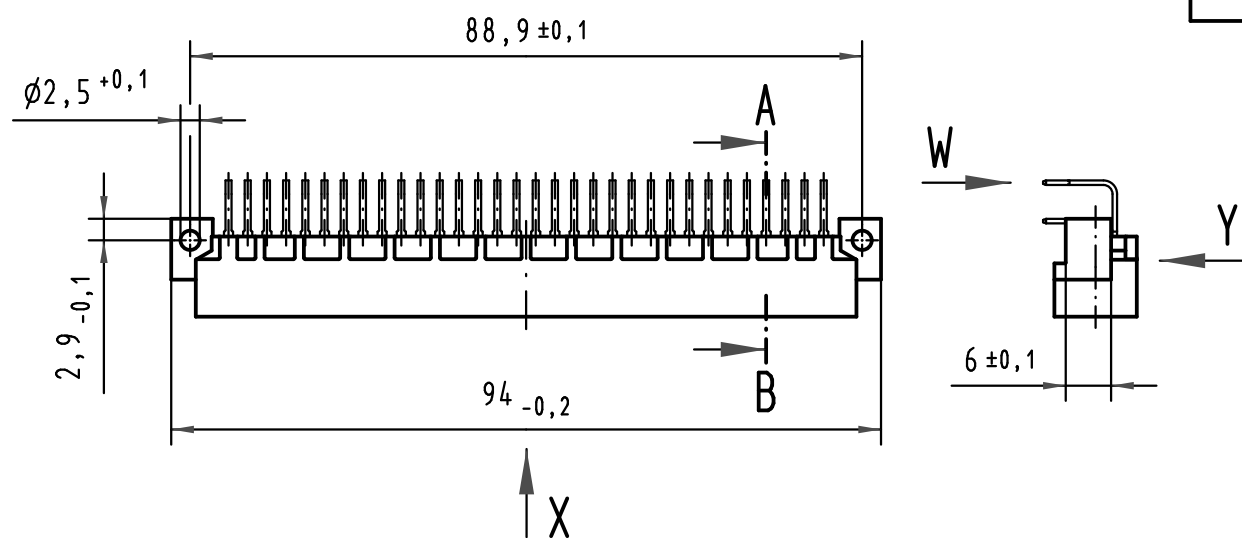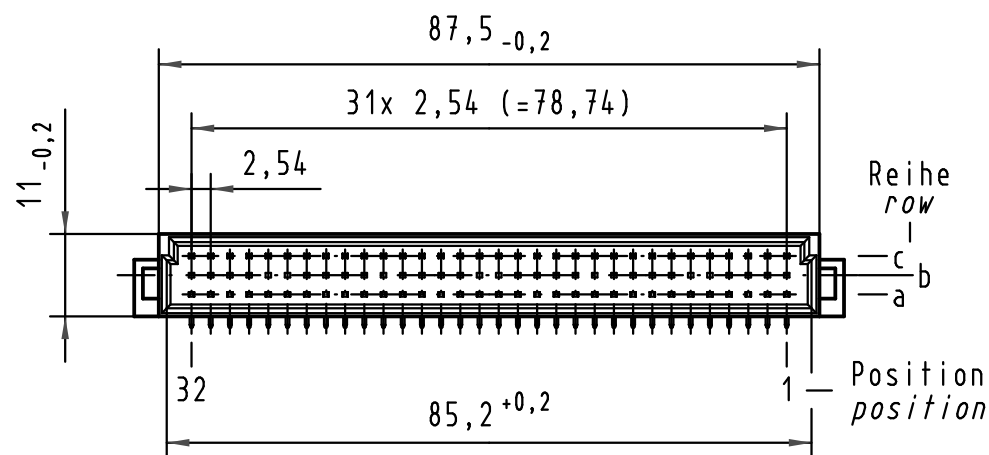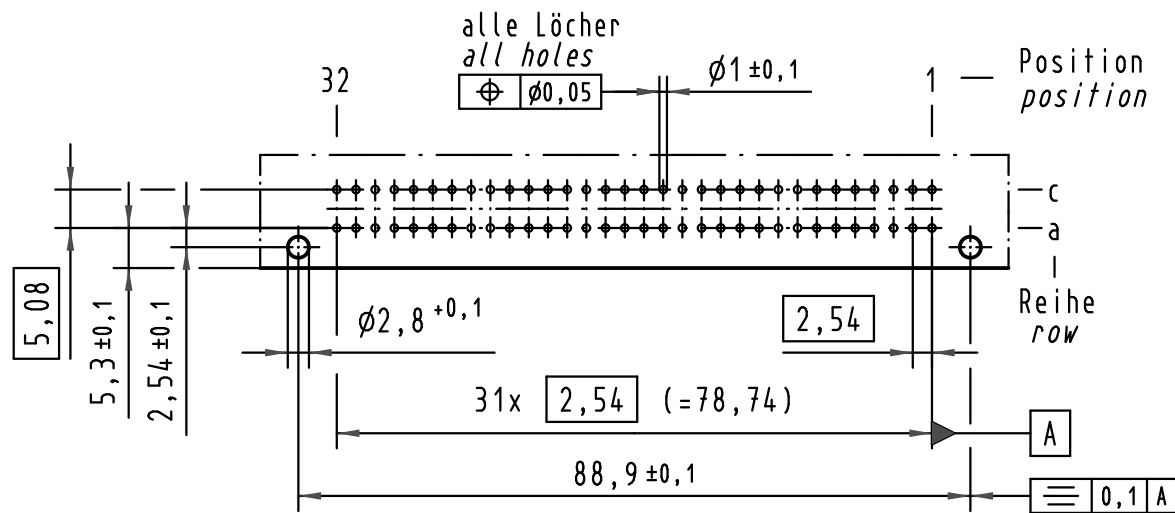


W
10:1
Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:

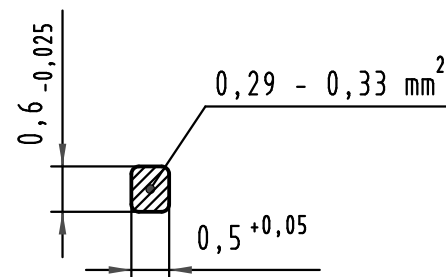

A-B
2:1

X Kontaktbelegung
contact loading

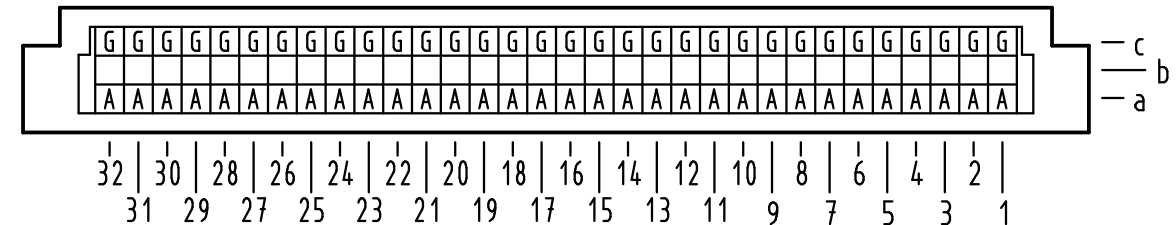

09 03 164 5921	—	min.0,76µm (30µm) Au über/over min.1,27µm (50µm) Ni
09 03 164 4921	VG	Au über/over Ni
09 03 164 7921	3	Au über/over Ni
09 03 164 6921	2	Au über/over Ni
09 03 164 2921	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating



Techn. Character.			Nicht tolerierte Maß/Free size tolerances IEC 60603-2	
	Dat.	Name	Bauform C Messerleiste Einlöt , 64 pol. type C male connector solder , 64 pol.	
			1:1 2:1 10:1	
34650	12.10.07	Hage.	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP	
27477				
Mod.	Dat.	Name	TB 09 03 164 x921	
			Sub.	