

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0903250006](#)
Status: **Active**
Overview: [Picoflex® Ribbon-Cable Connectors](#)
Description: [Picoflex® PF-50 Header, Vertical, Low Profile, with PCB Pegs, 6 Circuits](#)

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-99020-0011 \(PDF\)](#)
[Packaging Specification PK-90325-002 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General


Product Family PCB Headers
Series [90325](#)
Application Signal, Wire-to-Board
Comments Low Profile
MolexKits Yes
Overview [Picoflex® Ribbon-Cable Connectors](#)
Product Name Picoflex®
UPC 800753643208

Physical

Breakaway No
Circuits (Loaded) 6
Circuits (maximum) 6
Color - Resin Black
Durability (mating cycles max) 30
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal Brass
Material - Plating Mating Tin
Material - Resin Polyester
Net Weight 0.316/g
Number of Rows 1
Orientation Vertical
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 1.27mm
Pitch - Termination Interface 1.27mm
Polarized to Mating Part Yes
Polarized to PCB Yes
Shrouded No
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 1.2A

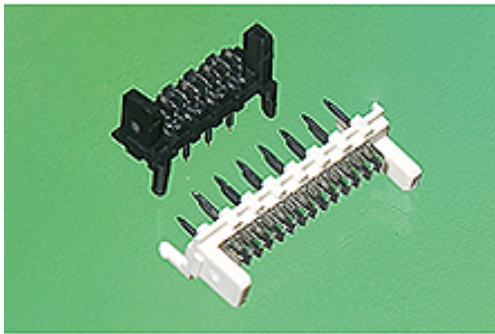

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/21/2016 (20 June
2016)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS
ELV

Green Image
Not Relevant

Search Parts in this Series

[90325](#) Series

Mates With

[90327](#) IDT Connector

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	230
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-90325-002
Product Specification	PS-99020-0011
Sales Drawing	SDA-90325

This document was generated on 09/21/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION