

- Back
 - PushPull Power
 - Flat Cable Connectors SEK
 - har-mik®
 - D-Sub
 - InduCom

● Applications


Product details

09 03 264 6824
Backplane connector

Type	Type C
Standard/Inverse	Standard
Contact gender	Female contacts
Size	Whole size
Number of contacts	64 poles
Contact arrangement	Rows a and c
Termination	Straight solder pins
Termination length	2,9 mm
Performance Class	Performance level 2 as per IEC 60603-2
Contacts	with contacts
Board fixing	Without fixing
Coding facility	without coding facility
Current	2 A max.
Clearance/ Creepage	1.2 / 1.2 mm min.
RoHS compliant	Yes

Inquiry




X
Kontaktanordnung
contact arrangement

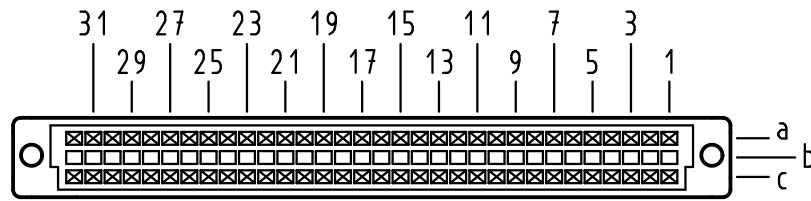



64 Einlöt-Kontakte
64 solder-contacts

- ☒ = Einlöt-Kontakt
= solder-contact
- = kinked Einlöt-Kontakt
= kinked solder-contact
- = Kontaktposition nicht belegt
= position without contact

X
(Lochbild)
(board drillings)

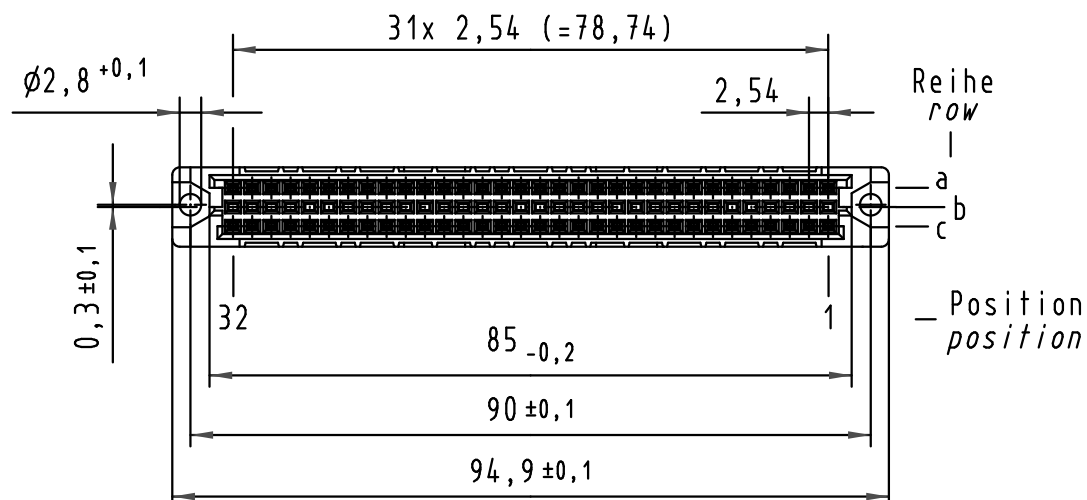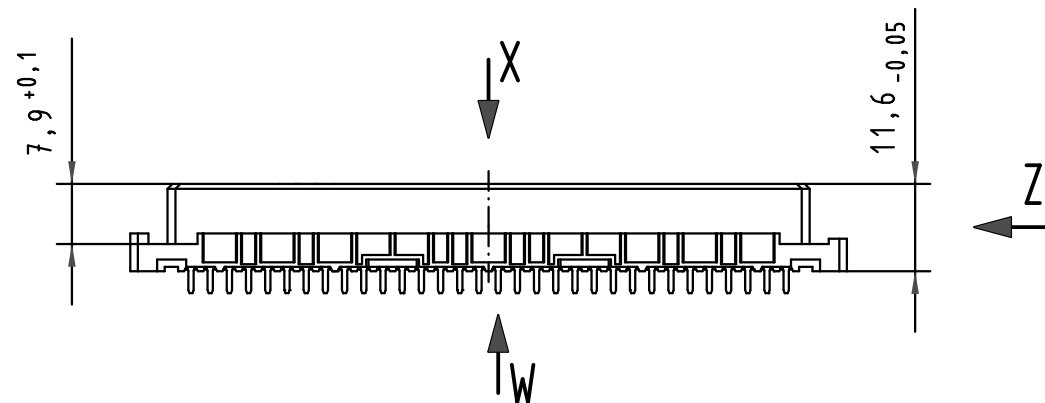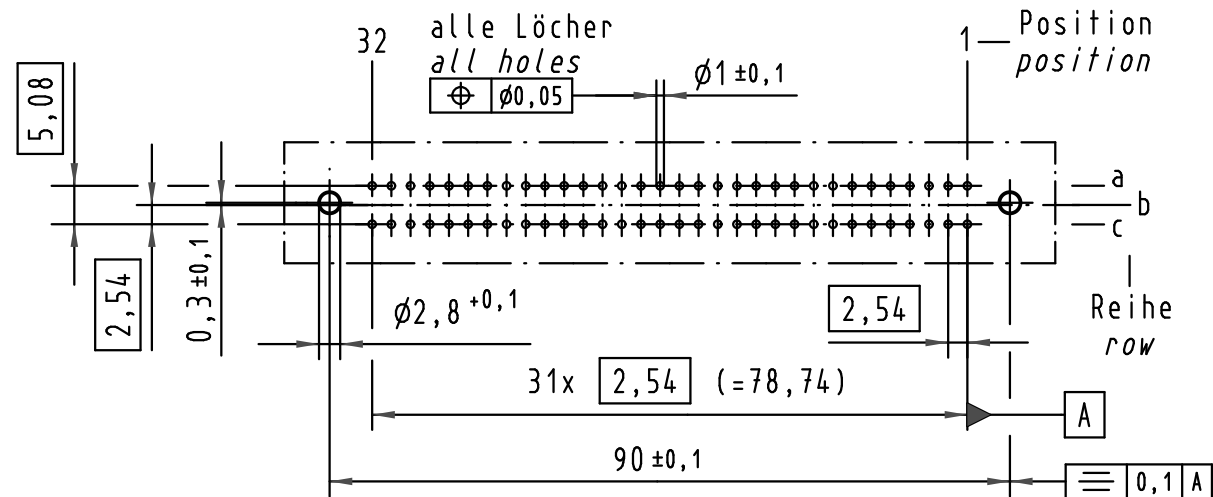


Z
2:1

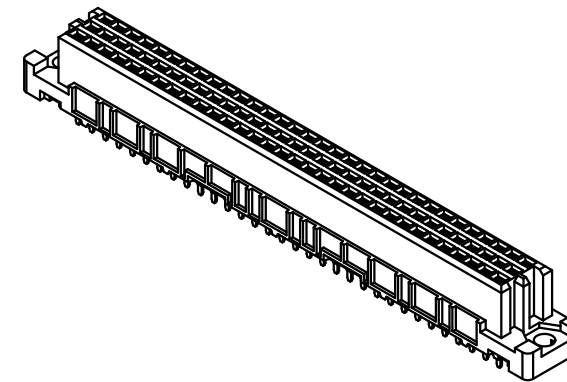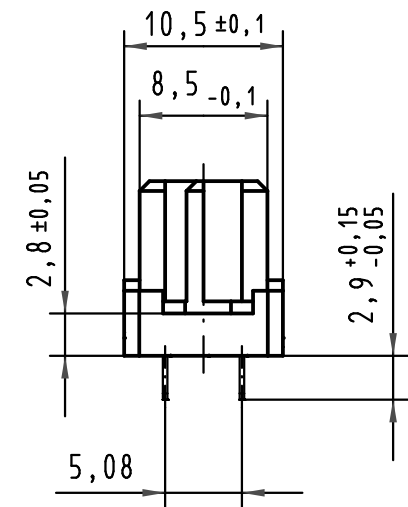

W
10:1

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:

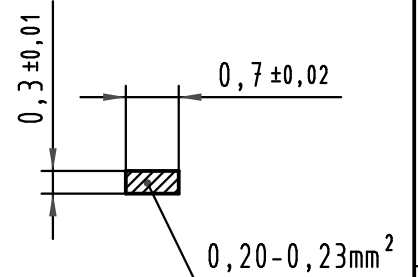

09 03 264 7824	3	Au über/over Ni
09 03 264 6824	2	Au über/over Ni
09 03 264 2824	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc.to IEC	Kontaktoberfläche contact plating

			All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size tolerances IEC 60603-2		
				Dat.	Name	Maßstab/Scale 1:1 2:1 10:1	har-bus C Federleiste Einlöt 2,9 , 64 pol. har-bus C female connector solder 2,9 , 64 pol.				
			Detail.	03.09.99	Rie.						
34650	13.08.07	Cla	Insp.	03.09.99	Pa.						
34158	18.01.07	LehT	Stand.								
30815	19.02.02	Rie.	HARTING Electronics GmbH & Co. KG				TB 09 03 264 x824			Blatt/ page /	
26083			D-32339 ESPELKAMP								
Mod.	Dat.	Name									