


Number of contacts

max. 48

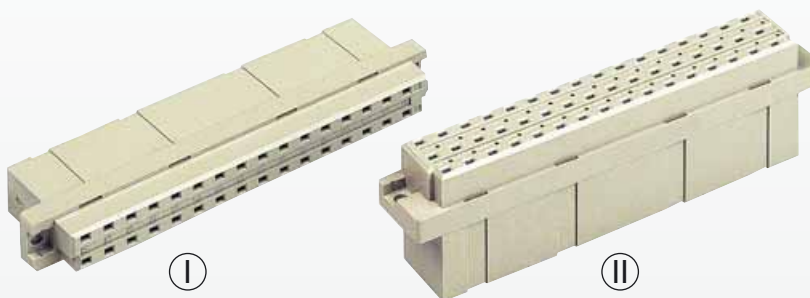

Piggyback connectors for 1 x 1 mm wrap posts

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm																
Piggyback connector for crimp contacts Order contacts separately	16	09 04 016 3201																		
I	32	09 04 032 3215																		
II	48	09 05 048 3204																		
Female FC crimp contacts individual contacts¹⁾ FC1 FC2 FC3 Bandoliered contacts FC1 (approx. 2,500 pcs.) FC2 FC3		09 06 000 6464 09 06 000 6461 09 06 000 6462 09 06 000 6454 09 06 000 6451 09 06 000 6452	Identification <table><tr><th>Identification</th><th>Wire gauge mm²</th><th>AWG</th><th>Insulations ø mm</th></tr><tr><td>1</td><td>0.09-0.25</td><td>28-24</td><td>0.7-1.5</td></tr><tr><td>2</td><td>0.14-0.56</td><td>26-20</td><td>0.8-2.0</td></tr><tr><td>3</td><td>0.50-1.50</td><td>20-16</td><td>1.6-2.8</td></tr></table> 1 2 3 0.09-0.25 0.14-0.56 0.50-1.50 28-34 26-20 20-16 0.7-1.5 0.8-2.0 1.6-2.8	Identification	Wire gauge mm ²	AWG	Insulations ø mm	1	0.09-0.25	28-24	0.7-1.5	2	0.14-0.56	26-20	0.8-2.0	3	0.50-1.50	20-16	1.6-2.8	
Identification	Wire gauge mm ²	AWG	Insulations ø mm																	
1	0.09-0.25	28-24	0.7-1.5																	
2	0.14-0.56	26-20	0.8-2.0																	
3	0.50-1.50	20-16	1.6-2.8																	
Mateable with 1 x 1 mm wrap posts			3.5 + 0.5 mm of insulation is stripped from the wires to be crimped. Crimping tools see chapter 30																	
Distance fixing brackets for female connectors Type D Type E		top (pos. 2) 09 04 000 9907 bottom (pos. 32) 09 04 000 9906																		
Type F		top (pos. 2) 09 06 000 9936 bottom (pos. 32) 09 06 000 9937																		

¹⁾ Packaging unit 1,000 pieces