
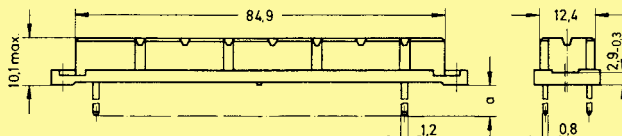
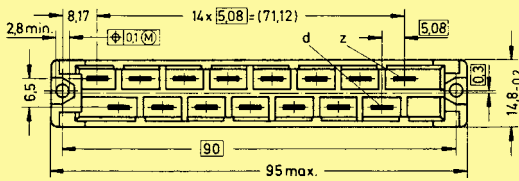



Number of contacts

15

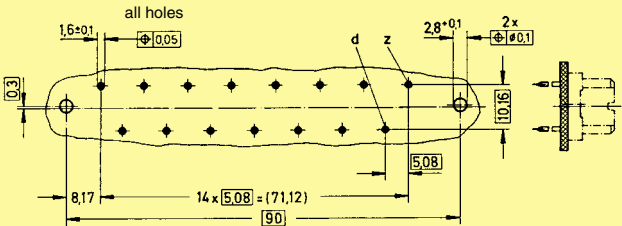

Female connectors

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm						
Female connector* with solder pins "low profile" ⁽³⁾		Performance level 1 acc. to IEC 60603-2								
2.7 mm	15	09 06 215 2812 ⁽¹⁾								
4 mm	15	09 06 215 2821 ⁽¹⁾ 09 06 215 2892 ⁽²⁾	<table border="1" data-bbox="1315 1128 1370 1308"><tr><th>a</th></tr><tr><td>2.7</td></tr><tr><td>4</td></tr><tr><td>5.5</td></tr><tr><td>7</td></tr><tr><td>10</td></tr></table>		a	2.7	4	5.5	7	10
a										
2.7										
4										
5.5										
7										
10										
5.5 mm	15	09 06 215 2890 ⁽²⁾								
7 mm	15	09 06 215 2831 ⁽¹⁾ 09 06 215 2891 ⁽²⁾								
10 mm	15	09 06 215 2841 ⁽¹⁾								
Board drillings Mounting side			Contact arrangement View from termination side 							
										

DIN Power
to 15 A¹⁾ Variant with silver plated contacts²⁾ Variant with gold plated contacts³⁾ With shroud coding, see also page 03.26