

- Back
- o PushPull Power
 - o Flat Cable Connectors SEK
 - o har-mik®
 - o D-Sub
 - o InduCom

● Applications


Product details

09 06 215 2821
Backplane connector

Type	Type H
Standard/Inverse	Standard
Contact gender	Female contacts
Size	Whole size
Number of contacts	15 poles
Contact arrangement	Rows z and d
Termination	Straight solder pins
Termination length	4.0 mm
Performance Class	Performance level 1 as per IEC 60603-2
Contacts	with contacts
Terminal finish	Silver plated
Board fixing	Without fixing
Current	15 A max.
Clearance/ Creepage	4,5 / 8,0 mm min.
RoHS compliant	Yes

Inquiry

X Kontaktanordnung/ contact arrangement




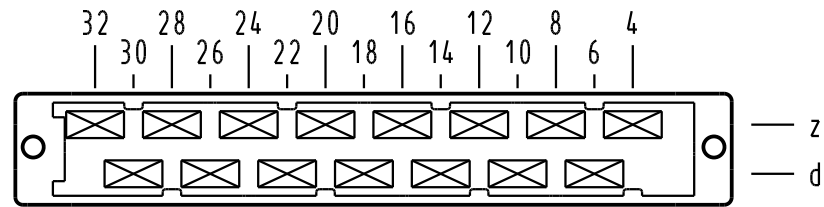


15 Kontakte
15 contacts

- = Kontaktposition belegt
= position with contact
- = Kontaktposition nicht belegt
= position without contact

Z
2:1



X (Lochbild/board drillings)

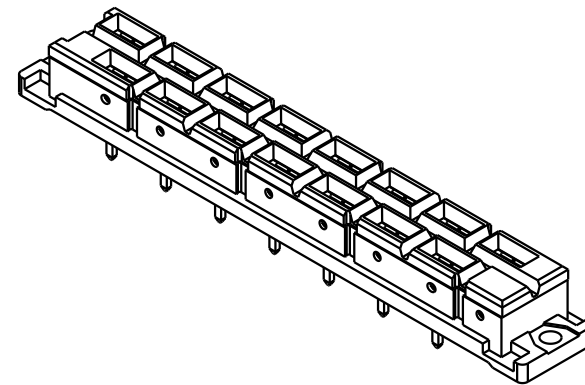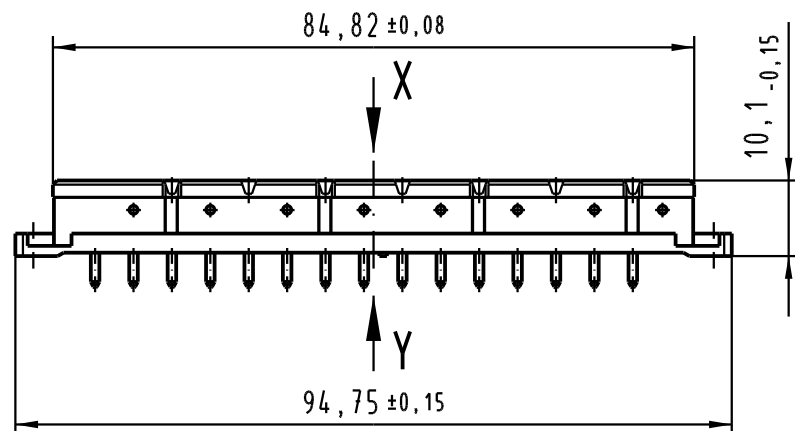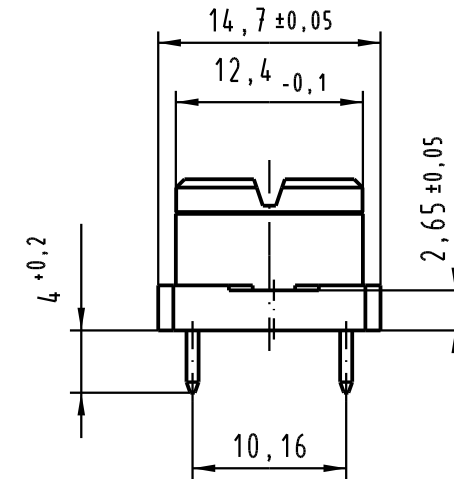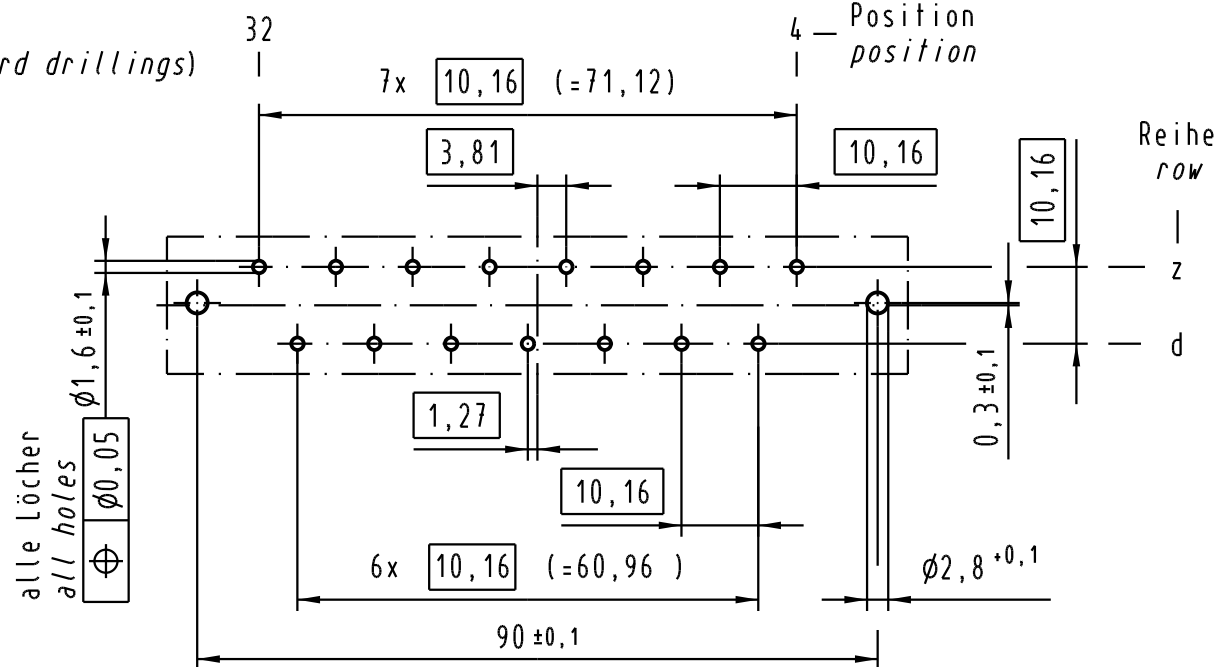

Kontaktüberfläche Ag
contact plating Ag

Y
10:1

Querschnitt der Lötanschlüsse:
cross-section of solder terminations:

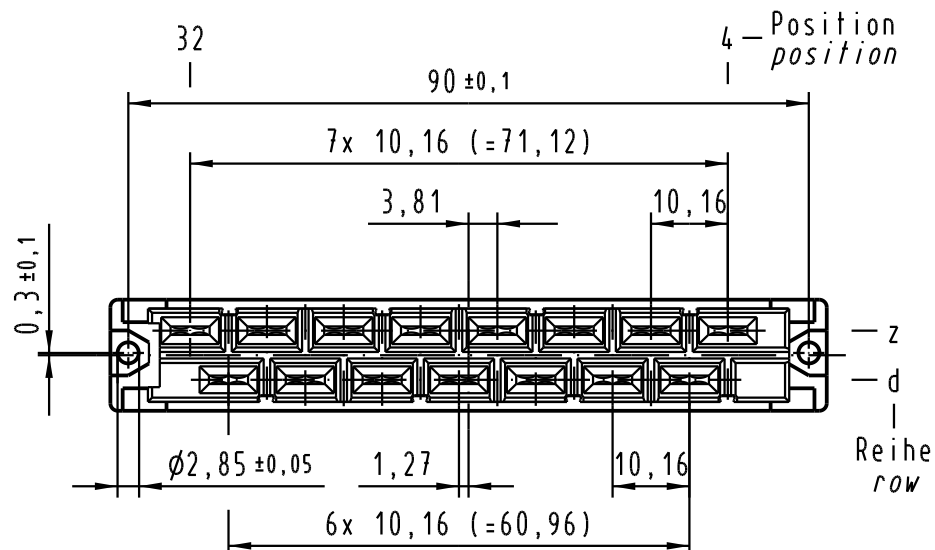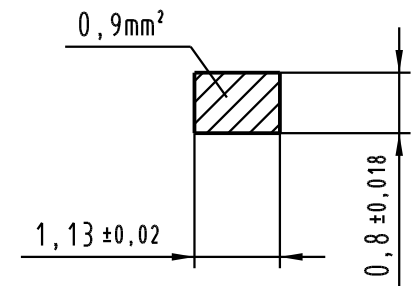

			All Dimensions in mm Original Size DIN A 3			Techn. Character. IEC 60603-2			Nicht tolerierte Maß/Free size tolerances IEC 60603-2			
				Dat.	Name	Maßstab/Scale 1 : 1 2 : 1	Bauform/type H 15 low profile Federleiste Einlöt 4,0 female connector solder 4,0					
			Detail.	25.05.04	Leh.							
			Insp.	25.05.04	kfoe							
			Stand.									
32581	21.02.05	Leh.	HARTING Electronics GmbH & Co. KG					TB 09 06 215 2821				Blatt/ page /
32041			D-32339 ESPELKAMP									
Mod.	Dat.	Name					Sub. 09 06 215 2821 Mod. 5080 v. 29.07.88					