
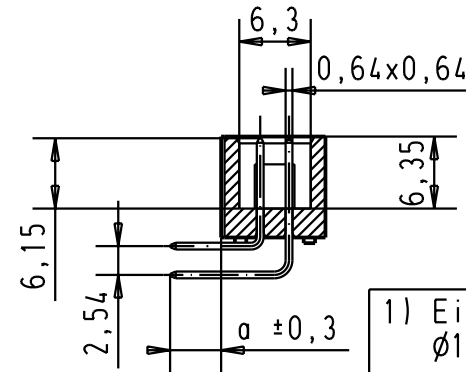
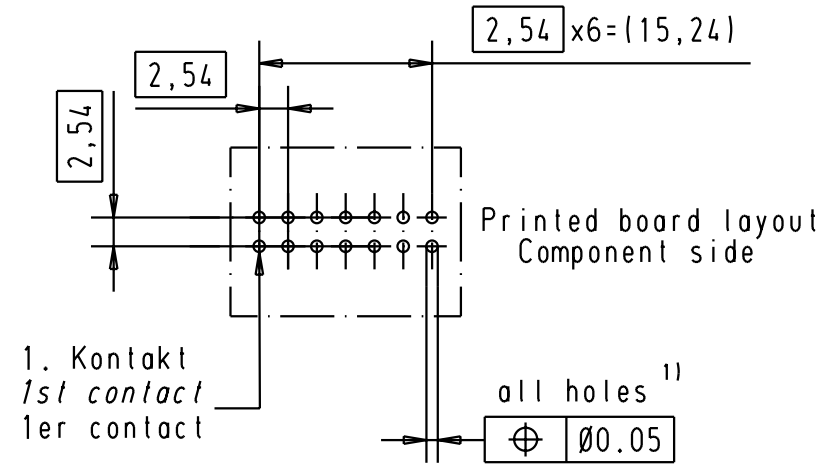
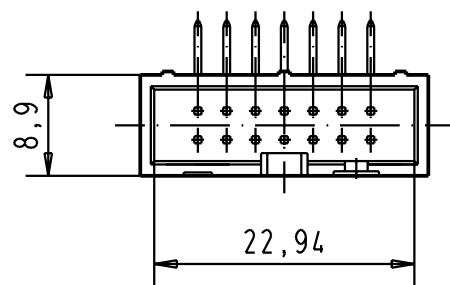
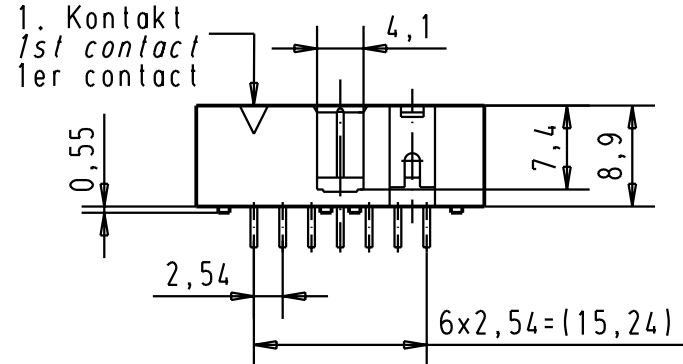


5 4 3 2 1

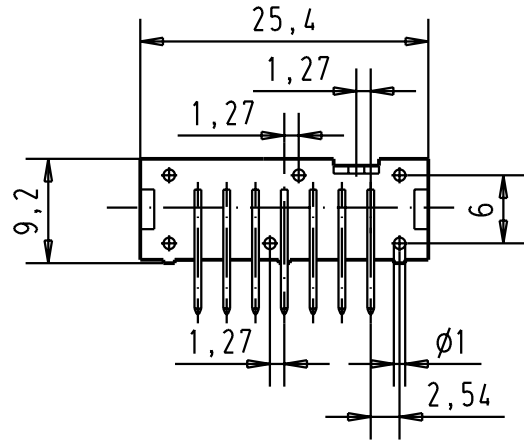

1) Einlotstifte passend für Lochungen
 $\phi 1 \pm 0,1$ nach IEC 60326-3
 Solder pins for PCB connections
 $\phi 1 \pm 0,1$ as per IEC 60326-3
 A souder pour des trous de $\phi 1 \pm 0,1$
 selon IEC 60326-3

A

09195147321	3	4,5					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 19 Male connector 14 poles, low profile, high temperature with angled pins	Maßstab/ Scale 1.5;1
09195146321	2	4,5					Detail.	25-APR-02	CV		
09195145321	0.76 μm Au	4,5					Insp.				
09195147323	3	2,9					Stand.				
09195146323	2	2,9					HARTING EURL F-95972 Paris			TB 0919514x32x	Blatt/ Page 2 / 2
09195145323	0.76 μm Au	2,9	29778	25-APR-02	CV						
Part-No.	performance level	a	Mod.	Dat.	Name						



Sub.