


inclination sensor for tilt angles B2N45H-Q20L60-2LI2-H1151



TURCK
works

Industrial
Automation

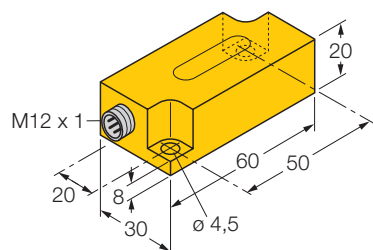




- Zero point calibration $\pm 15^\circ$
- two analogue outputs
- connectors, M12 x 1

Wiring diagram



Functional principle

The tilt angle is determined by a wear-free semi-conductor relay

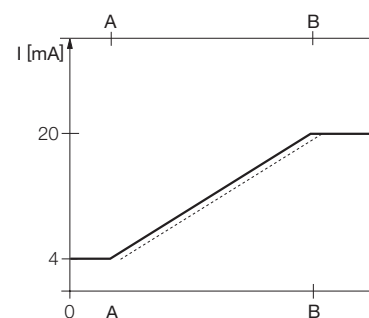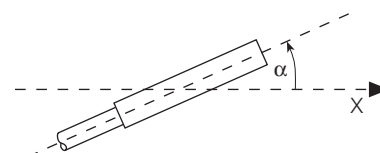

Type	B2N45H-Q20L60-2LI2-H1151
Ident-No.	1534013 M1534013
Measuring range [A...B]	-45... 45 °
Repeatability	≤ 0.2 % of measuring range A - B ≤ 0.1 %, after a warm-up time of 0.5 h
Absolute accuracy (at 25°C)	± 0.5°
Temperature drift	≤ ± 0.025 %/K
Temperature coefficient	0.03°/K
Resolution	≤ 0.1°
Ambient temperature	-30... + 70 °C
Operating voltage	10... 30VDC
No-load current I_0	≤ 20 mA
Rated insulation voltage	≤ 0.5 kV
Wire breakage / Reverse polarity protection	yes / yes
Output function	4-wire, analogue output
current output	4... 20 mA
Load resistance current output	≤ 0.2 kΩ short-circuit proof to U_b (= 10...30 VDC)
Output recovery time	≤ 12 ms
Reaction time	0.05... 0.1 s time for the output signal to achieve 90% full scale if the angle changes from -45° to +45°
Housing	rectangular, Q20L60
Dimensions	60 x 30 x 20 mm
Housing material	plastic, PBT-GF20-V0
Connection	Connectors, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Degree of protection	IP68


**inclination sensor
for tilt angles
B2N45H-Q20L60-2LI2-H1151**

TURCK
works

Industrial
Automation

Mounting instructions

Tilt angle

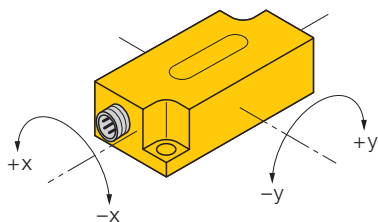

**inclination sensor
for tilt angles
B2N45H-Q20L60-2LI2-H1151**

