

Number of contacts

9–37



Turned solder pins, right angled, bracket, board lock and female screw

Identification		No. of contacts	Part No.	
			male connectors	female connectors
Connectors with 47 pF C filter		9	09 64 124 721 .	09 64 114 721 .
		15	09 64 224 721 .	09 64 214 721 .
		25	09 64 324 721 .	09 64 314 721 .
		37	09 64 424 721 .	09 64 414 721 .
Connectors with 470 pF C filter		9	09 64 124 722 .	09 64 114 722 .
		15	09 64 224 722 .	09 64 214 722 .
		25	09 64 324 722 .	09 64 314 722 .
		37	09 64 424 722 .	09 64 414 722 .
Connectors with 1000 pF C filter		9	09 64 124 723 .	09 64 114 723 .
		15	09 64 224 723 .	09 64 214 723 .
		25	09 64 324 723 .	09 64 314 723 .
		37	09 64 424 723 .	09 64 414 723 .
Connectors with 3900 pF C filter		9	09 64 124 724 .	09 64 114 724 .
		15	09 64 224 724 .	09 64 214 724 .
		25	09 64 324 724 .	09 64 314 724 .
		37	09 64 424 724 .	09 64 414 724 .
Please insert digit for flange thread				
4-40 UNC ▶		4		
M3 ▶		5		

4-40 UNC ▶ 4
M3 ▶ 5

Number of contacts

9–37




Turned solder pins, right angled, bracket, board lock and female screw

Identification

Drawing


Dimensions in mm

Male connector

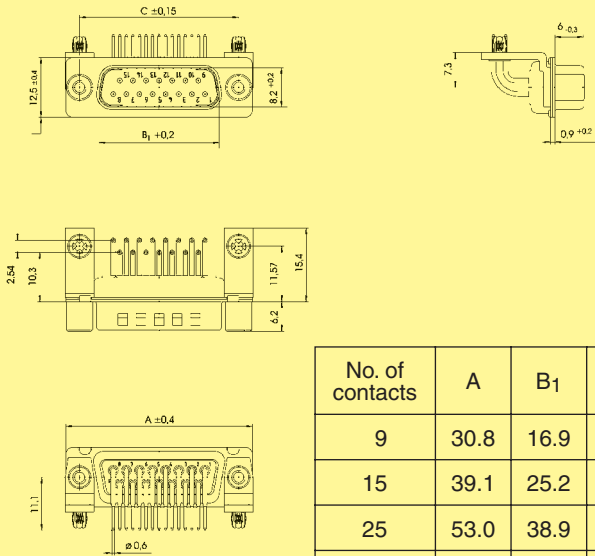


No. of contacts	A	B ₁	B ₂	C	E	F
9	30.8	16.9	16.4	25.00	1.37	2.74
15	39.1	25.2	24.7	33.30	1.37	2.74
25	53.0	38.9	38.5	47.04	1.40	2.77
37	69.3	55.3	54.9	63.50	1.40	2.77

Female connector

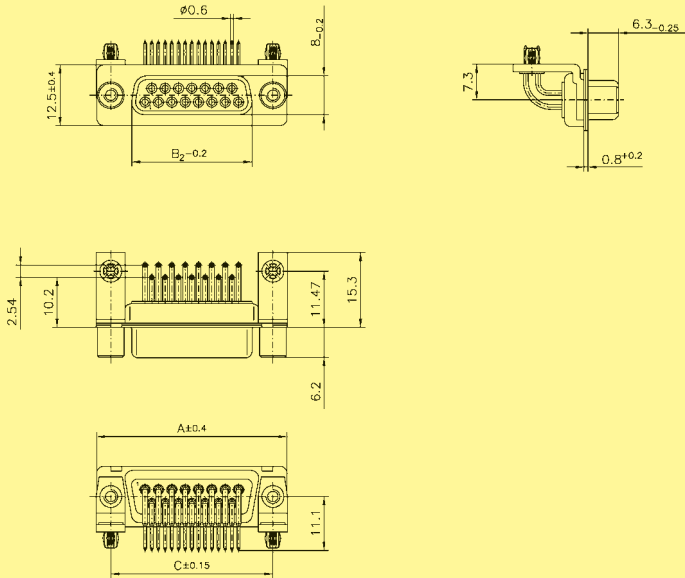

Board drillings



D-Sub