

Number of contacts

9–37

Mounting height



Standard Versions

SMC stamped solder pins, angled with grounding board locks

Identification	No. of contacts	Part No.	
Performance levels Explanations see page 05.170 Other performance levels on request		Performance level 3	Performance level 2
Male connector metal shell with dimples		2.84 mm pitch	2.84 mm pitch
	9	09 65 167 781 . 1)	09 65 167 681 . 1)
	15	09 65 267 781 . 1)	09 65 267 681 . 1)
	25	09 65 367 781 . 1)	09 65 367 681 . 1)
	37	09 65 467 781 . 1)	09 65 467 681 . 1)
		2.54 mm pitch	2.54 mm pitch
	9	09 65 166 781 .	09 65 166 681 .
	15	09 65 266 781 .	09 65 266 681 .
	25	09 65 366 781 .	09 65 366 681 .
	37	09 65 466 781 .	09 65 466 681 .
Female connector metal shell		2.84 mm pitch	2.84 mm pitch
	9	09 66 157 761 . 1)	09 66 157 661 . 1)
	15	09 66 257 761 . 1)	09 66 257 661 . 1)
	25	09 66 357 761 . 1)	09 66 357 661 . 1)
	37	09 66 457 761 . 1)	09 66 457 661 . 1)
		2.54 mm pitch	2.54 mm pitch
	9	09 66 156 761 .	09 66 156 661 .
	15	09 66 256 761 .	09 66 256 661 .
	25	09 66 356 761 .	09 66 356 661 .
	37	09 66 456 761 .	09 66 456 661 .
Please insert digit for flange thread or fitted female screw locks Ø 3.1 mm hole ▶ 0 ¹⁾ M3 ▶ 1 4-40 UNC ▶ 2 fitted screw locks 4-40 UNC ▶ 3			

Number of contacts

Mounting height

9–37



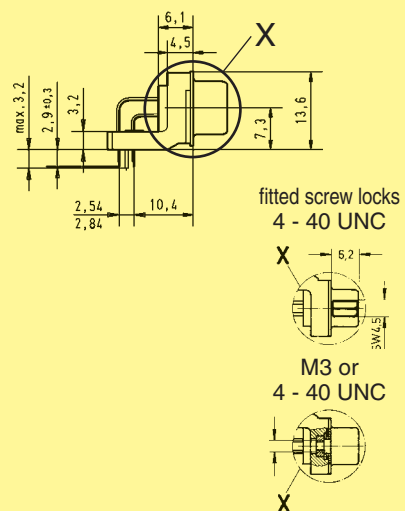
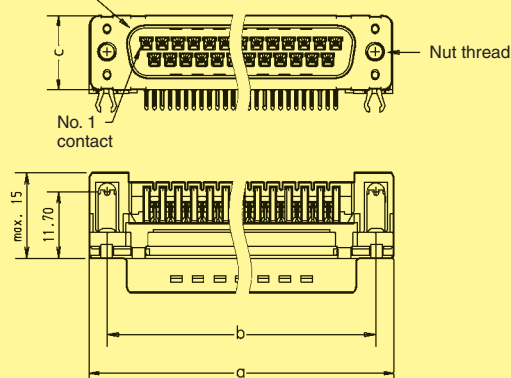
SMC stamped solder pins, angled with grounding board locks

Identification


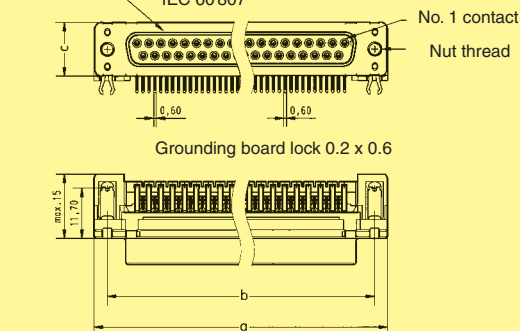
Drawing

Dimensions in mm

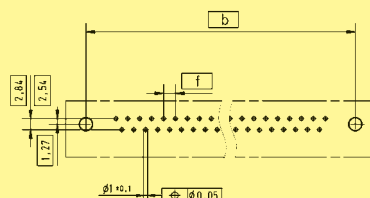
Male connector

Mating face acc. to: DIN 41 652 · CECC 75 301-802
IEC 60 807


Female connector

Mating face acc. to: DIN 41 652 · CECC 75 301-802
IEC 60 807


Board drillings



	a	b±0.1	c	f
9	30.90	25.00	12.50	2.74
15	39.20	33.30	12.50	2.74
25	53.10	47.00	12.50	2.76
37	69.40	63.50	12.50	2.76