
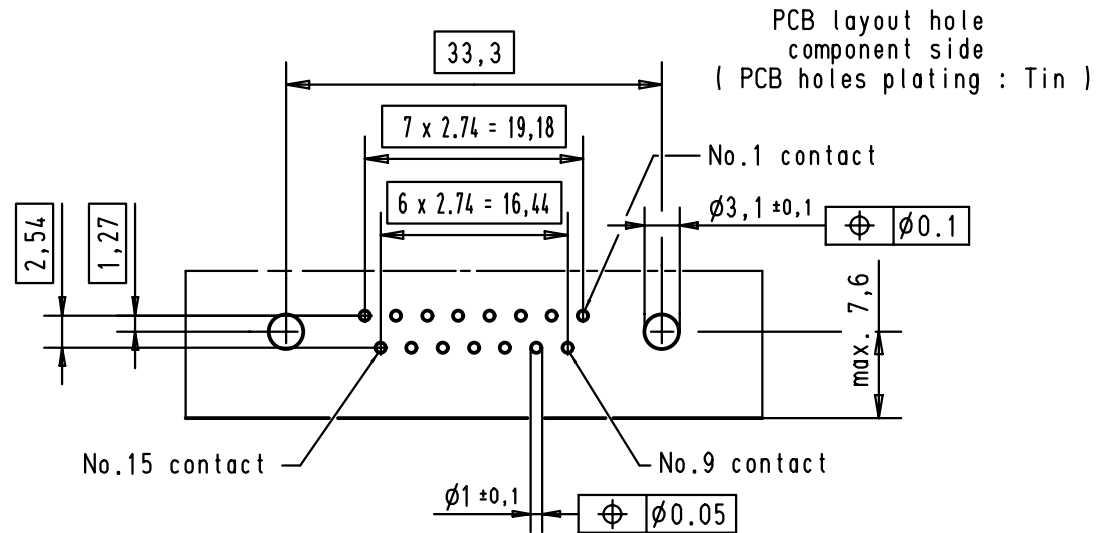
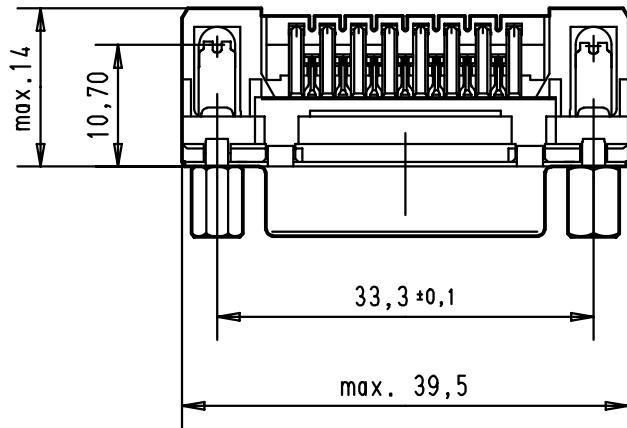
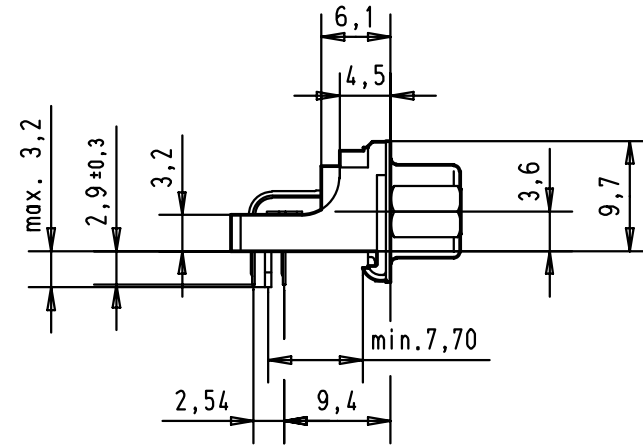
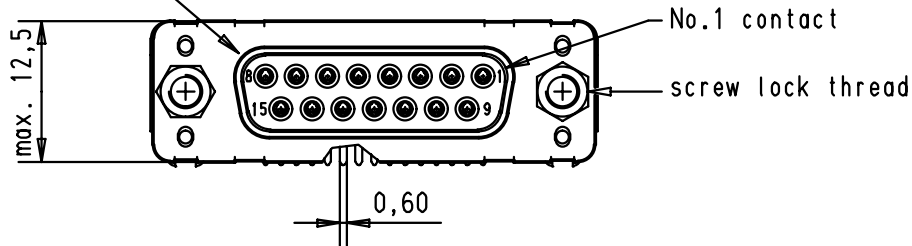


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802



Connector retention and insertion forces on the PCB = 25 / 80 newtons

| A |                |                   |                   |       |            |      | Dat.                          |            | Name | <br>All Dim. in mm<br>Orig. Size DIN A 4 | D-Sub 15 poles low profil angle<br>female,solder pin with screw lock<br>and grounding board lock. | Maßstab/<br>Scale<br><br>1.5:1 |
|---|----------------|-------------------|-------------------|-------|------------|------|-------------------------------|------------|------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------|
|   |                |                   |                   |       |            |      | Detail.                       | 02/sept/00 | jfb  |                                                                                                                               |                                                                                                   |                                |
|   |                |                   |                   |       |            |      | Insp.                         |            |      |                                                                                                                               |                                                                                                   |                                |
|   |                |                   |                   |       |            |      | Stand.                        |            |      |                                                                                                                               |                                                                                                   |                                |
|   | 09 66 252 6617 | 4-40 UNC          | 2                 | 27961 | 24/nov/00  | jfb  |                               |            |      |                                                                                                                               |                                                                                                   |                                |
|   | 09 66 252 7617 | 4-40 UNC          | 3                 | 27952 | 26/oct/00  | jfb  |                               |            |      |                                                                                                                               |                                                                                                   |                                |
|   | 09 66 252 5617 | 4-40 UNC          | 0.76 µm Au        | 27948 | 02/sept/00 | jfb  |                               |            |      |                                                                                                                               |                                                                                                   |                                |
|   | Part number    | Screw lock thread | Performance level | Mod.  | Dat.       | Name | HARTING EURL<br>F-95972 Paris |            |      | <br>Sub.                                 | TB 0966252x61x                                                                                    | Blatt/ Page<br>3 / 6           |

09 66 252 6617  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | with screw lock UNC 4-40          |
| Performance level  | Performance level 2               |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats

2D files

Typenblatt

Typenblatt

09 66 252 7617  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | with screw lock UNC 4-40          |
| Performance level  | Performance level 3               |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 252 5617  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | with screw lock UNC 4-40          |
| Performance level  | Performance level S4              |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF