

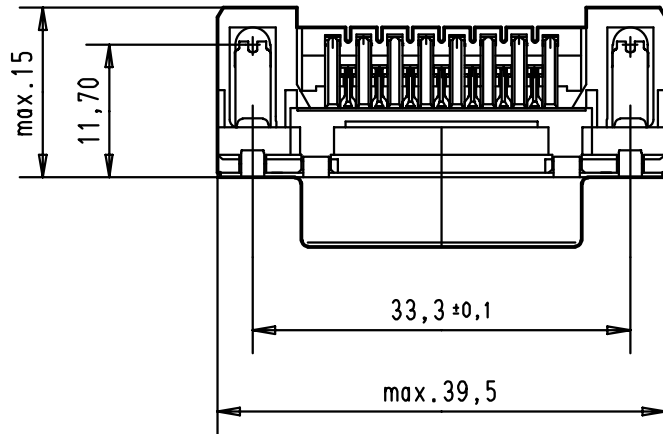
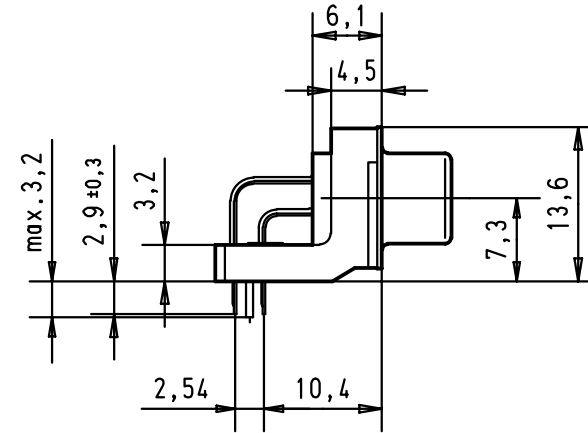


5 4 3 2 1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

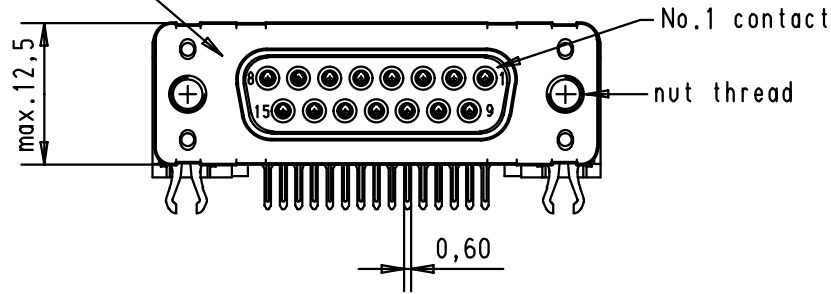


PCB layout hole
component side
(PCB holes plating : Tin)

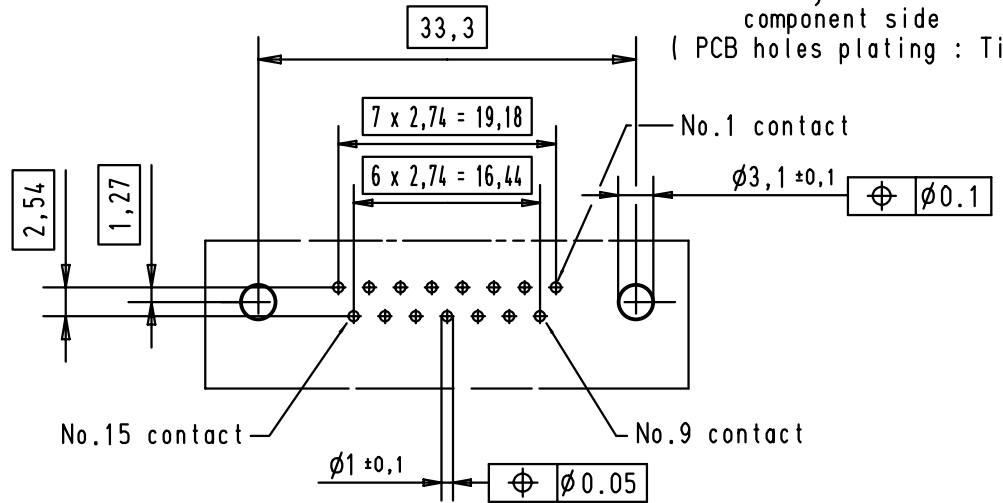

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 66 252 6611	M 3	2			
09 66 252 7611	M 3	3			
09 66 252 5611	M 3	0.76 µm Au			
09 66 252 6612	4-40 UNC	2			
09 66 252 7612	4-40 UNC	3			
09 66 252 5612	4-40 UNC	0.76 µm Au	27960	05/dec/00	ALSPACE
Part number	Nut thread	Performance level	Mod.	Dat.	Name

	Dat.	Name
Detail.	05/dec/00	ALSPACE
Insp.		
Stand.		



All Dim. in mm
Orig. Size DIN A 4

D-Sub 15 poles standard angle
female, solder pin with nut and
grounding board lock.

Maßstab/
Scale

1.5:1

HARTING EURL
F-95972 Paris



TB 0966252x61x

Sub.

Blatt/ Page

5 / 6