

- Back
- Flat Cable Connectors SEK

har-mik®

D-Sub

InduCom

● Applications

Product details

09 67 515 7615

D-Sub IP 67 PCB connector

Gender	Male connector, straight
Protection level	IP 67
Termination	turned solder cups
Number of contacts	15
Shell	tinned metal shell with dimples
Flange	Rear blind nut UNC 4-40
Performance level	S4 (0,76 •m Au min)
Insulation material	Thermoplastic, glass-fibre filled, UL 94-V0
Mounting frame	rear plastic mounting plate
Frame material	Thermoplastic, glass-fibre filled, UL 94-V0
Sealing ring	Silicone, glued on frame
RoHS compliant	Yes



Inquiry

Available Downloads


Title	Format	
Data sheet	PDF	download

5 4 3 2 1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75.01-802

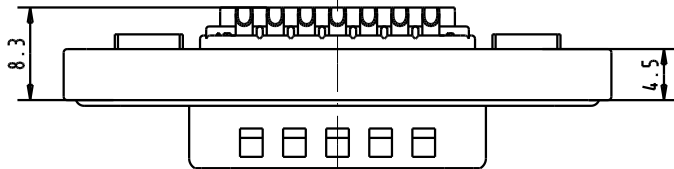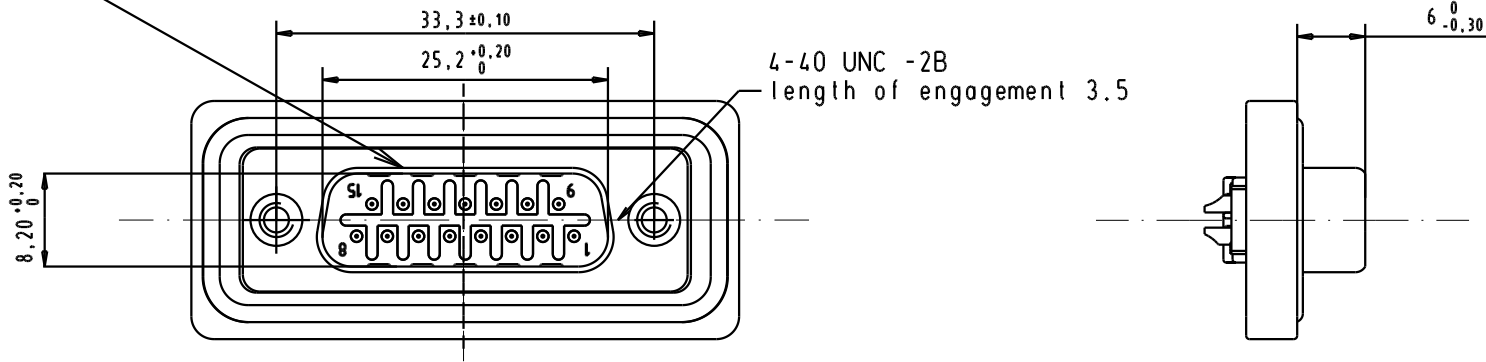

- 1) Protection standard IP 67 according to IEC 529 / DIN 40050.
- 2) cable: AWG 20 max

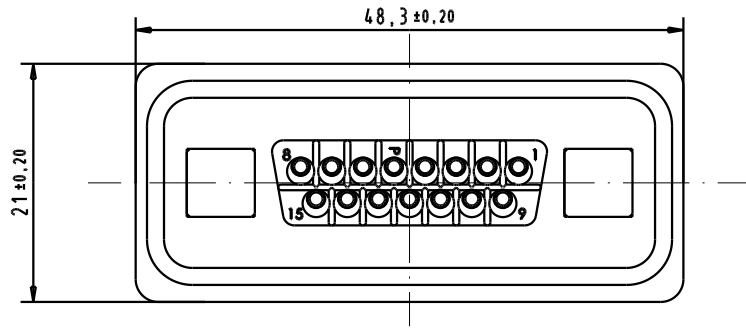

09 67 515 7615	Au plating $0,76 \mu\text{m mini}$
Part Number	Performance Level

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB IP67 male 15 Poles straight solder cup with 4-40 UNC nut plastic frame	Maßstab/ Scale	
			Detail.	10/10/03	S.H.				
			Insp.						
			Stand.						
			HARTING ELEKTRONIK F-95972 Paris					TB 09 67 515 7615	Blatt/ Page /
31559	10/10/03	S.H.							
Mod.	Dat.	Name					Sub.		

