

Number of contacts

9–25



IP 67, angled turned solder pins,
with rear plastic mounting plate, bracket and board lock

D-Sub

Identification	No. of contacts	Part No.	
		S4 ¹⁾	
Male connector metal shell with dimples	9	09 67 509	658
	15	09 67 515	658
	25	09 67 525	658
Please insert digit for flange thread			
	4-40 UNC ▶ 7		
	M3 ▶ 9		
Female connector metal shell	9	09 67 509	758
	15	09 67 515	758
	25	09 67 525	758
Please insert digit for flange thread			
	4-40 UNC ▶ 6		
	M3 ▶ 8		

¹⁾ S4: ≥ 0.76 µm Au (30 µinch)

D-Sub

Number of contacts

9-25

IP 67, angled turned solder pins,
with rear plastic mounting plate, bracket and board lock




Identification


Drawing

Dimensions in mm

Male connector
9 – 25 contacts

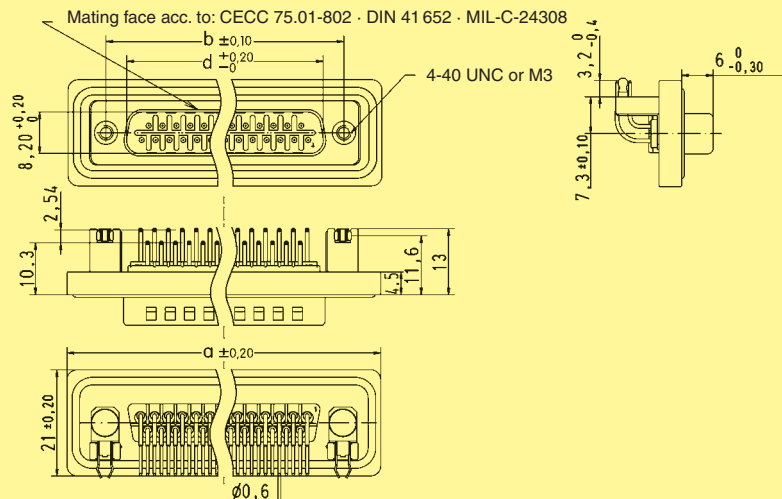

Female connector
9 – 25 contacts

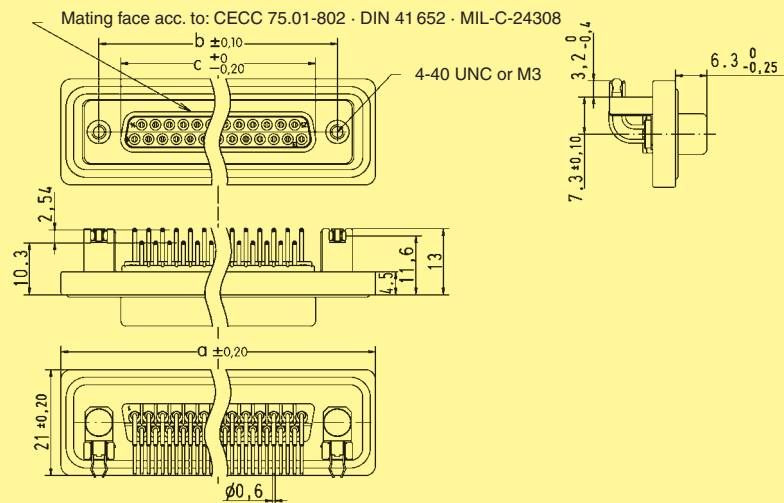

	a	b	c	d	g	h	i
9	40.0	25.00	16.4	16.9	4 x $2.74 = 10.96$	3 x $2.74 = 8.22$	25.0
15	48.3	33.30	24.7	25.2	7 x $2.74 = 19.18$	6 x $2.74 = 16.44$	33.3
25	62.0	47.04	38.5	38.9	12 x $2.76 = 33.12$	11 x $2.76 = 30.36$	47.0

Board drillings

