

Number of contacts

9–50



IP 67, turned solder cups, with rear metal mounting plate

Identification	No. of contacts	Part No.	
		S41)	
Male connector metal shell with dimples	9	09 67 609	. 615
	15	09 67 615	. 615
	25	09 67 625	. 615
	37	09 67 637	. 615
	50	09 67 650	. 615
Please insert digit for flange thread	4-40 UNC ▶ 7		
	M3 ▶ 9		
Female connector metal shell	9	09 67 609	. 715
	15	09 67 615	. 715
	25	09 67 625	. 715
	37	09 67 637	. 715
	50	09 67 650	. 715
Please insert digit for flange thread	4-40 UNC ▶ 6		
	M3 ▶ 8		

D-Sub - W

¹⁾ S4: ≥ 0.76 µm Au (30 µinch)

Number of contacts

9–50



IP 67, turned solder cups, with rear metal mounting plate


Identification

Drawing

Dimensions in mm


Male connector

9 – 50 contacts

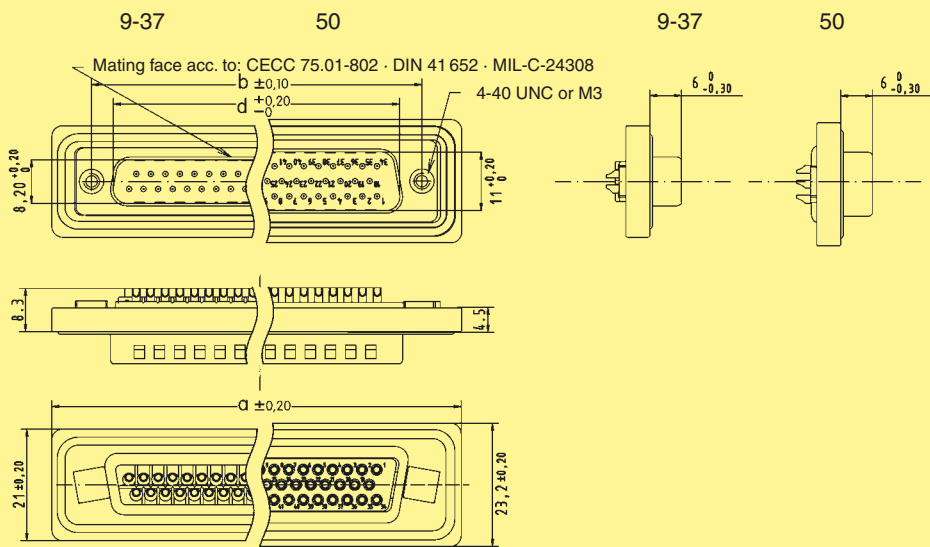

Female connector

9 – 50 contacts

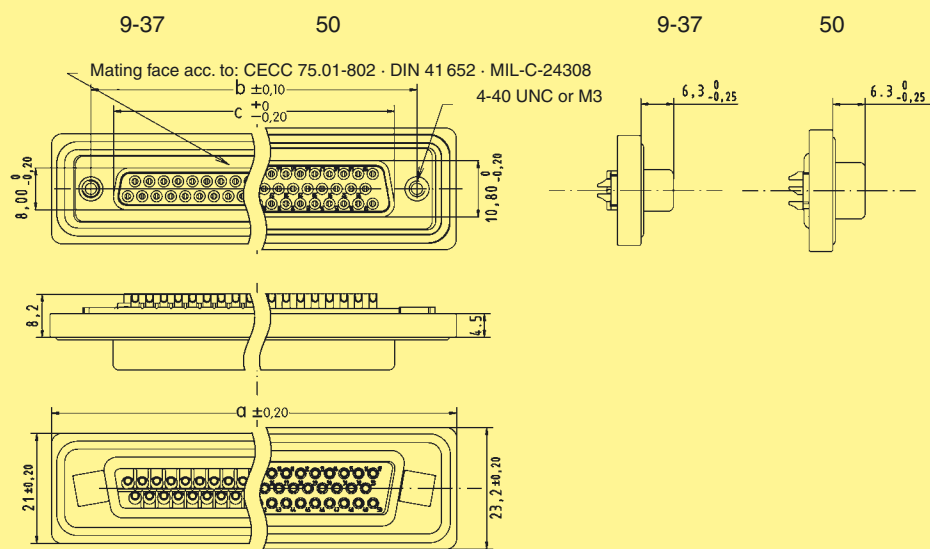

	a	b	c	d
9	40.0	25.00	16.4	16.9
15	48.3	33.30	24.7	25.2
25	62.0	47.04	38.5	38.9
37	78.5	63.50	54.9	55.3
50	76.1	61.10	52.5	52.8