


Number of contacts

9–50

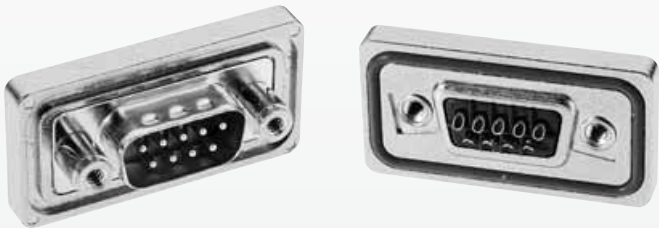

IP 67, turned solder cups, with front metal mounting plate

D-Sub - W

Identification	No. of contacts	Part No.	
		S4 ¹⁾	
Male connector metal shell with dimples	9 15 25 37 50	09 67 809 09 67 815 09 67 825 09 67 837 09 67 850	. 615 . 615 . 615 . 615 . 615
Please insert digit for flange thread			
4-40 UNC ▶	7		
M3 ▶	9		
Female connector metal shell	9 15 25 37 50	09 67 809 09 67 815 09 67 825 09 67 837 09 67 850	. 715 . 715 . 715 . 715 . 715
Please insert digit for flange thread			
4-40 UNC ▶	6		
M3 ▶	8		

¹⁾ S4: ≥ 0.76 µm Au (30 µinch)

Number of contacts

9–50



IP 67, turned solder cups, with front metal mounting plate


Identification

Drawing

Dimensions in mm


Male connector

9 – 50 contacts

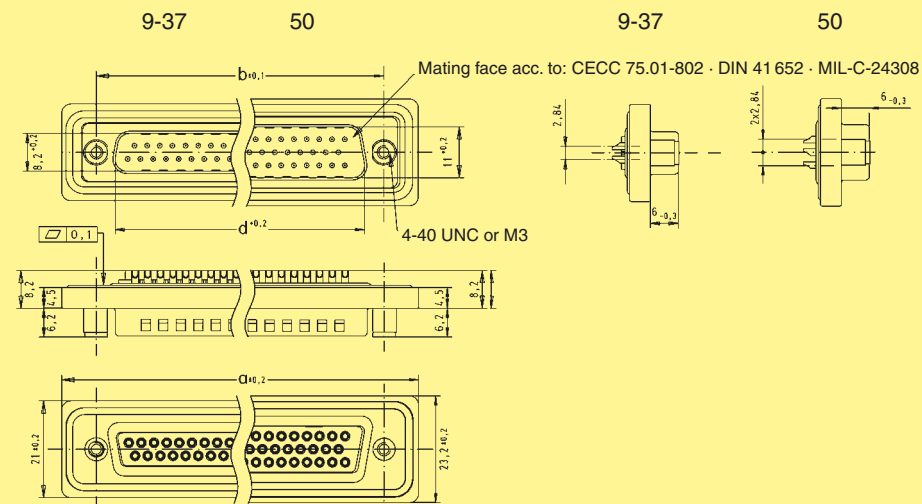


Female connector

9 – 50 contacts

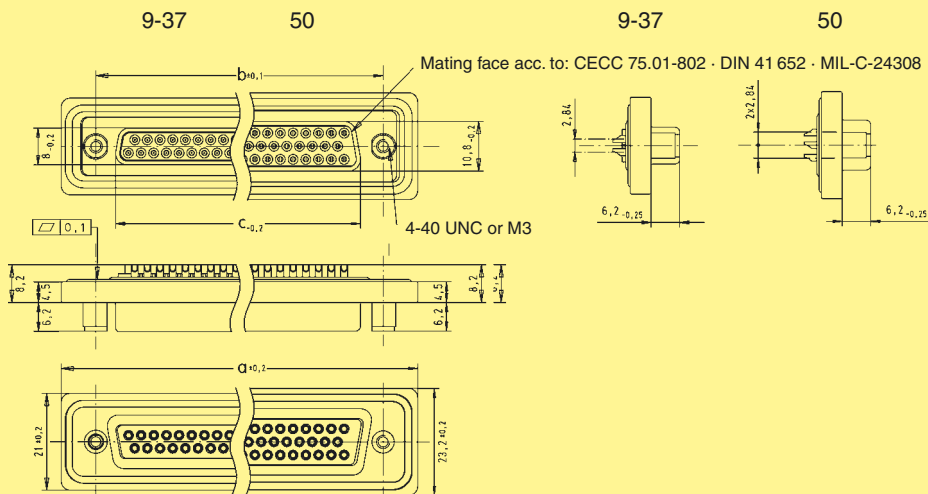

	a	b	c	d
9	40.0	25.00	16.4	16.9
15	48.3	33.30	24.7	25.2
25	62.0	47.04	38.5	38.9
37	78.5	63.50	54.9	55.3
50	76.1	61.10	51.3	52.8

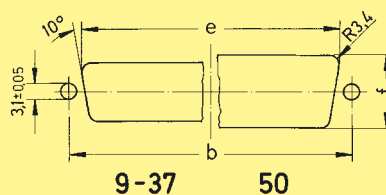Panel cut out
for front/rear mountValues are taken from the
CECC 75 301-802

Front mount

	$b_{\pm 0.13}$	$e_{\pm 0.2}$	$f_{\pm 0.2}$
9	25.0	22.2	12.3
15	33.3	30.5	12.3
25	47.0	44.3	12.3
37	63.5	60.7	12.3
50	61.1	58.3	15.1

Rear mount

	$b_{\pm 0.13}$	$e_{\pm 0.2}$	$f_{\pm 0.2}$
9	25.0	20.5	11.4
15	33.3	28.8	11.4
25	47.0	42.5	11.4
37	63.5	59.1	11.4
50	61.1	56.3	14.1