
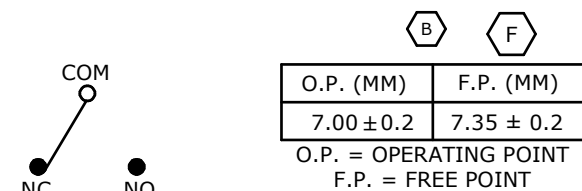
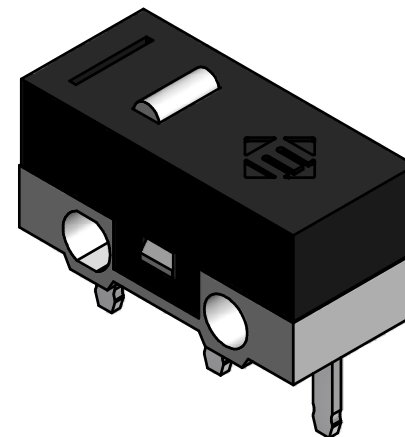




P.C. MOUNTING

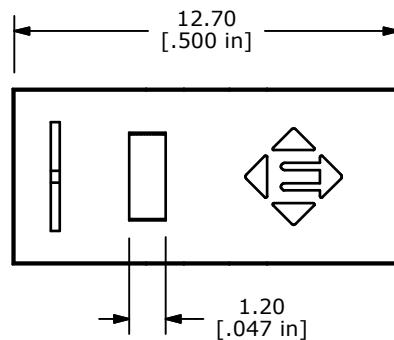

CIRCUIT: SPDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X ± 0.4
X.XX ± 0.25
- RATING: 3A @125VAC
1.5A @250VAC UL
- OPERATING FORCE: 70 ± 20 GRAMS
- OPERATING TEMP: -25°C TO 75°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- PACKAGED IN TRAYS, 119 PIECES PER TRAY.

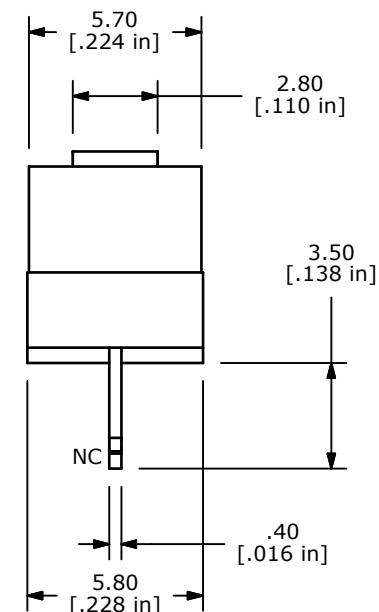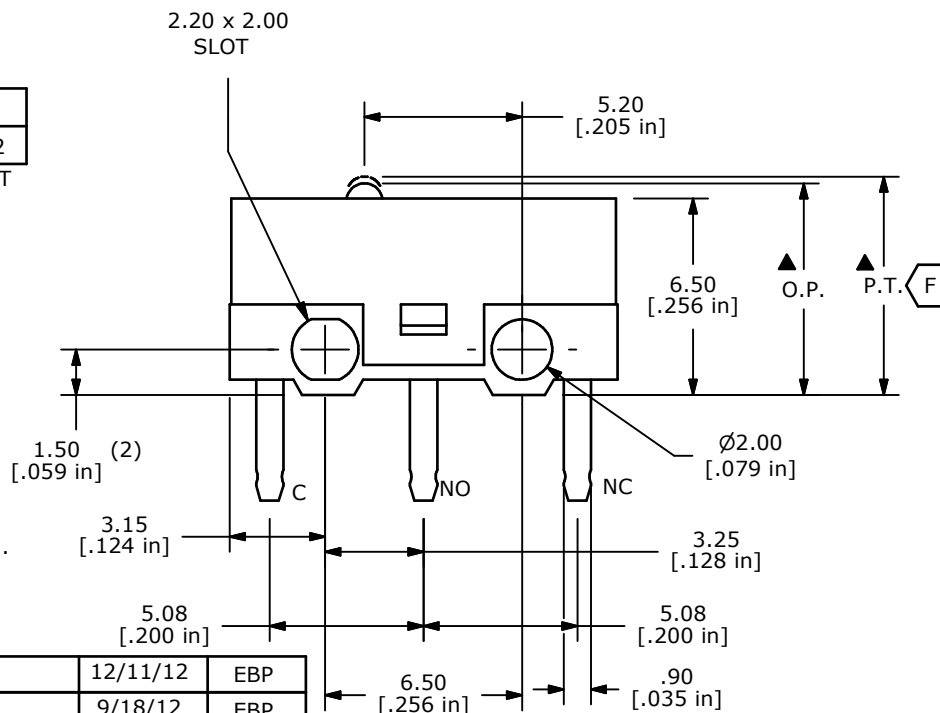

H	20917	119 WAS 200	12/11/12	EBP
G	20762	1.20 WAS 1.70	9/18/12	EBP
F	20740	F.P. 7.35 ± 0.2 WAS P.T. 0.35	9/7/12	EBP
E	20071	CHANGE FORCE TOL. WAS +/- 10 GRAMS	7/25/11	BGL
D	18157	REMOVE CE APPROVED FROM NOTES	6/24/08	BLR
C	18089	ADD NOTE 11	5/9/08	RC
B	18038	ADD O.P., P.T.	3/25/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE SS0750300F070P1A

SCALE

DATE

6/24/2008

DR

BLR

DWG

Q971000

REV

H