

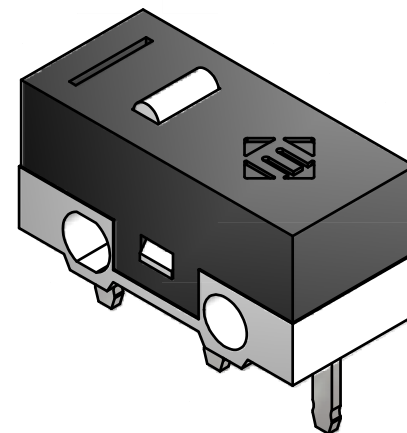


P.C. MOUNTING


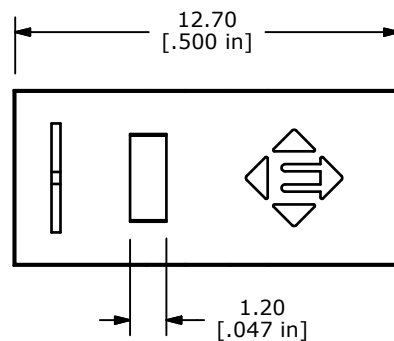


O.P. (MM)	P.T. (MM)
7.00 ± 0.2	0.35

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- ▲ 3. RATING: 0.1 @ 125VAC
4. OPERATING FORCE: 70± 20 GRAMS
- ▲ 5. OPERATING TEMP: -25°C TO 75°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
8. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT
11. PACKAGED IN TRAYS, 200 PIECES PER TRAY.

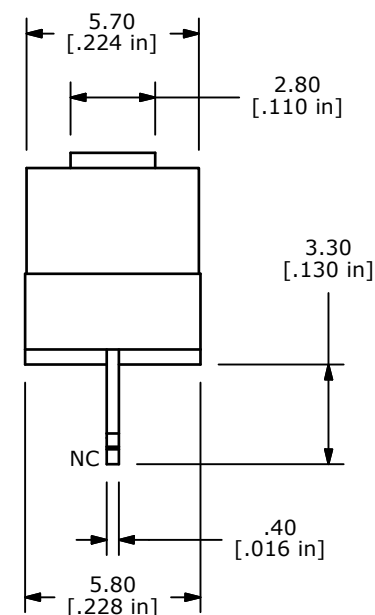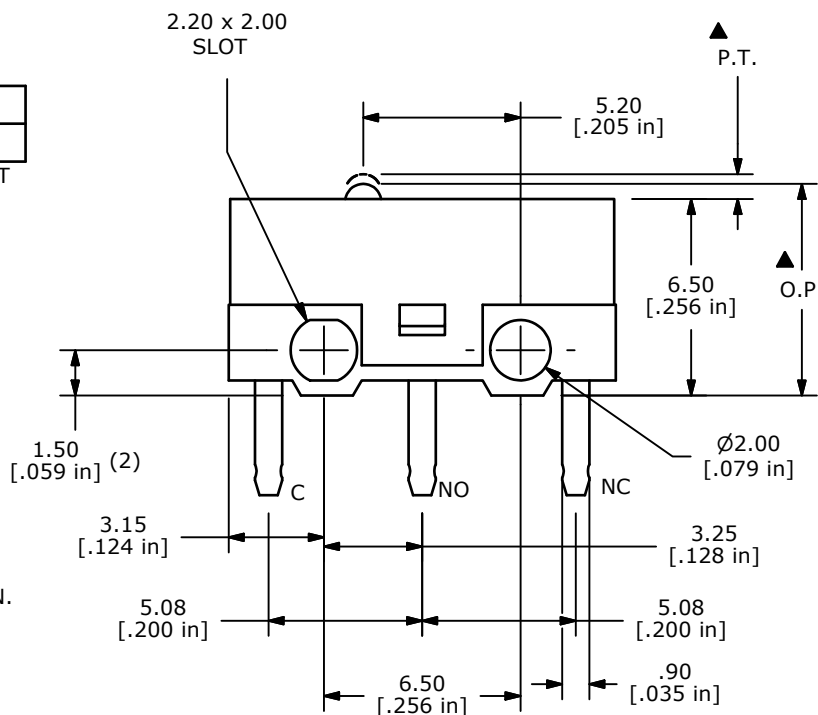

TITLE SS075Q100F070P1A

A	20478	RELEASE FOR PRODUCTION	02/13/12	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 2/13/2012

DR BMA

DWG Q971033

REV A