


ESVG 25

Pressure compensation cable gland, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

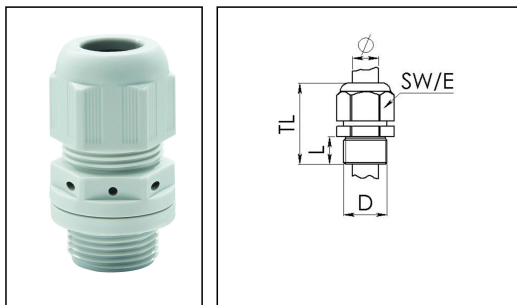

Material cable gland	Polyamide
Material membrane	ePTFE
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Protection class	IP 68, to 0,6 bar, IP 69K
Thread type	M
Connection thread size D	25
Lead	1,5
Length screw-in thread L	10 mm
Cable diameter min	9 mm
Cable diameter max	17 mm
Cable Diameter UL	10,8 mm - 15,8 mm
Key width SW	29 mm
Collar diameter (E)	32 mm
Total length TL	45 mm - 54 mm
Product Color	RAL 7035
Order no. RAL 7035	10100666
Type	ESVG 25
Packing unit	1
ETIM-Classification	EC000441

Recommended accessories

MFD 25/02/060	10060452
RDE 25	10060768
EMUG 25	10060773
MFD 25/02/080	10060952
MFD 25/02/070	10063995
BS 12	10064009
BS 17	10064012
MFD 25/03/070	10064342
MFD 25/04/060	10064343
MFD 25/01/105-01/055	10101255
MFD 25/05/056	10102023

10.11.2014