
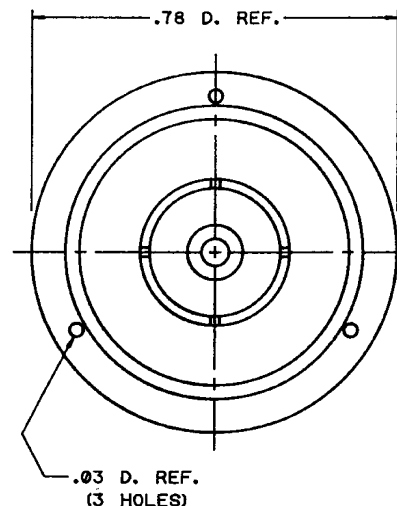


ASH NO.	M CODE	MADE FROM
---------	--------	-----------

GSD

1208-10-5

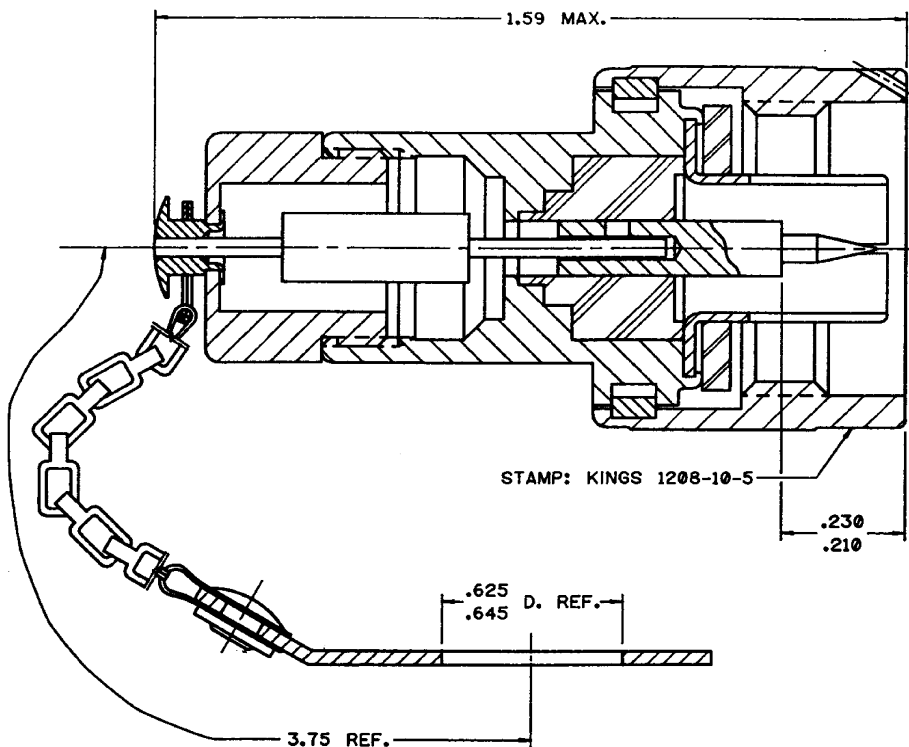

NOTES:

1. MATERIALS:
INSULATOR: TEFLON, L-P-403
GASKET: SILICONE RUBBER, ZZ-R-765
OUTER CONTACT } PHOSPHOR BRONZE,
C-RING } QQ-B-750
SAFETY CHAIN }
RING } STAINLESS STEEL, 303
WASHER }
RIVET }
ALL OTHER METAL PARTS: BRASS, QQ-B-626
2. FINISHES:
SAFETY CHAIN }
RING } PASSIVATED
WASHER }
RIVET }
ALL OTHER METAL PARTS: SILVER PLATE
PER QQ-S-365
3. ELECTRICAL CHARACTERISTICS:
TERMINATING RESISTANCE: 75 OHMS
FREQUENCY RANGE: DC TO 500 MHZ
POWER RATING: 1/2 WATT CW
VSWR: 1.6 MAX.

UNLESS OTHERWISE SPECIFIED:		2. REMOVE ALL BURRS, BREAK ALL SHARP EDGES .005 MAX.
TOLERANCES, FRACTIONS & 2 PLACE DECIMALS ± .010		3. NO FILLETS PERMITTED.
3 PLACE DECIMALS ± .004	ANGLES ± 0°30'	4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
T.I.R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.		5. ALL DIMENSIONS PRIOR TO PLATING
		6. ALL PLATING IN ACCORDANCE WITH KER 10004

REVISIONS

ISSUE	CHANGES
0	ER 28419 EAJ 19 NOV 86
1	CN 38980 E TML 12/15/03

SCALE: 4:1

APPROX. SURFACE AREA

WAS E-13903

USED ON:

REF:
ITT P/N G350524-I REV. C

DISC FA16 FILE FA0147.GSD
NO. NO.

75Ω N TERMINATION (M)
WITH SAFETY CHAIN

DRAWN EAJ DATE 14NOV86

APPR. MJB DATE 18NOV86

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1208-10-5

GSD