

### Features

- PFC, ballast control and half-bridge driver in one IC
- Critical-conduction mode boost-type PFC
- Internal VBUS sensing and regulation
- Internal PFC loop compensation
- Programmable PFC over-current
- Ignition voltage regulation (current or voltage control)
- Half-bridge non-ZVS protection
- Half-bridge over-current protection using low-side MOSFET  $R_{ds(on)}$
- Programmable preheat time
- Programmable preheat frequency
- Programmable ignition ramp time
- Programmable run frequency
- Voltage-controlled oscillator (VCO) analog input
- Latched EOL window comparator on VCC
- Internal EOL fault timer
- Fixed dead-time (1.7µsec typ.)
- DC bus under-voltage reset
- Lamp insert auto-restart
- Micro-power start-up current
- Under-voltage lock-out mode
- Small 8-pin SOIC package
- Lead-free

### Product Summary

|                               |                     |
|-------------------------------|---------------------|
| Topology                      | Boost + Half-Bridge |
| $V_{OFFSET}$                  | 600 V               |
| $V_{OUT}$                     | VCC                 |
| $I_{O+}$ & $I_{O-}$ (typical) | 180 mA & 260 mA     |
| Dead-time                     | 1.7µs               |


### Package Options



### Typical Application

- Electronic Ballast

### Typical Application Block Diagram

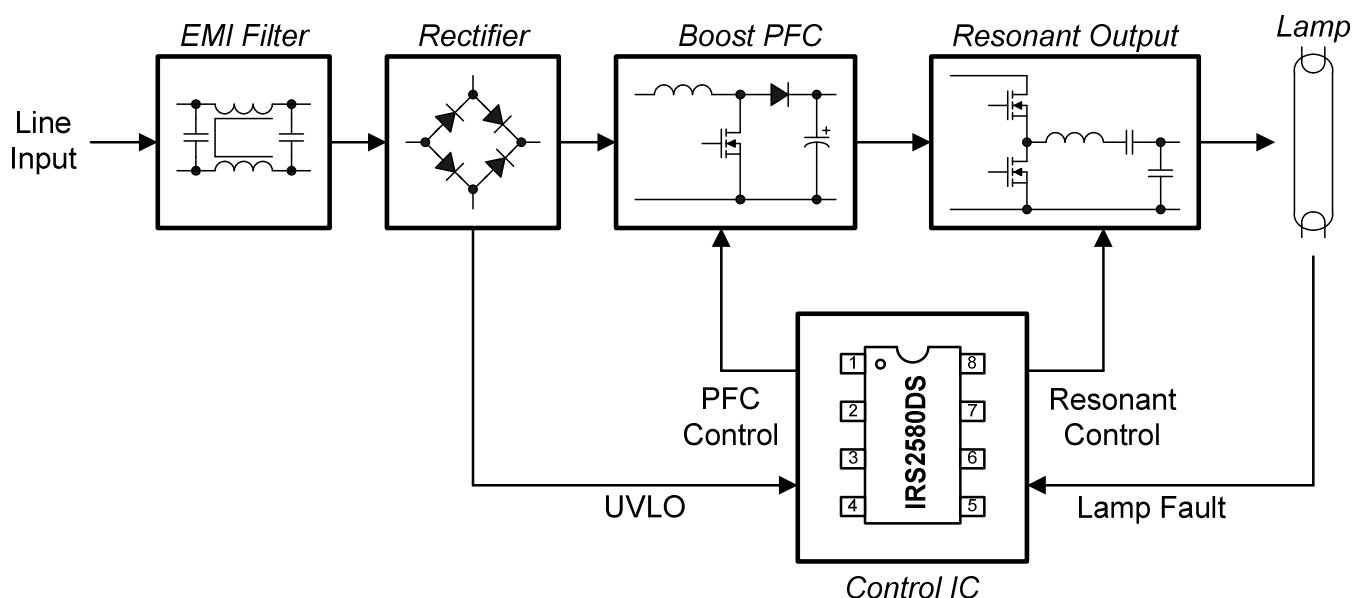

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[International Rectifier:](#)

[IRS2580DSTRPBF](#) [IRS2580DSPBF](#)