

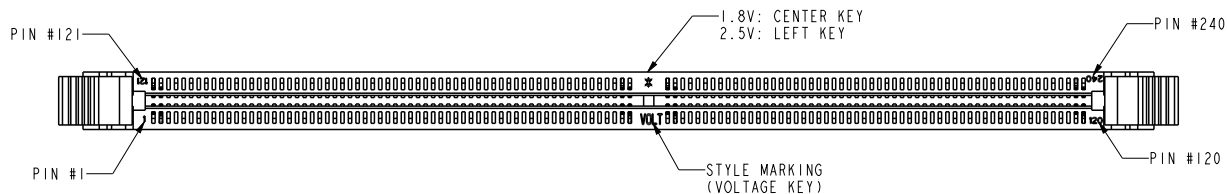

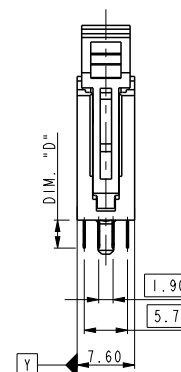
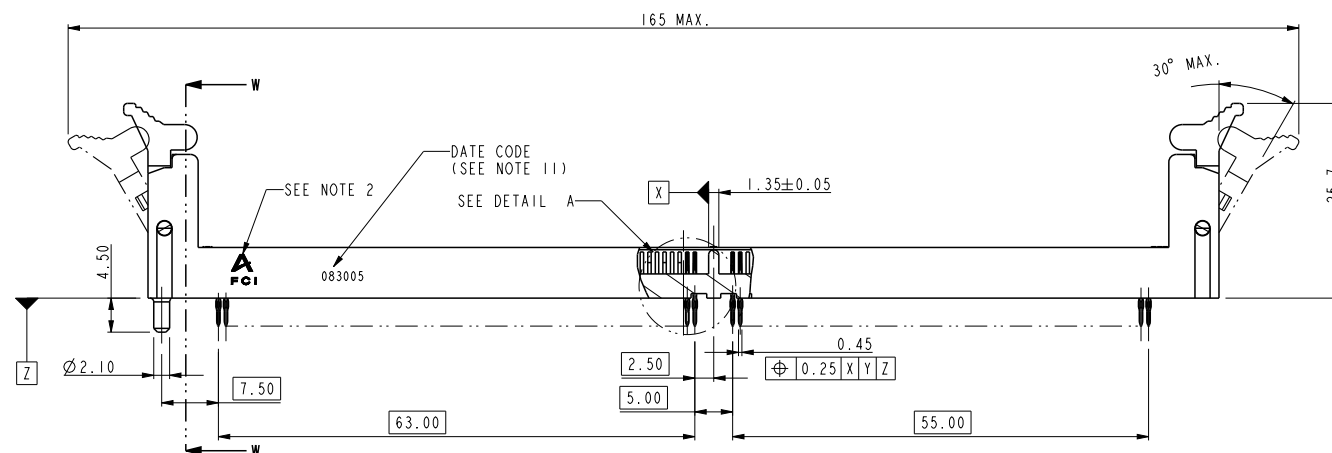
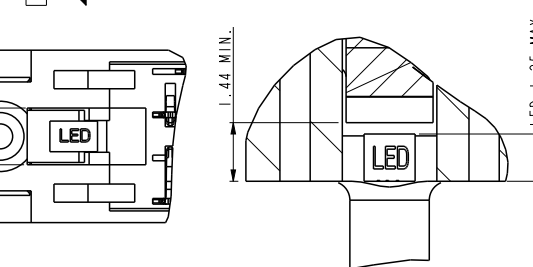


10034542-XXXXXX



rev	ecn no	dr	date
N	DG07-0306	CS	2007-07-27
P	DG07-0416	CS	2007-10-22
R	DG-15684-1	ERIC	2013-11-08

DETAIL A
SCALE 3.000SECTION W-W
SCALE 1.000DETAIL C
SCALE 3.000DETAIL B
SCALE 5.000

spec ref		*		dr		Rick Bian	2010/07/03	projection				MM		size		A4	scale		0.500				
tolerance std		ASME Y14.5		eng		Eric Jiang	2013/11/25	chr		Tian-Xu Huang		2013/11/25	appr		Pei-Ming Zheng		2013/11/25	product family		ecn no		ELX-DG-15684-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED																				rel level		Released	
surface		✓		linear		0.X		±0.38		FCI		title		DDR 11 240P PRESS-FIT		dwg no		10034542		rev		R	
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		*		Product - Customer Drw		sheet 1 of 5					



Print File - REV C - 2009-06-09

PDS: Rev :R

STATUS:Released

Printed: Nov 26, 2013

10034542-XXXXXCXX

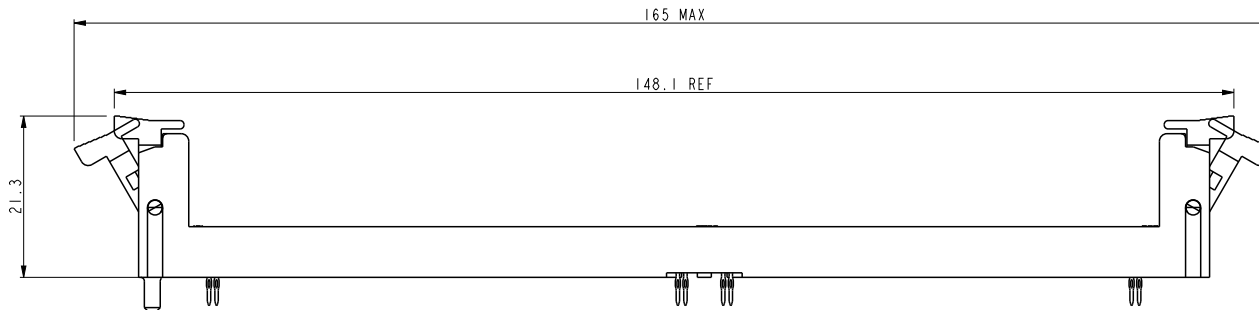

ALL DIMENSIONS ARE SAME TO PAGE 1 EXCEPT MARKED IN THE ABOVE

spec ref		*		dr	Rick Bian	2010/07/03	projection MM	size	A4	scale	0.500		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Eric Jiang	2013/11/25		ecn no				ELX-DG-15684-1	
				chr	Tian-Xu Huang	2013/11/25		rel level				Released	
				appr	Pei-Ming Zheng	2013/11/25		product family					
surface	linear	0.X	±0.38		title				DDR II 240P PRESS-FIT	dwg no	10034542	rev	R
		0.XX	±0.25										
		0.XXX	±0.13										
	ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		*	Product - Customer Drw			sheet 2 of 5	

PrintE File - REV C - 2009-06-09






PDS: Rev :R

STATUS:Released

Printed: Nov 26, 2013




Copyright FCI.

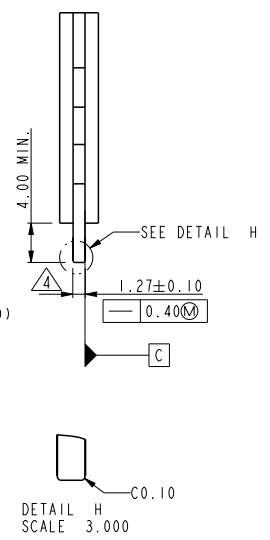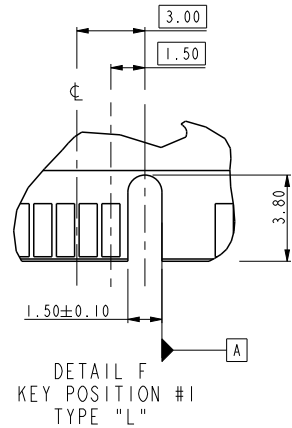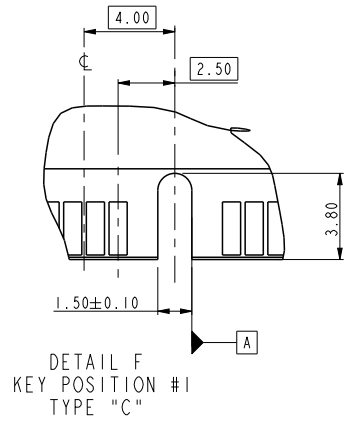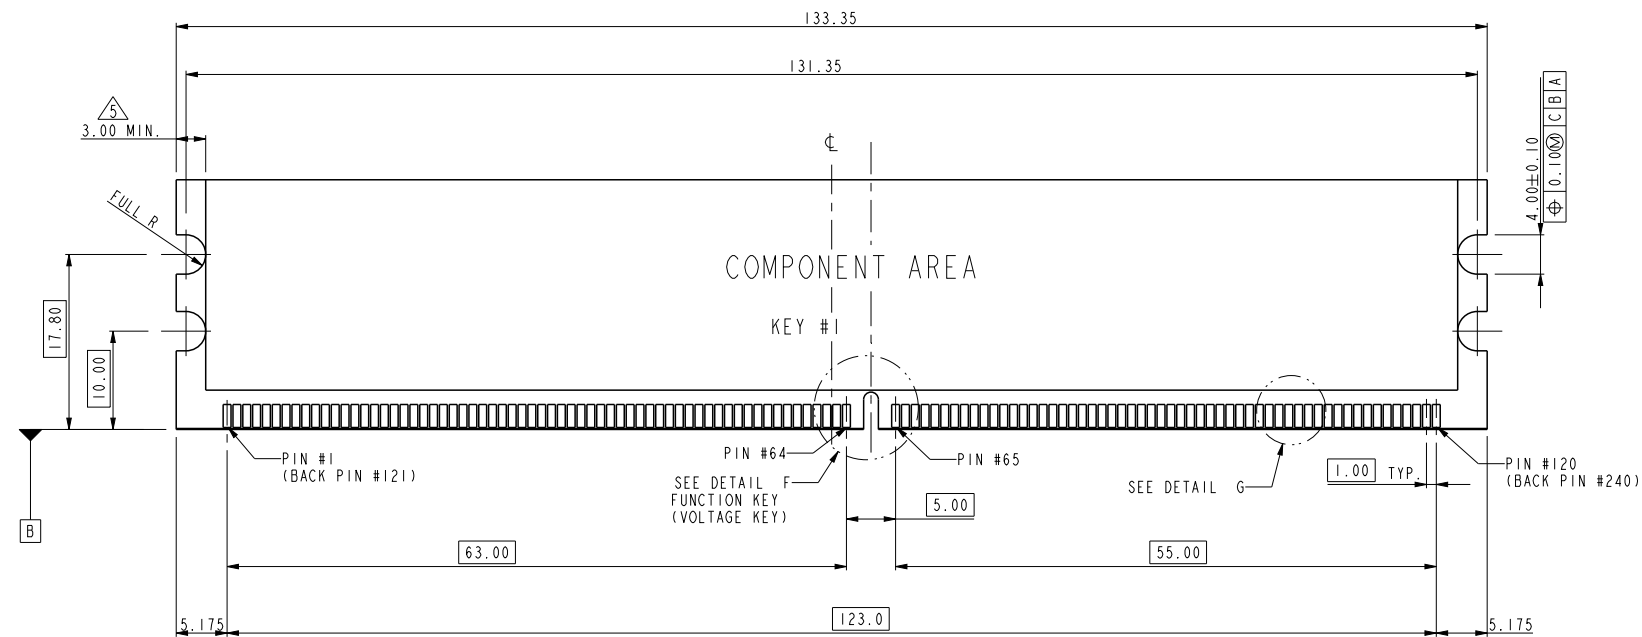

NOTE:
1. MATERIAL : FR-4.
2. FINISH: SOLDER MASK.
3. BURR: 0.08 MAX.



TYPE "L"	2.5 VOLTAGE
TYPE "C"	1.8 VOLTAGE
SUB KEY POS #1	DESCRIPTION


spec ref *				dr Rick Bian 2010/07/03		projection 		MM	size A4	scale 0.500
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Eric Jiang 2013/11/25				ecn no ELX-DG-15684-1		
				chr Tian-Xu Huang 2013/11/25				rel level Released		
				appr Pei-Ming Zheng 2013/11/25						
product family										
surface 	linear	0.X	±0.38		title DDR 11 240P PRESS-FIT -	dwg no	10034542			rev R
		0.XX	±0.25							
		0.XXX	±0.13							
	ASME Y14.5	angular	0°							

PrintE File - REV C - 2009-06-09



title DDR II 240P PRESS-FIT
cat. no.

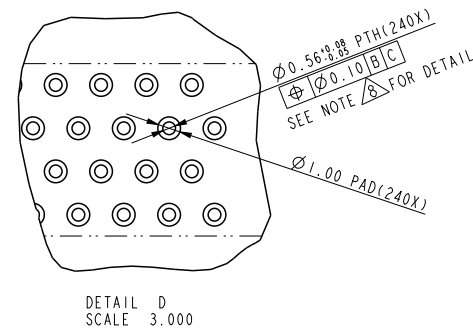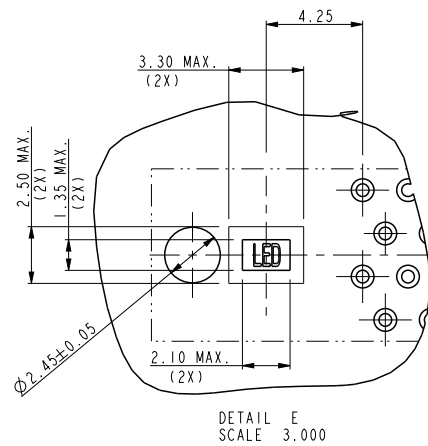

spec ref *				dr Rick Bian 2010/07/03		projection		MM		size A4		scale 0.500			
tolerance std ASME Y14.5 TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Eric Jiang 2013/11/25						ecn no ELX-DG-15684-1					
				chr Tian-Xu Huang 2013/11/25											
				appr Pei-Ming Zheng 2013/11/25						product family		rel level Released			
surface  ASME Y14.5		linear				title DDR 11 240P PRESS-FIT -				dwg no 10034542		rev R			
														0.X ±0.38	
														0.XX ±0.25	
ASME Y14.5		angular		0° ±2°		www.fci.com		cat. no. *		Product - Customer Drw		sheet 4 of 5			



Copyright FCI.

A

B

C

D

10034542-□□□□□□□



STYLE: MECHANICAL KEYING
1 : 1.8 VOLT. W/CENTER KEY #1
2 : 2.5 VOLT. W/LEFT KEY #1

REVISE
0

TAIL LENGTH

CODE	DIM. "D"
0	3.30
1	3.70
2	4.20

NOTE:

1. MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED, COLOR: BLACK.
EJECTOR: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED, COLOR: NATURAL.
TERMINAL: COPPER ALLOY.
2. FCI LOGO TO BE APPROXIMATELY LOCATED AS SHOWN ON PRINT.
3. PRODUCT SPECIFICATION: GS-12-273
4. CARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND / OR METALIZATION.
5. 3.00mm MINIMUM APPLIES TO BOTH 4.00mm WIDE NOTCH LENGTH AND COMPONENT KEEPOUT AREA.
6. LEADING EDGE OF CONTACT PADS SPECIFIED BY THE KEEP OUT ZONE SHALL BE FREE OF BURRS AND EXTERNAL TIE BARS.
FOR OPTIMUM PERFORMANCE, THE TIE BAR IS TO BE ON AN INTERNAL LAYER SO THAT THE REMNANT CANNOT CAUSE CONTACT DAMAGE.
7. PACKAGING SPECIFICATION: GS-14-528.
8. ALL PTH SHOULD BE 0.66mm DIA DRILLED AND 0.025mm MIN. ELECTRO-DEPOSITED COPPER THK ON THROUGH HOLE WALL.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 20 SECONDS IN A IR REFLOW OVEN.

DATE CODE: X X X X X X
YEAR
DATE
MONTH

12. A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION


FOR ROHS OPTION:
BLANK: TIN LEAD
LF: LEAD FREE

FOR LATCH TYPE OPTION:
BLANK: TALL LATCH
C: SHORT LATCH

CODE	CONTACT	TAIL AREA	UNDERPLATE	CODE	CONTACT	TAIL AREA	UNDERPLATE
2	15u"(0.38um) MIN. GOLD	35u"~100u" Tin PLATING	50u"(1.27um) MIN. NICKEL OVERALL	2B	15u"(0.38um) MIN. GOLD	35u"~100u" Tin/Lead PLATING	50u"(1.27um) MIN. NICKEL OVERALL
3	30u"(0.76um) MIN. GOLD			3B	30u"(0.76um) MIN. GOLD		
4	3u"(0.076um) MIN. GOLD			4B	3u"(0.076um) MIN. GOLD		
6	15u"(0.38um) MIN. GOLD (LUBRICATED)	35u"~100u" Tin PLATING	50u"(1.27um) MIN. NICKEL OVERALL	6B	15u"(0.38um) MIN. GOLD (LUBRICATED)	35u"~100u" Tin/Lead PLATING	50u"(1.27um) MIN. NICKEL OVERALL
7	30u"(0.76um) MIN. GOLD (LUBRICATED)			7B	30u"(0.76um) MIN. GOLD (LUBRICATED)		
8	3u"(0.076um) MIN. GOLD (LUBRICATED)			8B	3u"(0.076um) MIN. GOLD (LUBRICATED)		

COLOR OF HOUSING AN EJECTOR

- 0 : BLACK HOUSING + IVORY EJECTOR
1 : BLACK HOUSING + AMBER EJECTOR
2 : BLACK HOUSING + BLACK EJECTOR
3 : BLUE HOUSING + IVORY EJECTOR
4 : BLUE HOUSING + AMBER EJECTOR

dr	Rick Bian	2010/07/03	projection 	MM 	size	A4	scale	0.500			
eng	Eric Jiang	2013/11/25			ecn no			ELX-DG-15684-1			
chr	Tian-Xu Huang	2013/11/25			rel level			Released			
appr	Pei-Ming Zheng	2013/11/25	product family								
		title			DDR II 240P PRESS-FIT		dwg no		10034542	rev	R
www.fci.com		cat. no.		*	Product - Customer Drw				sheet 5 of 5		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[10034542-10002](#) [10034542-10013](#) [10034542-10013B](#) [10034542-10017](#) [10034542-10006LF](#) [10034542-10112LF](#)
[10034542-10203LF](#)