



Chip Inductors – 1008CS Series (2520)

These chip inductors are designed for the needs of today's high frequency designer. Their ceramic construction delivers the highest possible SRFs and Q values. The non-magnetic coilform also ensures the utmost in thermal stability, predictability and batch consistency.

These parts can be ordered with terminations that make them compliant with RoHS standards.

Coilcraft **Designer's Kit C100** contains samples of all 5% inductance tolerance parts. Kits with 2% tolerance parts are also available.

Part number ¹	Inductance ² (nH)	Percent tolerance ³	Q min ⁴	SRF min ⁵ (MHz)	DCR max ⁶ (Ohms)	Irms ⁷ (mA)
1008CS-100X_B	10 @ 50 MHz	20,10, 5,2	50 @ 500 MHz	4100	0.08	1000
1008CS-120X_B	12 @ 50 MHz	20,10, 5,2	50 @ 500 MHz	3300	0.09	1000
1008CS-150X_B	15 @ 50 MHz	20,10, 5,2	50 @ 500 MHz	2500	0.10	1000
1008CS-180X_B	18 @ 50 MHz	20,10, 5,2	50 @ 350 MHz	2500	0.11	1000
1008CS-220X_B	22 @ 50 MHz	20,10, 5,2,1	55 @ 350 MHz	2400	0.12	1000
1008CS-270X_B	27 @ 50 MHz	20,10, 5,2	55 @ 350 MHz	1600	0.13	1000
1008CS-330X_B	33 @ 50 MHz	20,10, 5,2	60 @ 350 MHz	1600	0.14	1000
1008CS-390X_B	39 @ 50 MHz	20,10, 5,2	60 @ 350 MHz	1500	0.15	1000
1008CS-470X_B	47 @ 50 MHz	20,10, 5,2,1	65 @ 350 MHz	1500	0.16	1000
1008CS-560X_B	56 @ 50 MHz	10, 5,2,1	65 @ 350 MHz	1300	0.18	1000
1008CS-680X_B	68 @ 50 MHz	10, 5,2,1	65 @ 350 MHz	1300	0.20	1000
1008CS-820X_B	82 @ 50 MHz	10, 5,2,1	60 @ 350 MHz	1000	0.22	1000
1008CS-101X_B	100 @ 25 MHz	10, 5,2,1	60 @ 350 MHz	1000	0.56	650
1008CS-121X_B	120 @ 25 MHz	10, 5,2,1	60 @ 350 MHz	950	0.63	650
1008CS-151X_B	150 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	850	0.70	580
1008CS-181X_B	180 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	750	0.77	620
1008CS-221X_B	220 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	700	0.84	500
1008CS-271X_B	270 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	600	0.91	500
1008CS-331X_B	330 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	570	1.05	450
1008CS-391X_B	390 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	500	1.12	470
1008CS-471X_B	470 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	450	1.19	470
1008CS-561X_B	560 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	415	1.33	400
1008CS-621X_B	620 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	375	1.40	300
1008CS-681X_B	680 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	375	1.47	400
1008CS-751X_B	750 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	360	1.54	360
1008CS-821X_B	820 @ 25 MHz	10, 5,2,1	45 @ 100 MHz	350	1.61	400
1008CS-911X_B	910 @ 25 MHz	10, 5,2,1	35 @ 50 MHz	320	1.68	380
1008CS-102X_B	1000 @ 25 MHz	10, 5,2,1	35 @ 50 MHz	290	1.75	370
1008CS-122X_B	1200 @ 7.9 MHz	10, 5,2	35 @ 50 MHz	250	2.0	310
1008CS-152X_B	1500 @ 7.9 MHz	10, 5,2	28 @ 50 MHz	200	2.3	330
1008CS-182X_B	1800 @ 7.9 MHz	10, 5,2	28 @ 50 MHz	160	2.6	300
1008CS-222X_B	2200 @ 7.9 MHz	10, 5,2	28 @ 50 MHz	160	2.8	280
1008CS-272X_B	2700 @ 7.9 MHz	10, 5,2	22 @ 25 MHz	140	3.2	290
1008CS-332X_B	3300 @ 7.9 MHz	10, 5,2	22 @ 25 MHz	110	3.4	290
1008CS-392X_B	3900 @ 7.9 MHz	10, 5,2	20 @ 25 MHz	100	3.6	260
1008CS-472X_B	4700 @ 7.9 MHz	10, 5,2	20 @ 25 MHz	90	4.0	260
1008CS-562X_B	5600 @ 7.9 MHz	10, 5	16 @ 7.9 MHz	20	4.0	240
1008CS-682X_B	6800 @ 7.9 MHz	10, 5	18 @ 7.9 MHz	40	4.9	200
1008CS-822X_B	8200 @ 7.9 MHz	10, 5	18 @ 7.9 MHz	25	6.0	170

1. When ordering, specify **tolerance**, **termination** and **packaging** codes:

1008CS-822X J B C

Tolerance: F = 1% G = 2% J = 5% K = 10% M = 20%
(Table shows stock tolerances in bold.)

Termination: B = Standard Ag/Pd/Pt L = RoHS compliant Ag/Pd/Pt

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 per full reel).

B = Less than full reel. In tape, but not machine-ready.
To have a leader and trailer added (\$25 charge),
use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic
tape. Factory order only, not stocked (7500 per full
reel).

2. Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.

5. SRF measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture.

6. DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF840 test fixture.

7. Average current for a 15°C rise above 25°C ambient.

8. Operating temperature range -40°C to +125°C.

9. Electrical specifications at 25°C.

See Qualification Standards section for environmental and test data.

See Color Coding Section for part marking data.

Coilcraft®

Specifications subject to change without notice. Document 101-1 Revised 03/16/04


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com





1008CS Series (2520)

Typical Q vs Frequency

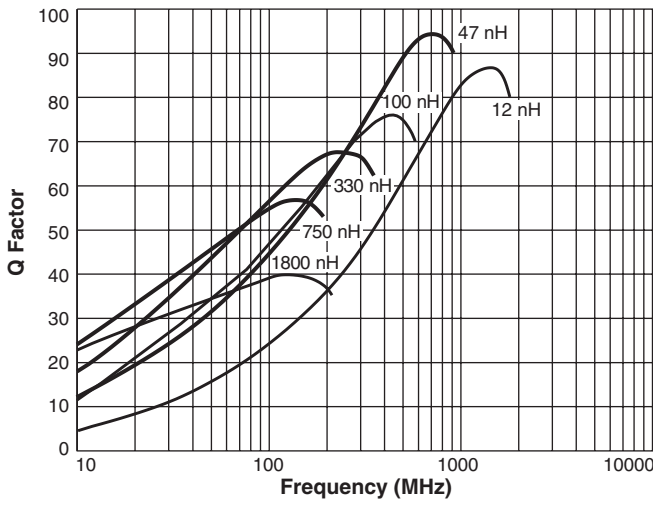

Typical L vs Frequency

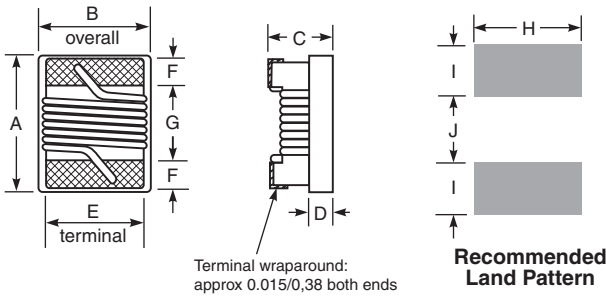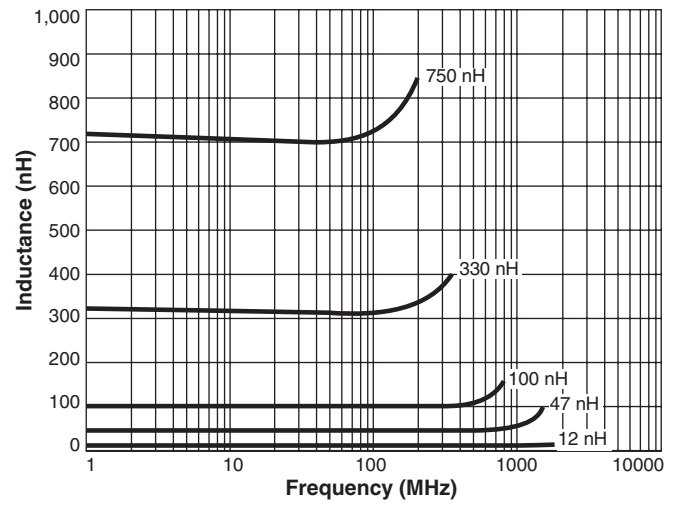

A max	B max	C max	D ref	E	F	G	H	I	J
0.115	0.110	0.080	0.020	0.080	0.020	0.060	0.100	0.040	0.050
2,92	2,79	2,03	0,51	2,03	0,51	1,52	2,54	1,02	1,27

Weight: 29.6 – 37.4 mg

Tape and reel: 2000/7" reel; 7500/13" reel 8 mm tape width

For packaging data see Tape and Reel Specifications section.

Coilcraft[®]

Specifications subject to change without notice. Document 101-2 Revised 11/13/03

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>