




Mating face




B-coding
Mating face
acc. to IEC 61076-2-101



Applications / Advantages

- B-coding for field bus systems e.g. Profibus, DeviceNet or CANopen
- Available with crimp resp. HARAX® rapid termination, or as overmoulded system cable in various lengths
- Shielding by the hood
- Easy handling, quick assembly

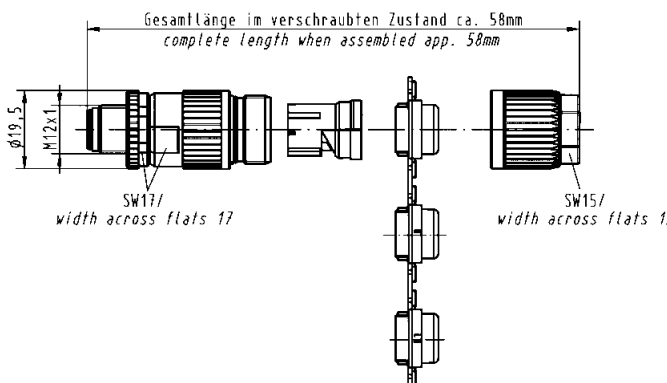Identification	Part number	Drawing	Dimensions in mm
HARAX® M12-L, shielded  Male 2 poles, B-coding 0.25 - 0.34 mm² / AWG 24 - 22	21 03 241 1301	 Gesamtlänge im verschraubten Zustand ca. 58mm complete length when assembled app. 58mm SW17/ width across flats 17 SW15/ width across flats 15	