



Feedthru 0805/1206 Capacitors



W2F/W3F Series

GENERAL DESCRIPTION

Available in both a standard 0805 and 1206 size, AVX's line of feedthru capacitors are ideal choices for EMI suppression, broadband I/O filtering, or Vcc power line conditioning. The unique construction of a feedthru capacitor provides low parallel inductance and offers excellent decoupling capability for all high di/dt environments and provides significant noise reduction in digital circuits to <5 GHz. A large range of capacitor values are available in either NP0 or X7R ceramic dielectrics. AVX FeedThru filters are AEC Q200 qualified. High reliability screening options are available for spacecraft designs.

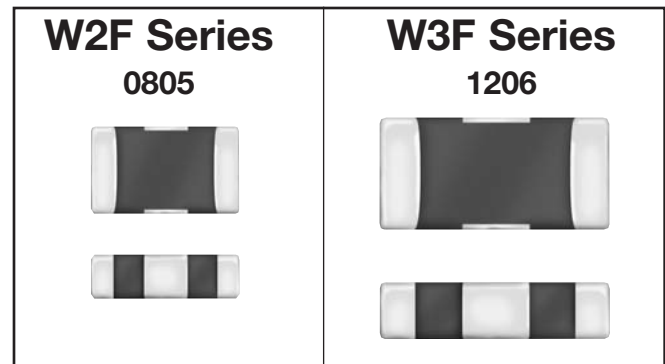

CAPACITOR VALUES

Part Number	Size	Voltage	Dielectric	Capacitance
W2F11A 220 8ATxx	0805	100V	NP0	22pF
W2F11A 470 8ATxx	0805	100V	NP0	47pF
W2F11A 101 8ATxx	0805	100V	NP0	100pF
W2F11A 221 8ATxx	0805	100V	NP0	220pF
W2F11A 471 8ATxx	0805	100V	NP0	470pF
W2F15C 102 8ATxx	0805	50V	X7R	1000pF
W2F15C 222 8ATxx	0805	50V	X7R	2200pF
W2F15C 472 8ATxx	0805	50V	X7R	4700pF
W2F15C 103 8ATxx	0805	50V	X7R	10000pF
W2F15C 223 8ATxx	0805	50V	X7R	22000pF
W2F15C 473 8ATxx	0805	50V	X7R	47000pF
W3F11A 220 8ATxx	1206	100V	NP0	22pF
W3F11A 470 8ATxx	1206	100V	NP0	47pF
W3F11A 101 8ATxx	1206	100V	NP0	100pF
W3F11A 221 8ATxx	1206	100V	NP0	220pF
W3F11A 471 8ATxx	1206	100V	NP0	470pF
W3F15C 102 8ATxx	1206	50V	X7R	1000pF
W3F15C 222 8ATxx	1206	50V	X7R	2200pF
W3F15C 472 8ATxx	1206	50V	X7R	4700pF
W3F15C 103 8ATxx	1206	50V	X7R	10000pF
W3F15C 223 8ATxx*	1206	50V	X7R	22000pF
W3F15C 473 8ATxx	1206	50V	X7R	47000pF

PERFORMANCE CHARACTERISTICS

	NP0	X7R
	+50%, -20%	+50%, -20%
Capacitance Tolerance		
Voltage Rating	100V	50V
Current Rating	300mA	300mA
Insulation Resistance	1000MΩ	1000MΩ
DC Resistance	<0.6Ω	<0.6Ω
Operating Temperature Range	-55 to +125°C	



HOW TO ORDER

W	3	F	1	5	C	223	8	A	T	3	A
Style	Size	Feedthru	Number of Elements	Voltage**	Dielectric	Capacitance Code	Capacitance Tolerance	Failure Rate	Termination	Packaging Code (Reel Size)	Quantity Code (Pcs./Reel)
W = Plated Ni & Sn L = Plated SnPb	2 = 0805 3 = 1206			1 = 100V 5 = 50V	A = NP0 C = X7R		8 = +50/-20%	A = Not Applicable 4 = AUTOMOTIVE	T = Plated Ni & Sn B = Plated SnPb	1 & 2 = 7" Reel Embossed Tape 3 & 4 = 13" Reel Embossed Tape	F = 1,000 A = 2,000, 4,000 or 10,000


*AECQ-200 Qualified. Contact factory for other values.

**Note: NP0 available in 100V only and X7R available in 50V only.

Feedthru 0805/1206 Capacitors




W2F/W3F Series

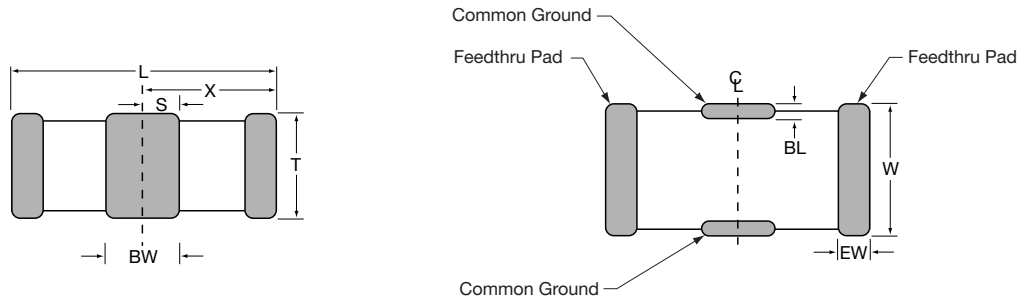

DIMENSIONS

	L	W	T	BW	BL	EW	X	S
0805 MM (in.)	2.01 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	1.14 Max. (0.045 Max.)	0.46 ± 0.10 (0.018 ± 0.004)	0.18 + 0.25 - 0.08 (0.007 + 0.010 - 0.003)	0.25 ± 0.13 (0.010 ± 0.005)	1.02 ± 0.10 (0.040 ± 0.004)	0.23 ± 0.15 (0.009 ± 0.006)
1206 MM (in.)	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.27 Max. (0.050 Max.)	0.89 ± 0.10 (0.035 ± 0.004)	0.18 + 0.25 - 0.08 (0.007 + 0.010 - 0.003)	0.38 ± 0.18 (0.015 ± 0.007)	1.60 ± 0.10 (0.063 ± 0.004)	0.46 ± 0.15 (0.018 ± 0.006)

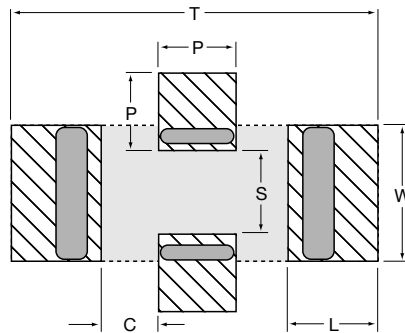


RECOMMENDED SOLDER PAD LAYOUT (TYPICAL DIMENSIONS)

	T	P	S	W	L	C
0805 MM (in.)	3.45 (0.136)	0.51 (0.020)	0.76 (0.030)	1.27 (0.050)	1.02 (0.040)	0.46 (0.018)
1206 MM (in.)	4.54 (0.179)	0.94 (0.037)	1.02 (0.040)	1.65 (0.065)	1.09 (0.043)	0.71 (0.028)


TYPICAL FEEDTHRU CHIP CAP CONNECTION

Feedthru Chip Component Model

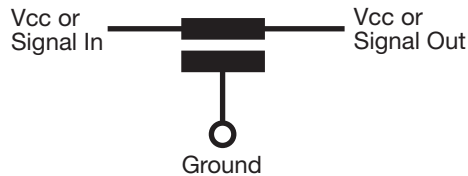


The terminals are connected internally side to side. Left side and right side are connected and front and back are connected internally. For Decoupling, the chip is usually surrounded by four vias, two for Vcc and two for GND. For Signal Filtering, the in and out lines need to be separated on the circuit board.

Physical Layout - A

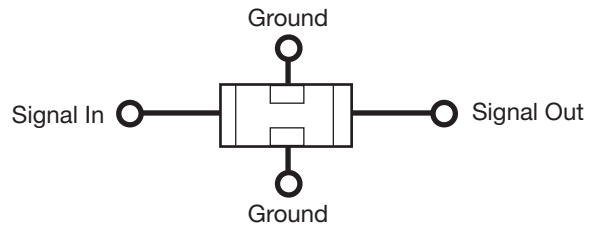

Physical Layout - B

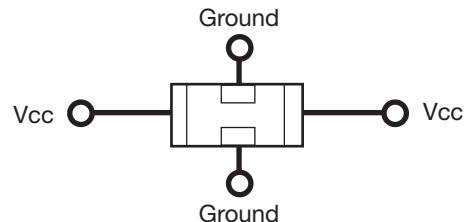


Feedthru 0805/1206 Capacitors




W2F/W3F Series

PERFORMANCE CHARACTERISTICS


S21 0805 – 100V

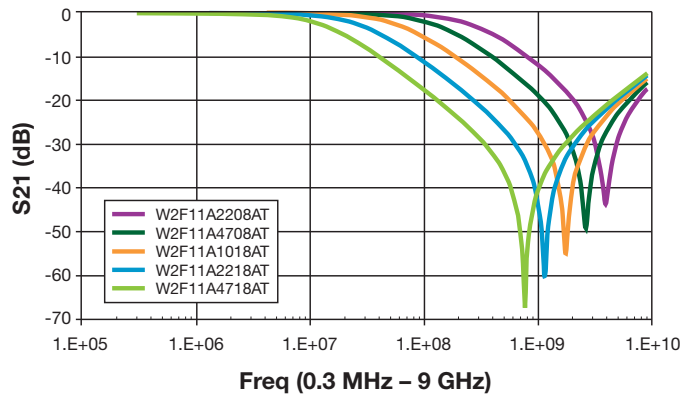


IMPEDANCE 0805 – 100V

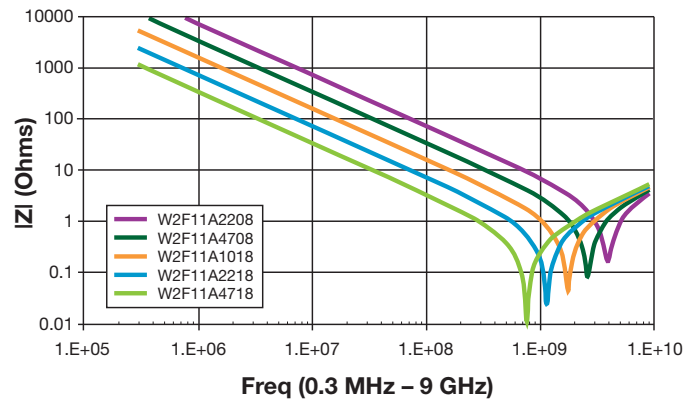


S21 1206 – 100V

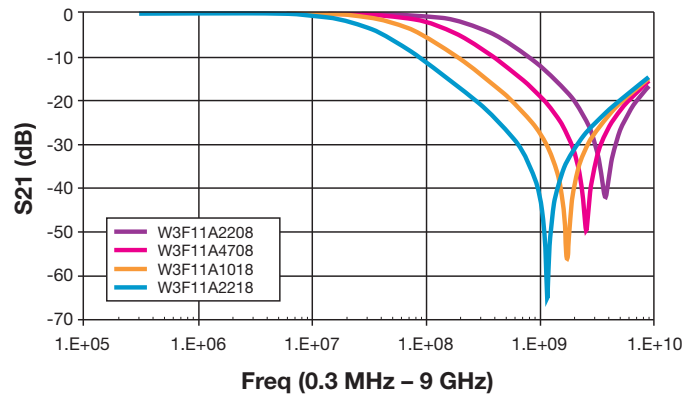


IMPEDANCE 1206 – 100V

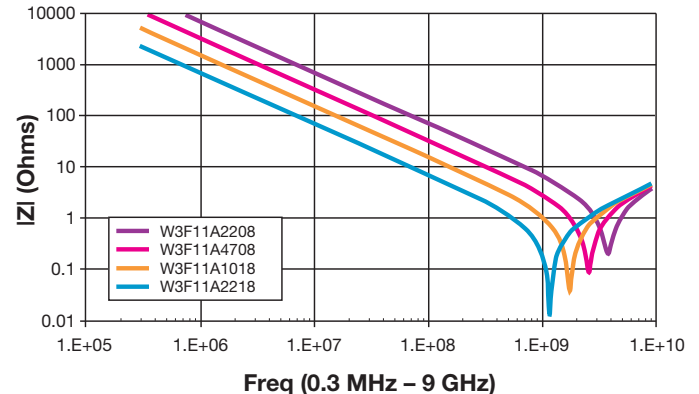

S21 1206 – 50V

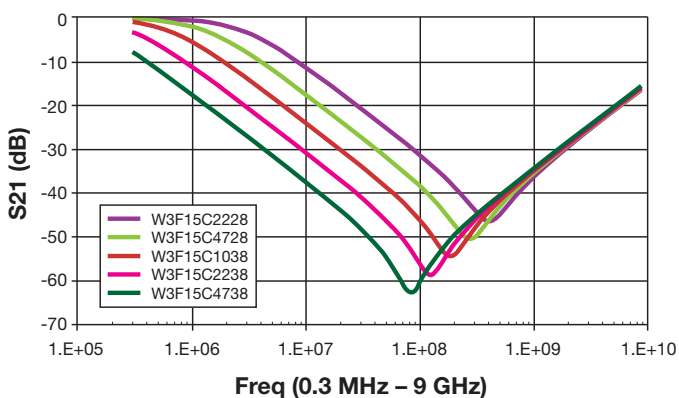

IMPEDANCE 1206 – 50V

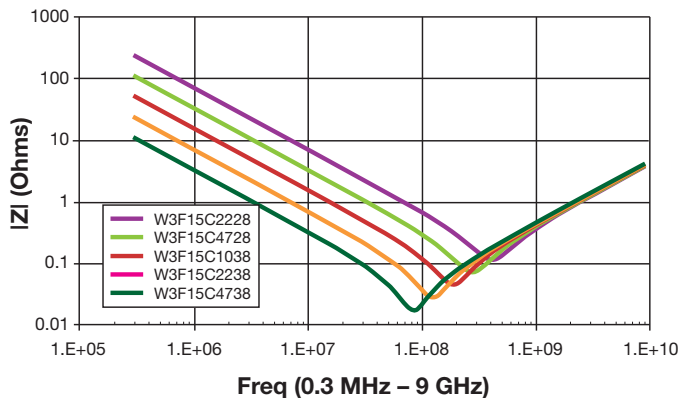


Feedthru 0805/1206 Capacitors




W2F/W3F Series

PERFORMANCE CHARACTERISTICS


0805 NP0
Current vs. Temperature

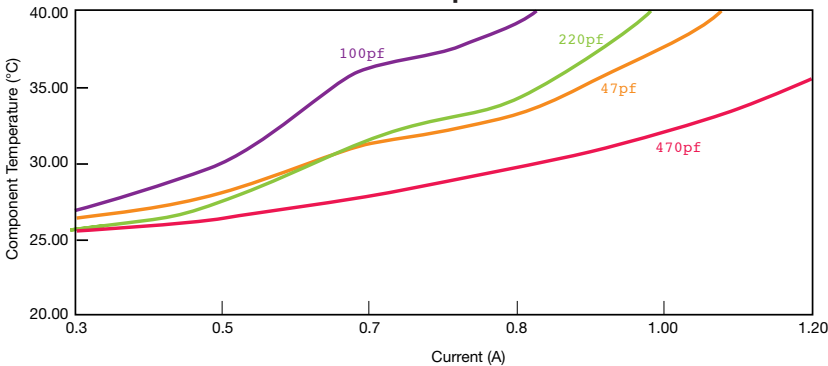


0805 X7R
Current vs. Temperature

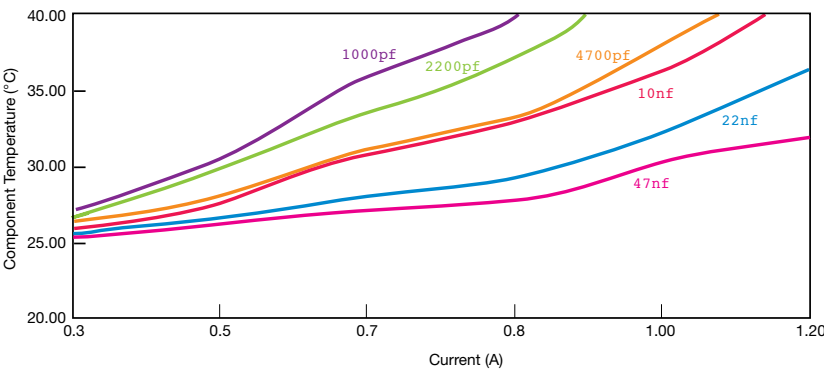

1206 NP0
Current vs. Temperature

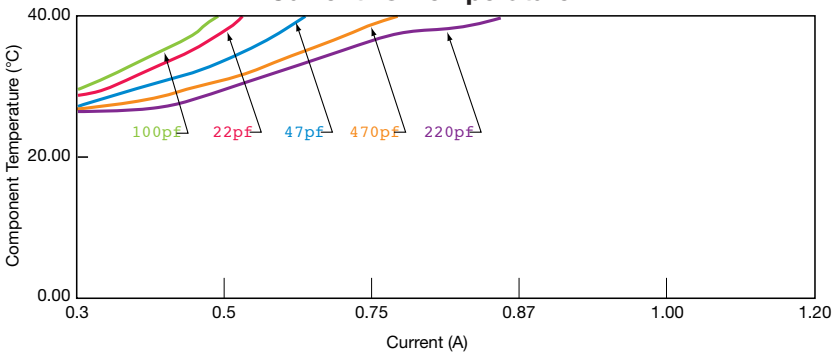

1206 X7R
Current vs. Temperature

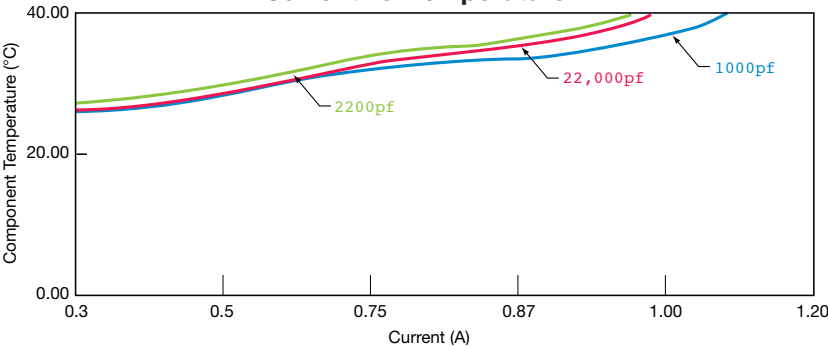

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

W3F41A4708AT1F	W3F11A1018AT1A	W2F11A1018AT1F	W3F11A1018AT1F	W3F15C4728AT1F
W3F15C1028AT1A	W3F15C2228AT1A	W2F15C4728AT1F	W2F15C2228AT1A	W2F15C1028AT1F
W2F15C4728AT1A	W2F15C2228AT1F	W3F15C2228AT1F	W2F15C1028AT1A	W3F15C1028AT1F
W3F41A1018AT1F	W3F45C2218AT1F	W3F41A2208AT1F	W3F45C4718AT1F	W3F15C4738AT1A
W3F15C1028AT3A	W3F15C4728AT1A	W3F15C1038AT1A	W3F11A4708AT1A	W2F11A4708AT1A
W3F11A2208AT1F	W3F11A4708AT1F	W2F11A2208AT1F	W3F11A2208AT1A	W2F11A2208AT1A
W2F11A4708AT1F	W3F15C1038AT1F	W2F15C1038AT1F	W2F15C1038AT1A	W3F15C4738AT1F
W2F15C4738AT1F	W2F15C4738AT1A	W3F15C2238AT1F	W2F15C2238AT1F	W3F15C2238AT1A
W2F15C2238AT1A	W2F11A2218AT1A	W3F11A4718AT1A	W3F11A2218AT1F	W3F11A2218AT1A
W2F11A2218AT1F	W3F11A4718AT1F	W2F11A4718AT1F	W2F11A4718AT1A	W2F43A2208AT1F
W2F43A4708AT1F	W2F43A1018AT1F	W2F11A1018AT1A	W2F11A1018AT3A	W2F11A4718AT3A
W2F15C1038AT1B	W2F43A2208AT1A	W2F43A4708AT1A	W3F11A1018AT3A	W3F11A2208AT3A
W3F11A2218AT3A	W3F11A4708AT3A	W3F11A4718AT3A	W3F15C2228AT3A	W3F41A1018AT1A
W3F41A2208AT1A	W3F41A4708AT1A	W3F45C2218AT1A	W3F45C4718AT1A	W2F15C4738AT3A
W2F15C4728AT1B	W2F11A1008AT1A	W3F15C2238AT3A	W2F11A2218AT3A	W2F15C4728AT3A
W2F43A1018AT1A	W2F15C4738AT1A			