

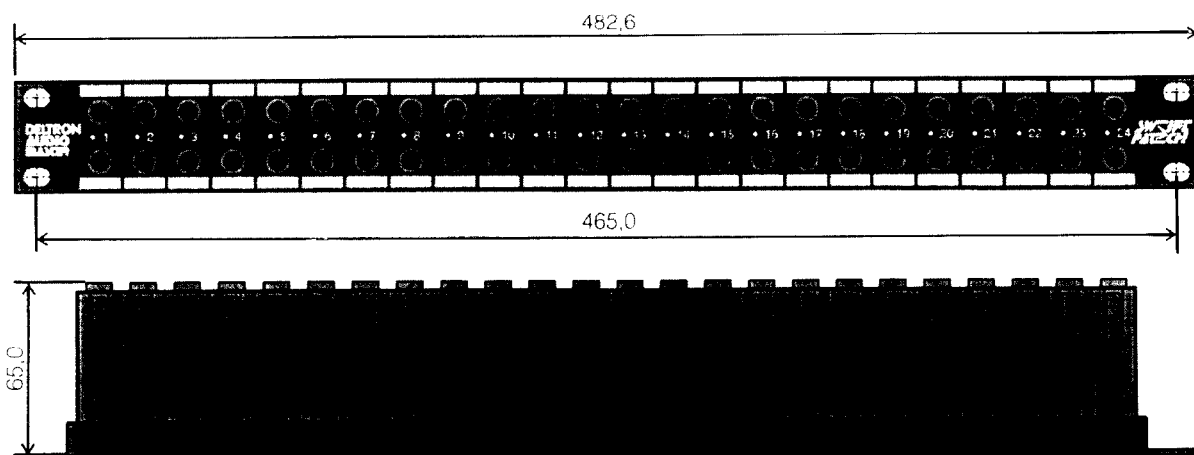


SWIFT PATCH

DIMENSIONS IN MILLIMETERS


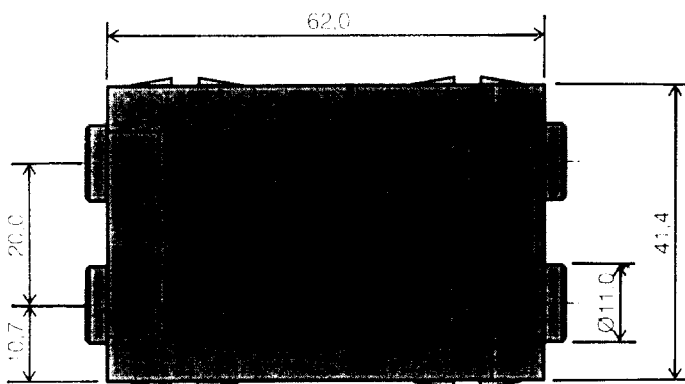


TYPICAL PATCHBAY ASSEMBLY

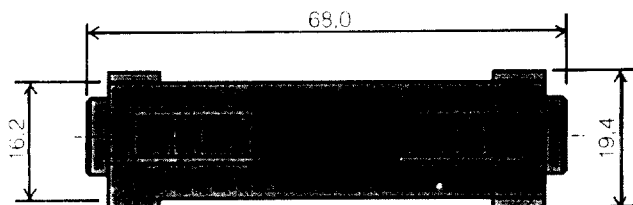

NORMALISED INDICATOR

SCRIBBLE STRIP

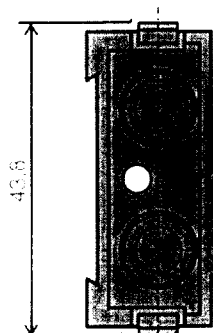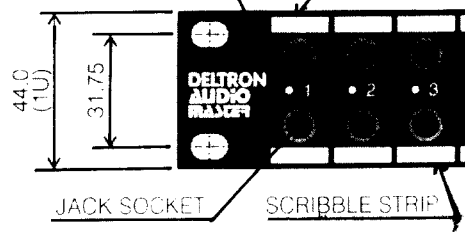

**PATCHBAY
MODULE**

MATERIAL

Modules: Noryl (Nylon 66)
Contacts: Nickel Silver
Panel: Aluminium 2mm thick

ELECTRICAL

Current Rating: 4 Amps
Operating Voltage: 250 Vac
Contact Resistance: $\leq 3\text{m}\Omega$
Temp. Range: -10°C to $+90^{\circ}\text{C}$

Tel: +44 (0) 181 965 4222
Fax: +44 (0) 181 965 6130
Web: www.deltron-components.co.uk
E-mail: sales@deltron-components.co.uk

Atlas Works, Atlas Road, London NW10 6DN

DELTRON
COMPONENTS LTD



A member of the DELTRON ELECTRONICS GROUP