

FEMALE END VIEW	
3 4 8 00 9 2 0 0 5 1 7 6	
inini fast,	

SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON				
MOLDED HEAD MATERIAL/COLOR	NYLON/BLACK				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	7.0 A				
RATED VOLTAGE [V]	600 V				
CABLE RANGE	9.0mm to 16.0mm				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS IEC IP67				
MAX. CONDUCTOR SIZE	14 AWG				



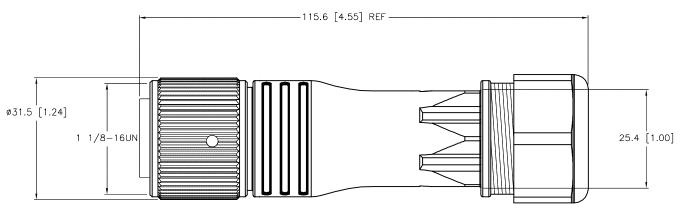

## SOURCE DRAWING - FOR REFERENCE ONLY

			_		,	
	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	PRCK Inc. MINN 1-1-2 Controls (Controls Controls Control Co	(763) 553_7300	
	SEE SPECIFICATIONS	DISPLAYED ON THIS DRAWING ARE FOR	DRFT   RWC   DATE   11/19/0   APVD   SCALE   1 = 1.0	B /191-0/21 9		
	FINISH	REFERENCE ONLY CONTACT TURCK	MILLIMETER [ INCH ]	IDENTIFICATION NO.  U2-14986	REV B	
B ADD MAX. CONDUCTOR SIZE RDS 04/15/15 495	13 SEE SPECIFICATIONS	FOR MORE INFORMATION		02 7 7000		
EV DESCRIPTION BY DATE ECO	10.		DO NOT SCALE THIS DRAWING	FILE: U2-14986	SHEET 1 OF 1	