

4




3

2

1

THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
M2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

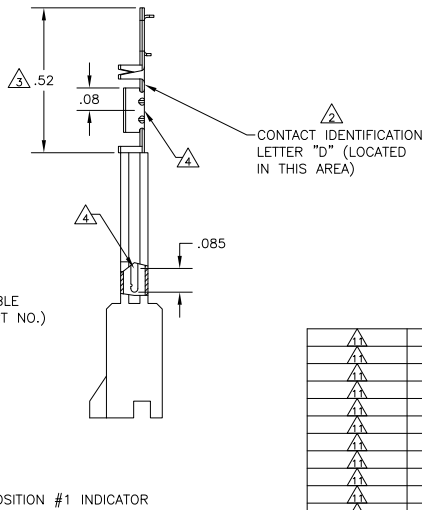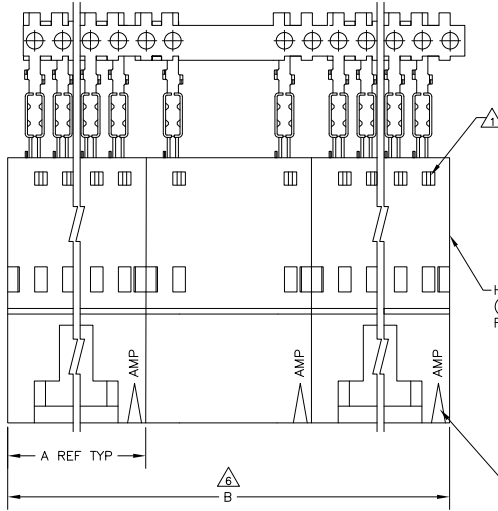

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103660
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 10 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 11 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12 SUPERSEDED BY 5-103945-8

OBSOLETE
OBSOLETE

PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY POSN NUMBER ON STRIP
2	2.59	1.295	1-103653-1	12	6-103945-1	
2	2.39	1.195	1-103653-0	11	6-103945-0	
2	2.19	1.095	103653-9	10	5-103945-9	
2	1.99	.995	103653-8	9	5-103945-8	
2	1.79	.895	103653-7	8	5-103945-7	
3	2.39	.795	103653-6	7	5-103945-6	
2	1.39	.695	103653-5	6	5-103945-5	
4	2.38	.595	103653-4	5	5-103945-4	
4	1.98	.495	103653-3	4	5-103945-3	
5	1.98	.395	103653-2	3	5-103945-2	
8	2.36	.295	103653-1	2	5-103945-1	
4	1.98	.495	103653-3	4	1-103945-7	
5	1.98	.395	103653-2	3	1-103945-6	
2	2.19	1.095	103653-9	10	1-103945-5	
2	1.39	.695	103653-5	6	1-103945-4	
4	2.38	.595	103653-4	5	1-103945-3	
8	2.36	.295	103653-1	2	1-103945-2	
2	2.59	1.295	1-103653-1	12	1-103945-1	
2	2.39	1.195	1-103653-0	11	1-103945-0	
2	2.19	1.095	103653-9	10	103945-9	
2	1.99	.995	103653-8	9	103945-8	
2	1.79	.895	103653-7	8	103945-7	
3	2.39	.795	103653-6	7	103945-6	
2	1.39	.695	103653-5	6	103945-5	
4	2.38	.595	103653-4	5	103945-4	
4	1.98	.495	103653-3	4	103945-3	
5	1.98	.395	103653-2	3	103945-2	
8	2.36	.295	103653-1	2	103945-1	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR R. BROWN	26XJUL00	TE Connectivity	
DIMENSIONS: INCHES		DR K. WRIGHT	26XJUL00	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR K. WRIGHT	26XJUL00	SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM	
0 PLG ± .010		PRODUCT SPEC	108-25034	SIZE	
1 PLG ± .010		APPLICATION SPEC	114-25026	DATE CODE (DRAWING ID)	
2 PLG ± .010		RIGHT	-	RESTRICTED TO	
3 PLG ± .010		SEE TABLE	-	A2 00779 C=103945	
4 PLG ± .010		CUSTOMER DRAWING		SCALE 4:1	
ANGLES ± .5°		SHEET 1 of 1		REV M2	