



## Heyco® Nylon PCB Supports - Metric Reverse Locking

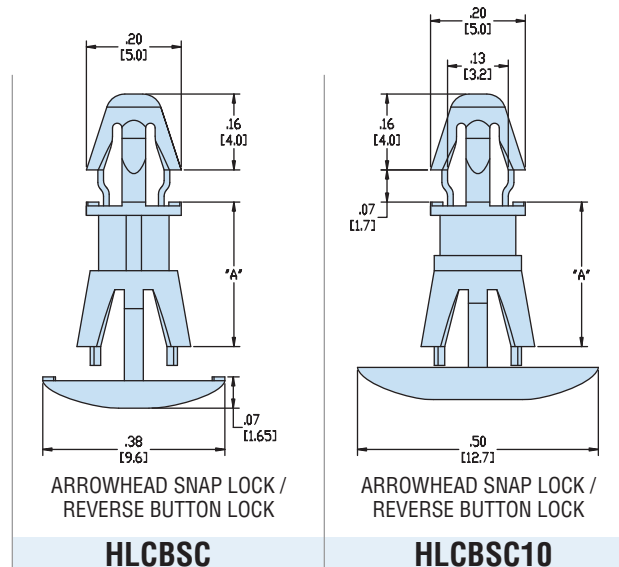

|          | Maximum Thickness   |     | Mounting Hole Diameter |     | Maximum Thickness   |     | Mounting Hole Diameter |     |
|----------|---------------------|-----|------------------------|-----|---------------------|-----|------------------------|-----|
|          | in.                 | mm. | in.                    | mm. | in.                 | mm. | in.                    | mm. |
| PCB      | .062                | 1,6 | .157                   | 4,0 | .062                | 1,6 | .157                   | 4,0 |
| Chassis  | .062                | 1,6 | .212                   | 5,4 | .062                | 1,6 | .212                   | 5,4 |
| A<br>mm. | PART NO.<br>Natural |     | DESCRIPTION            |     | PART NO.<br>Natural |     | DESCRIPTION            |     |
| 6,0      | 10433               |     | HLCBSC-06M             |     |                     |     |                        |     |
| 8,0      | 10434               |     | HLCBSC-08M             |     | 10439               |     | HLCBSC10-08M           |     |
| 10,0     | 10435               |     | HLCBSC-10M             |     | 10440               |     | HLCBSC10-10M           |     |
| 12,0     | 10436               |     | HLCBSC-12M             |     | 10441               |     | HLCBSC10-12M           |     |
| 14,0     | 10437               |     | HLCBSC-14M             |     | 10442               |     | HLCBSC10-14M           |     |

Standard color natural. For special order parts in UL 94V-0 material, add the suffix “F” to Part No.

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: .4°F (-18°C) to 185°F (85°C)

*Quick  
Specs*

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[10440F](#) [10439](#) [10437](#) [10435](#) [10436](#) [10434](#) [10433](#) [10442](#) [10440](#) [10436F](#) [10441](#) [10433F](#) [10441F](#) [10437F](#)  
[10439F](#) [10435F](#) [10434F](#) [10442F](#)