



Connectivity Solutions

Complete or Partial Part #,
Competitor Part # or
Keywords.

[Wireless](#)[CATV](#)[Audio & Video](#)[Networking & Structured Wiring](#)[Military & Aerospace](#)[Test & Measurement](#)[Home](#)[Member Access](#)[Products](#)[Connectors](#)[Microwave Components](#)[CATV Components](#)[Coaxial Cable Assemblies](#)[Structured Cabling & Connectors](#)[Tools & Accessories](#)[Customer Service](#)[Request For Quote](#)[Representatives](#)[Distributors](#)[Literature/Catalog Request](#)[What's New](#)[About Our Brands](#)[Legal Terms](#)[© 2007 All Rights Reserved](#)

Product Detail



Product Line: [Johnson](#) (Click for customer service)

Part Number: 108-1762-101

Description: Banana Plug - Insulated Hex Body Solder Stud

Product Family: BANANA PLUG

Body Material: Brass per QQ-B-626D

Breakdown Voltage: 3500 Vrms min.

Color / Finish: Red

Contact Finish: Nickel

Contact Termination: Solder

Current: 15 amps

Desc 2: Solder Stud

Description: Insulated Hex Body

For Use With: .166 (4.23) Banana Jack

RoHS Compliant: Yes

20070523-1523

Banana Plug - Insulated Hex Body Solder Stud


JOHNSON
Components™
INCHES (MILLIMETERS)
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps
Breakdown Voltage: 3500 Vrms minimum
Contact Resistance: 0.010 ohms maximum

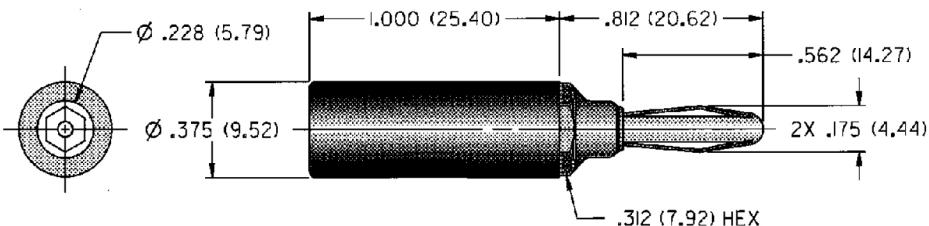

NICKEL PLATING	
108-1762-101	Red

For Standard Banana Jack: .166 (4.23) Diameter

FEATURES:

- Wire can be soldered to threaded stud or flared and held by stud for solderless connection
- Solder stud accepts up to 16 gauge wire
- Nylon UL approved for self extinguishing