




PRODUCT DATASHEET Cindy series

last update 21/3/2013



Ordering number C10982_CINDY-S

FWHM Family Cindy 34 degrees 87 % Type Reflector Efficiency 1.360 LED Mini Zenigata (GW6BM) cd/lm Color Metal Gerber File Available Diameter 22.6 mm 12.5 mm

Height 12.5 m Style Hexag Optic Material PC Holder Material -Fastening -Status Ready

Ordering number C10983_CINDY-M

FamilyCindyFWHM43 degreesTypeReflectorEfficiency85 %LEDMini Zenigata (GW6BM)cd/lm1.410ColorMetalGerber FileAvailable

Color Metal
Diameter 22.6 mm
Height 12.5 mm
Style Hexag
Optic Material PC
Holder Material Fastening Glue
Status Ready

Ordering number C12211_CINDY-M2

FWHM Cindy 44 degrees Family Reflector Efficiency 89 % Type LED Mini Zenigata (GW6BM) 1.410 cd/lm Available Color Metal Gerber File

No metal coating on back side.

Diameter 22.6 mm
Height 12.5 mm
Style Hexag
Optic Material PC
Holder Material Fastening Glue

Fastening Glue Status Ready

Ordering number C10984_CINDY-W

Family Cindy FWHM 59 degrees
Type Reflector Efficiency 87 %
LED Mini Zenigata (GW6BM) cd/lm 1.000
Color Metal Gerber File Available

Color Metal
Diameter 22.6 mm
Height 12.5 mm
Style Hexag
Optic Material PC
Holder Material
Fastening Glue
Status Ready

May 8th 2013 16:24 Copyright Ledil Oy - Subject to change without prior notice - Page 1/3



PRODUCT DATASHEET Cindy series last update 21/3/2013

SHARP

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.





PRODUCT DATASHEET Cindy series

last update 21/3/2013

GENERAL INFORMATION


- Product series especially designed & optimized for Mini Zenigata (GW6BM) series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).
- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.

http://www.ledil.com/datasheets/DataSheet_GLUES.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit boar weaken the strength of the glue.

NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.


Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

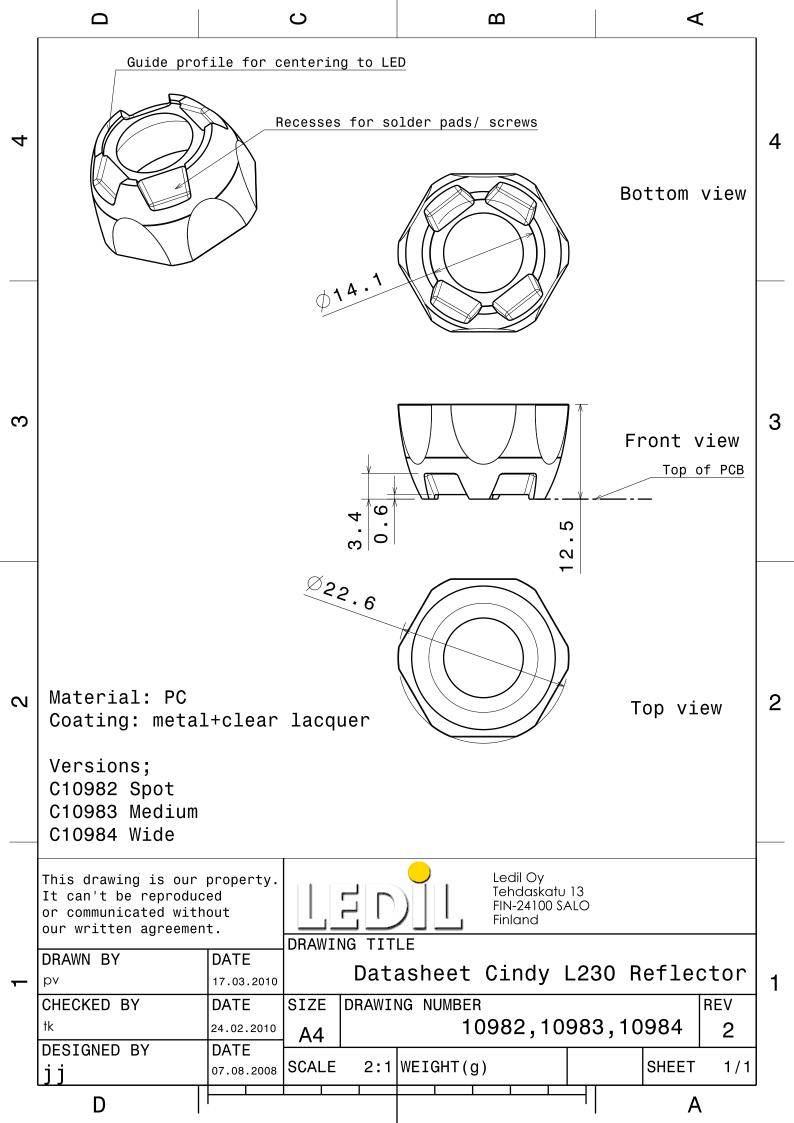


Luminaire: LEDiL Oy C10982_CINDY-S_(Mini_Zenigata) Eff.87.4% Lamps: 1 x Mini_Zenigata GW6BM (803.772Im@250mA)

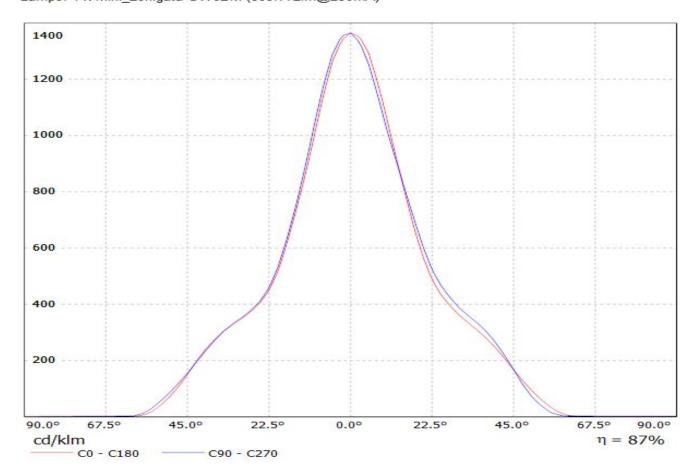


Luminaire: LEDiL Oy C10983_CINDY-M_(Mini_Zenigata) Eff.85.2% Lamps: 1 x Mini_Zenigata GW6BM (803.772lm@250mA)

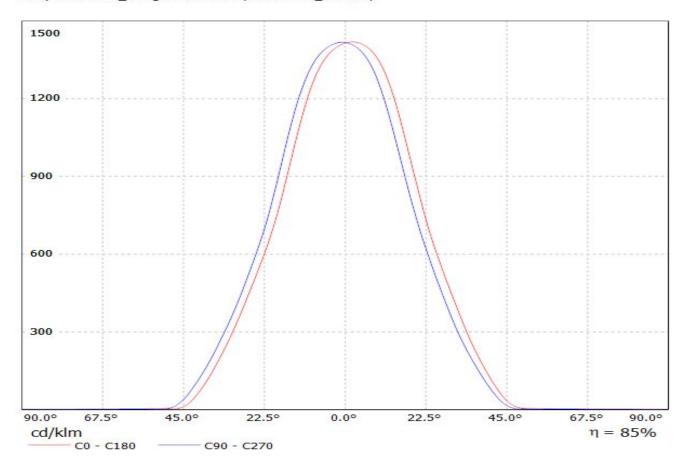


Luminaire: LEDiL Oy C12211_CINDY-M2_(Mini_Zenigata) Eff.89.2% Lamps: 1 x Mini_Zenigata GW6BM (803.772Im@250mA)

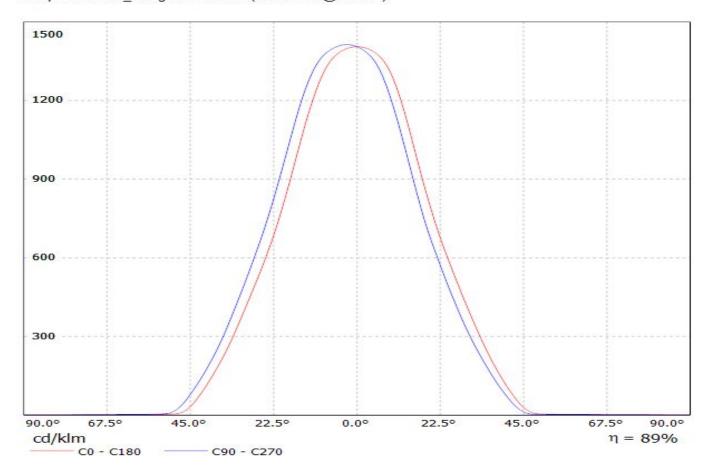


Luminaire: LEDiL Oy C10984_CINDY-W_(Mini_Zenigata) Eff.87.3% Lamps: 1 x Mini_Zenigata GW6BM (803.772lm@250mA)

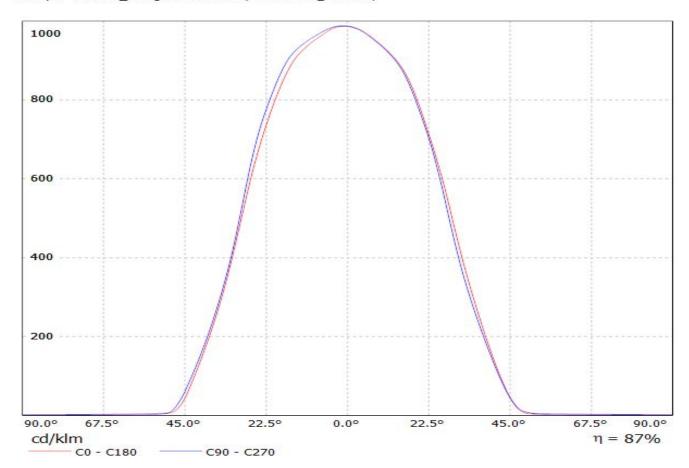


Luminaire: LEDiL Oy C10982_CINDY-S_(Mini_Zenigata) Eff.87.4% Lamps: 1 x Mini_Zenigata GW6BM (803.772Im@250mA)

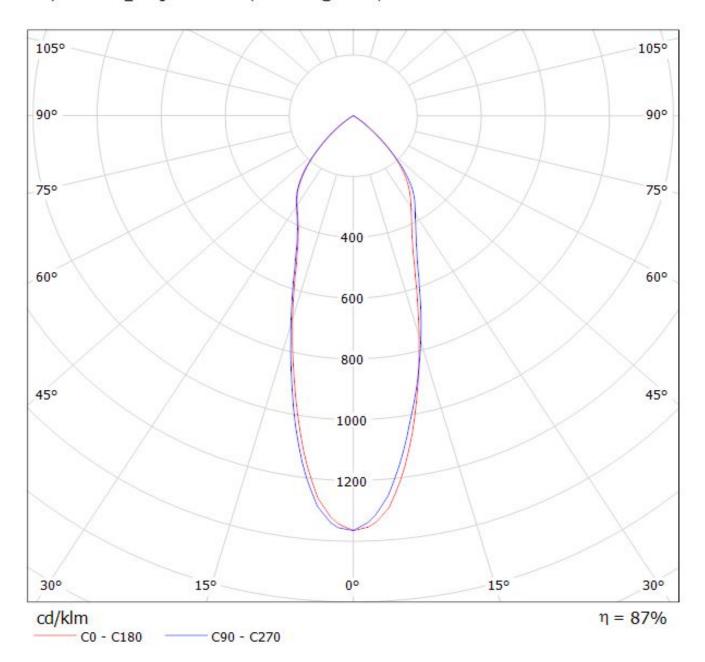

Luminaire: LEDiL Oy C10983_CINDY-M_(Mini_Zenigata) Eff.85.2% Lamps: 1 x Mini_Zenigata GW6BM (803.772lm@250mA)

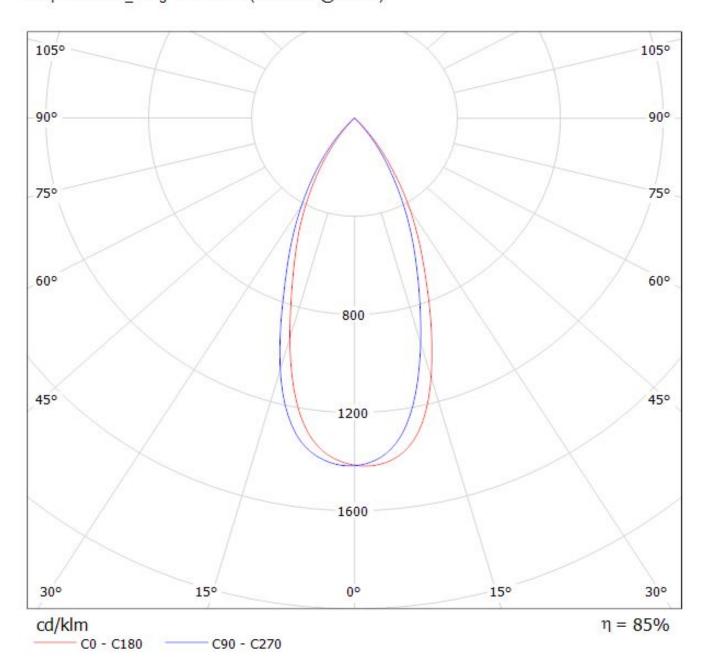

Luminaire: LEDiL Oy C12211_CINDY-M2_(Mini_Zenigata) Eff.89.2% Lamps: 1 x Mini_Zenigata GW6BM (803.772Im@250mA)

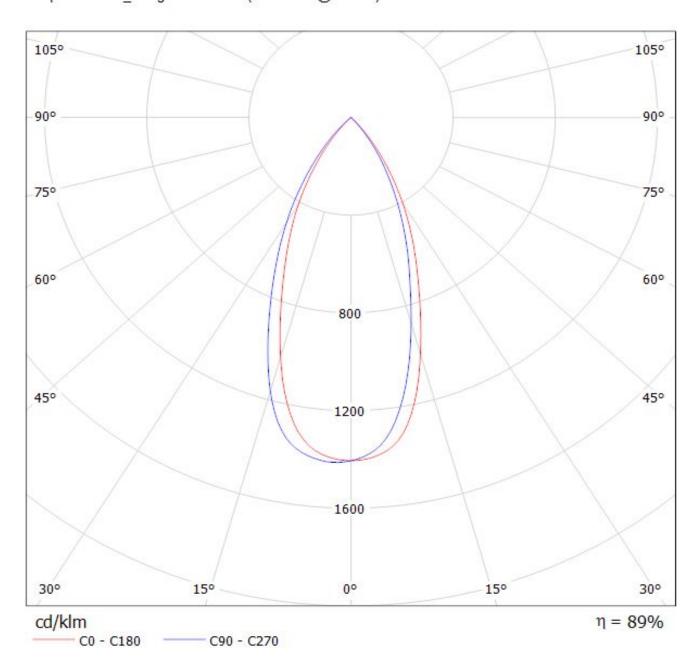

Luminaire: LEDiL Oy C10984_CINDY-W_(Mini_Zenigata) Eff.87.3% Lamps: 1 x Mini_Zenigata GW6BM (803.772lm@250mA)

