


Inductive proximity switch

IR06.P03S-11148719

dimension drawing

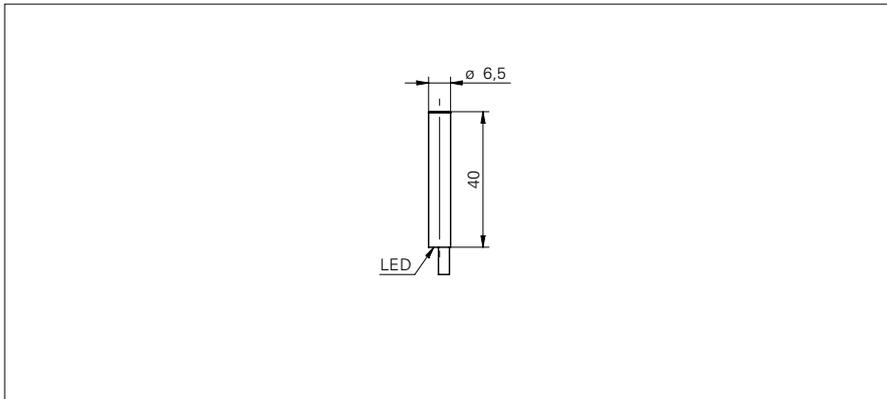

general data

| | |
|--------------------------------|---|
| mounting type | flush |
| special type | enhanced distance (GammaProx) |
| nominal sensing distance S_n | 3 mm |
| temperature drift | $\pm 10 \%$ |
| hysteresis | 3 ... 20 % of S_r |
| output indicator | LED red |
| correction factor typ. | mild steel 100 %, stainless steel 65 %, aluminum 30 % |

electrical data

| | |
|------------------------------------|------------------------|
| switching frequency | < 2 kHz |
| voltage supply range +Vs | 6 ... 36 VDC |
| current consumption max. (no load) | 10 mA |
| output circuit | PNP make function (NO) |
| voltage drop V_d | < 2 VDC |
| output current | < 100 mA |
| short circuit protection | yes |
| reverse polarity protection | yes |

mechanical data

| | |
|-------------------------|--------------------|
| type | cylindrical smooth |
| material (sensing face) | PBT |
| housing material | stainless steel |
| dimension | 6,5 mm |
| housing length | 40 mm |
| connection types | cable, 2 m |


ambient conditions

| | |
|-----------------------|----------------|
| operating temperature | -25 ... +75 °C |
| protection class | IP 67 |

photo



connection diagram

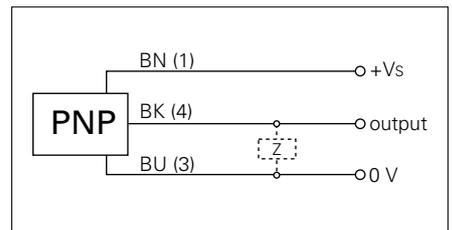


• triple sensing distance


Inductive proximity switch

IR06.P03S-11148719

correction factors for different mounting situations (approximate values)



| Mounting material | Correction factor |
|-------------------|-------------------|
| Mild steel | 100 % |
| Stainless steel | 100 % |
| Aluminum | 100 % |



| Mounting material | Correction factor |
|-------------------|-------------------|
| Mild steel | 85 % |
| Stainless steel | 65 % |
| Aluminum | 55 % |



| Mounting material | Correction factor |
|-------------------|-------------------|
| Mild steel | 90 % |
| Stainless steel | 60 % |
| Aluminum | 45 % |