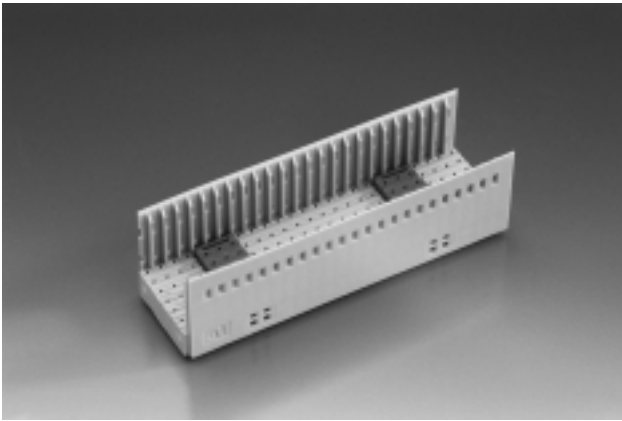
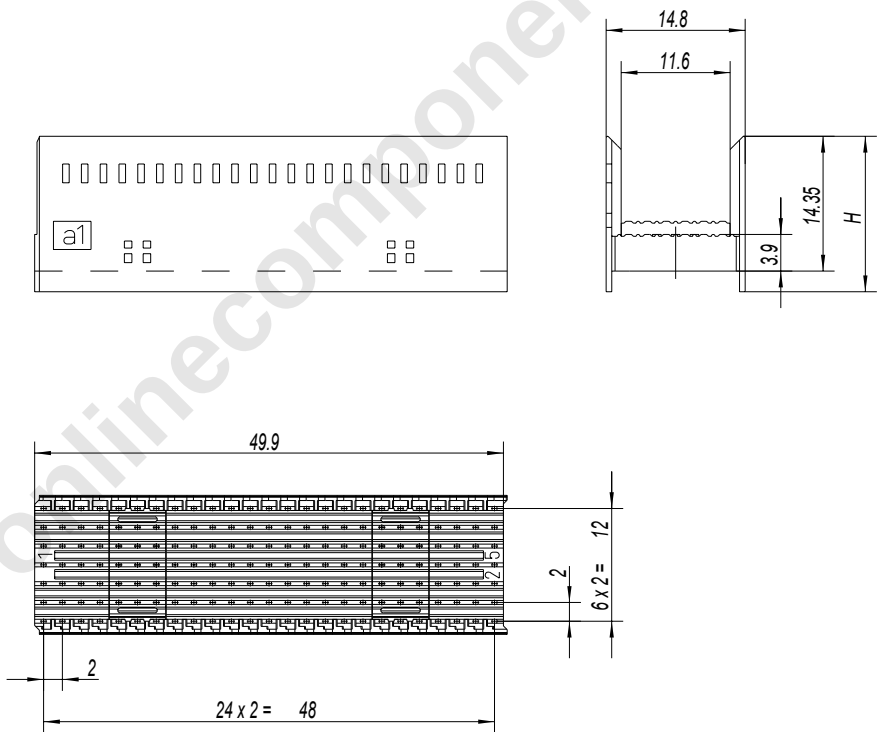


Shrouds Type B For Backplanes



The ERmet™ shroud type B is possible for a maximum of 175 contacts in 7 rows by 25 positions. The two outer rows, z and f are for the shielding contacts of the female connector. For this type , without multifuntion block for coding and pre-alignment, we recommend use only in combination with types A or C.

Dimensional drawings



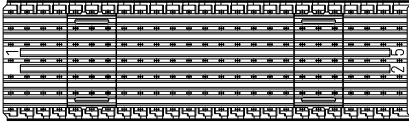
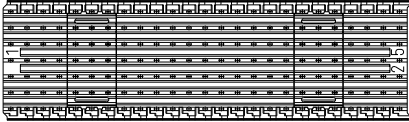
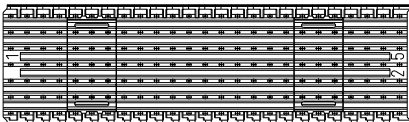
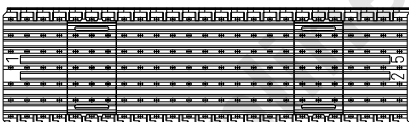
H	Ident-Nr. / Part No.
14.35	114437
14.95	054797
15.75	054798
16.55	054799

Sammelzeichnung
Combination Drawing

Note: All dimensions in mm.

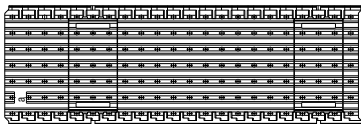

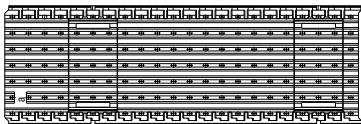

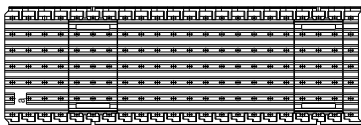

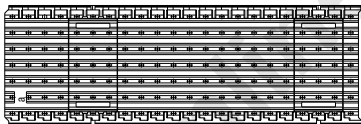

Shrouds Type B For Backplanes

Ordering Information

Configuration	Used For	No. of Pins	Part Number
Type B Shroud 25 Positions 	Height 14.35		114437
Type B Shroud 25 Positions 	Height 14.95		054797
Type B Shroud 25 Positions 	Height 15.75		054798
Type B Shroud 25 Positions 	Height 16.55		054799





Shrouds Type B For Backplanes

Ordering Information

Configuration	Used For	No. of Pins	Part Number
Type B Shroud 22 Positions  	Height 14.35		114619
Type B Shroud 22 Positions  	Height 14.95		064692
Type B Shroud 22 Positions  	Height 15.75		064693
Type B Shroud 22 Positions  	Height 16.55		064694

Shrouds Type B For Backplanes

Ordering Information

Configuration	Used For	No. of Pins	Part Number
Type B Shroud 19 Positions 	Height 14.35		114618
Type B Shroud 19 Positions 	Height 14.95		064622
Type B Shroud 19 Positions 	Height 15.75		064623
Type B Shroud 19 Positions 	Height 16.55		064624