

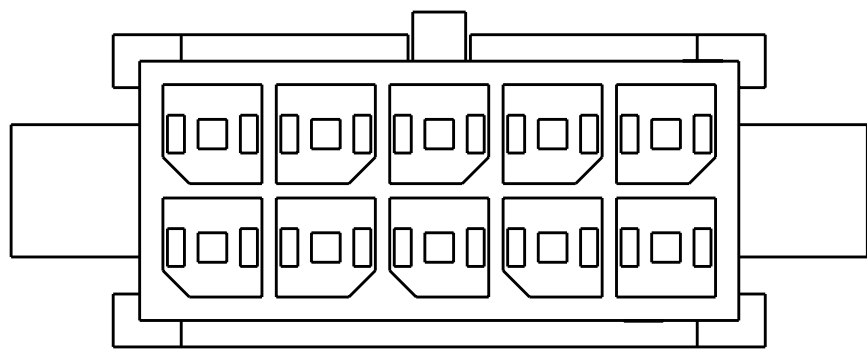
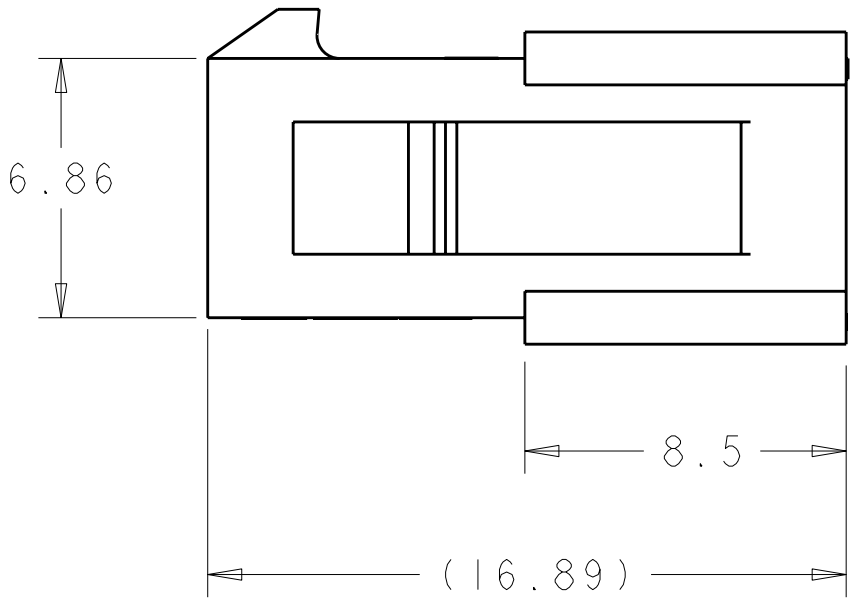
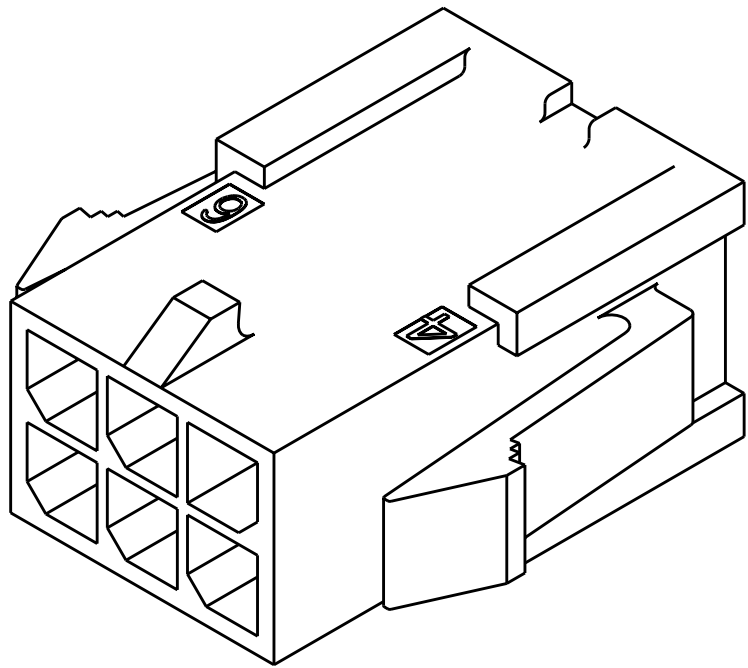
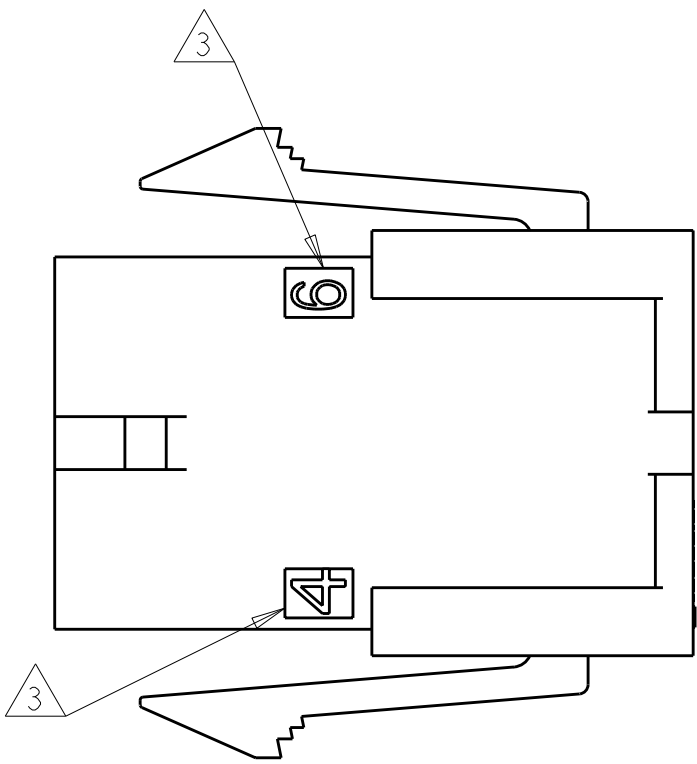
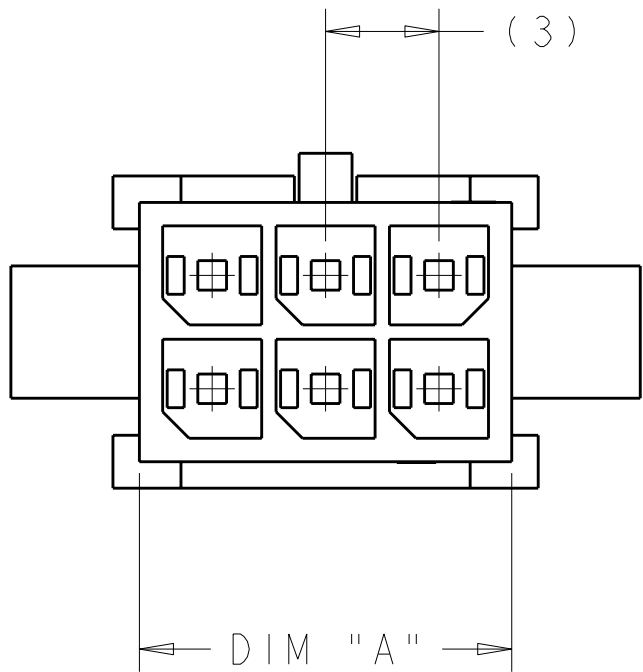


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	ECO-08-006054	11MAR2008	KW	CJ


1. RECOMMENDED PANEL THICKNESS 1.57-2.3.
2. PANEL MUST BE PUNCHED SO THAT HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
3. CIRCUIT IDENTIFIERS LOCATED APPROXIMATELY AS SHOWN.

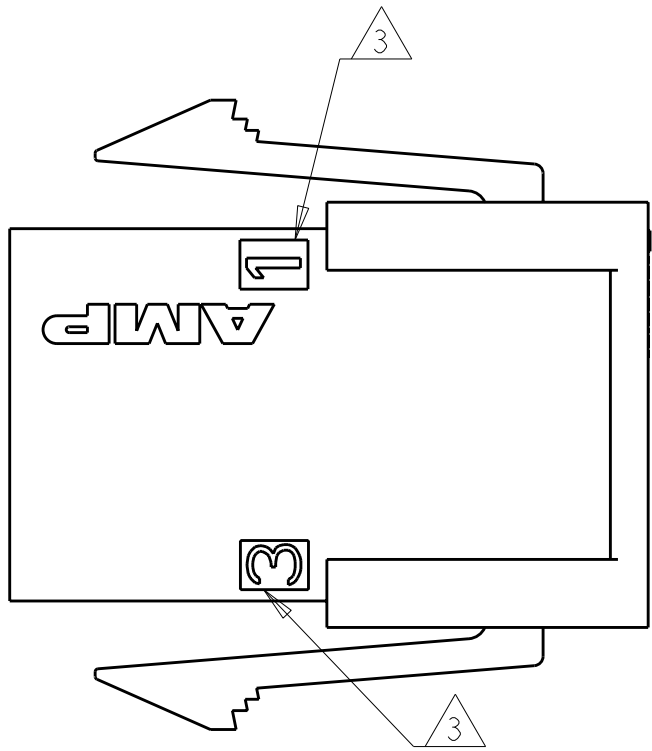

KEYING FOR 1-2029078-0

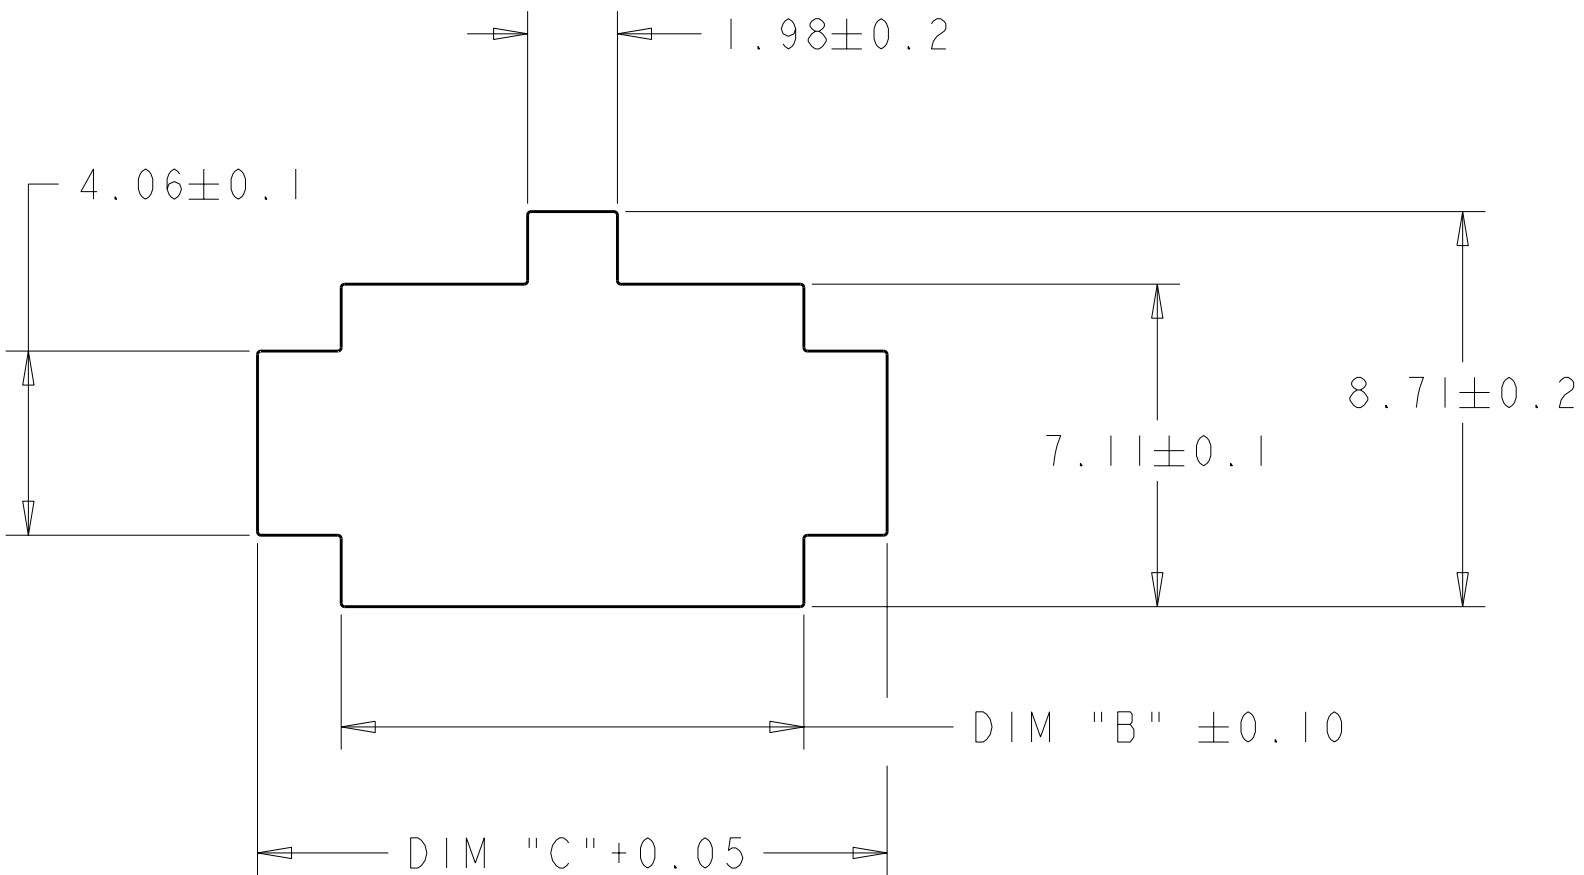

PANEL CUT-OUT 1

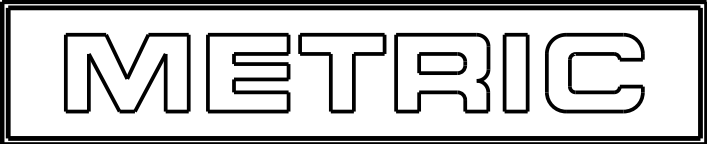

1128.78	19.88	16.2	15.85	10	1-2029078-0
778.28	13.88	10.2	9.85	6	2029078-6
VOLUME mm ³	DIM C	DIM B	DIM A	NO OF POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN K. WHITAKER CHK C. JONES APVD C. JONES	11MAR2008 11MAR2008 11MAR2008	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME PLUG HOUSING, DUAL ROW, PANEL MOUNT, MICRO MATE-N-LOK MICRO MATE-N-LOK(TM)	
MATERIAL NYLON, UL94V-0 NATURAL		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A200779	CAGE CODE C-2029078
CUSTOMER DRAWING		SCALE 5:1		SHEET 1	REV A