




FIBER CONNECTIVITY	
ODC PLUG	LC CONN.
PIN 1	A
PIN 2	B

LABEL DETAIL: 

BAR CODE

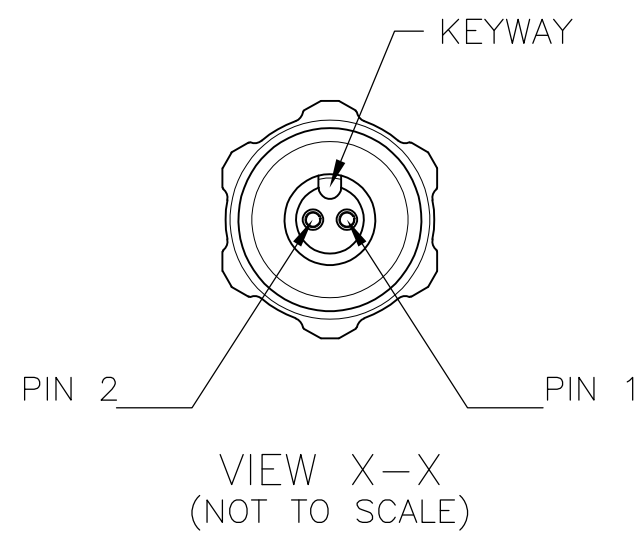

1 REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS
AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO

2 MINIMUM RETURN LOSS: 45 dB FOR BOTH ODC AND LC CONNECTORS
RETURN LOSS WILL BE TESTED AT 1310 nm AND 1550 nm WAVELENGTHS

3 STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950

4 INFORMATION ON LABEL SEE DETAIL:

- BARCODE
- UNIQUE SERIAL NUMBER
- ASSEMBLY LENGTH
- TE CONNECTIVITY PART NUMBER
- TE CONNECTIVITY ORDER NUMBER

5 ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT

6 LENGTH DIFFERENCE BETWEEN LC CONNECTORS < 5 mm

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1920950	
PART NUMBER	"L" (meter) 
X-2064140-Y	XY.0

2	LABEL "A" OR "B"	7
1	FOAC INFORMATION LABEL	6
2	FOAC ODC PROTECTIVE TUBING, BLACK	5
1	FOAC HEAT SHRINK TUBING, BLACK	4
2	LC CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	3
1	FOKIT ODC PLUG ASSEMBLY, 2 FIBER, SINGLE MODE, VINYL CAP	2
L	FOCAB ODC 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 07APR2009 R. COOLEN CHK 07APR2009 A. HENGELMOLEN APVD 07APR2009 A. HENGELMOLEN PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		 TE Connectivity	
DIMENSIONS: METERS 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± ± —		NAME FIBER OPTIC ODC LEAD 2 FOLD PLUG — LC/PC DUAL SINGLE MODE 9/125	
MATERIAL —		FINISH —		SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO C-2064140	RESTRICTED TO —
				SCALE NTS	SHEET 1 OF 1
				REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2064140-4](#)