


NOTE:
SUGGESTED MTG. HOLE $\phi .160$

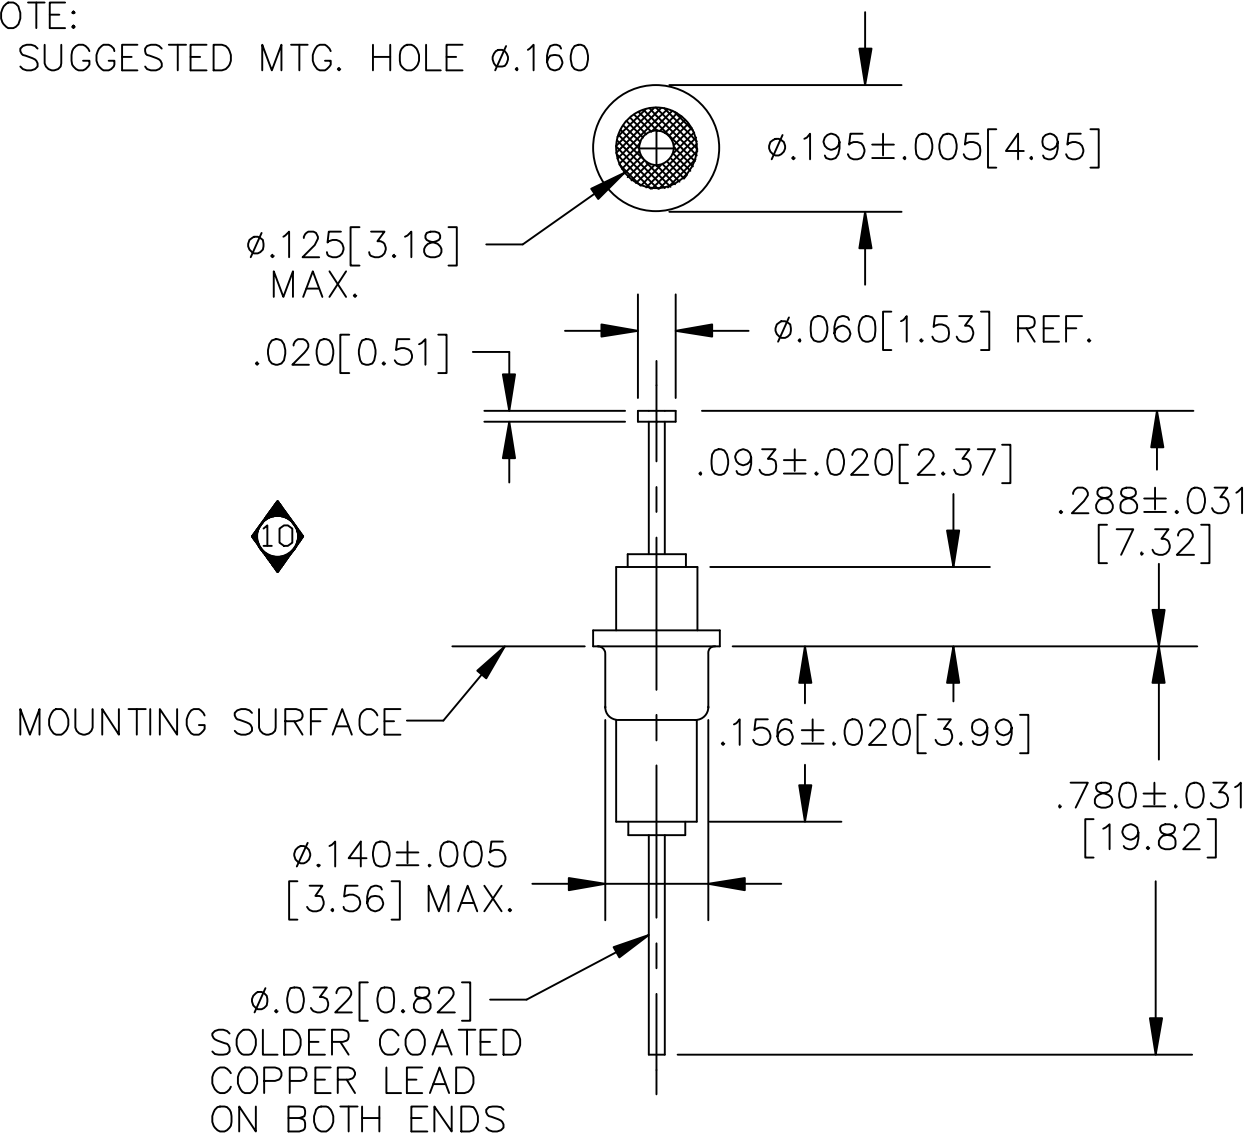


CAPACITANCE	1750pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C: 250 VDC 125°C: 200 VDC


D.C.R.=.01 Ohms MAX.

I.L. PER MIL-STD-220

FREQ. MHz	I.L. (db)
10	5
50	N/A
100	50
500	N/A
1 GHz	60

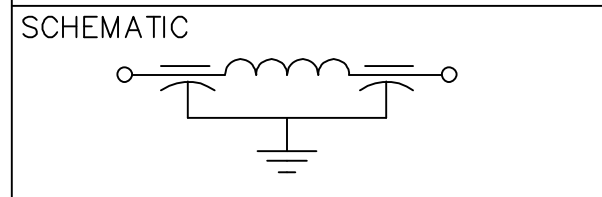

MARKING:
PART: NONE
BAG:
1214-001
DATE CODE
QTY./BAG (200 MAX.)

							REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 FAIRVIEW PENNSYLVANIA	
							CHANGE NOTICE	Fractions $\pm 1/64$	Dwn. KRDZALIC	Description
						Dec. .xx $\pm$				
						Dec. .xxx $\pm$.015		Date 8/12/04	SOLDER-IN FILTER	
						Angles $\pm 0^{\circ} 30'$		Engr GRUNAUER		
						CODE IDENT. NO. OLSP2		Scale N.T.S.		
	CN 13657-CPD	CN 210694	CN 202455 REDRAWN	CN 201264	CN 191480	CN 184998				1214-001