


FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	24 AWG SOLID
	MATERIAL	SOLID BARE COPPER
INSULATION	MATERIAL	POLYOLEFIN
JACKET	MATERIAL	FR PVC
FILLER	MATERIAL	POLYOLEFIN

COLOR CODE

PAIR COLOR CODE	
1	WHT-BLU/BLU
2	WHT-ORG/ORG
3	WHT-GRN/GRN
4	WHT-BRN/BRN

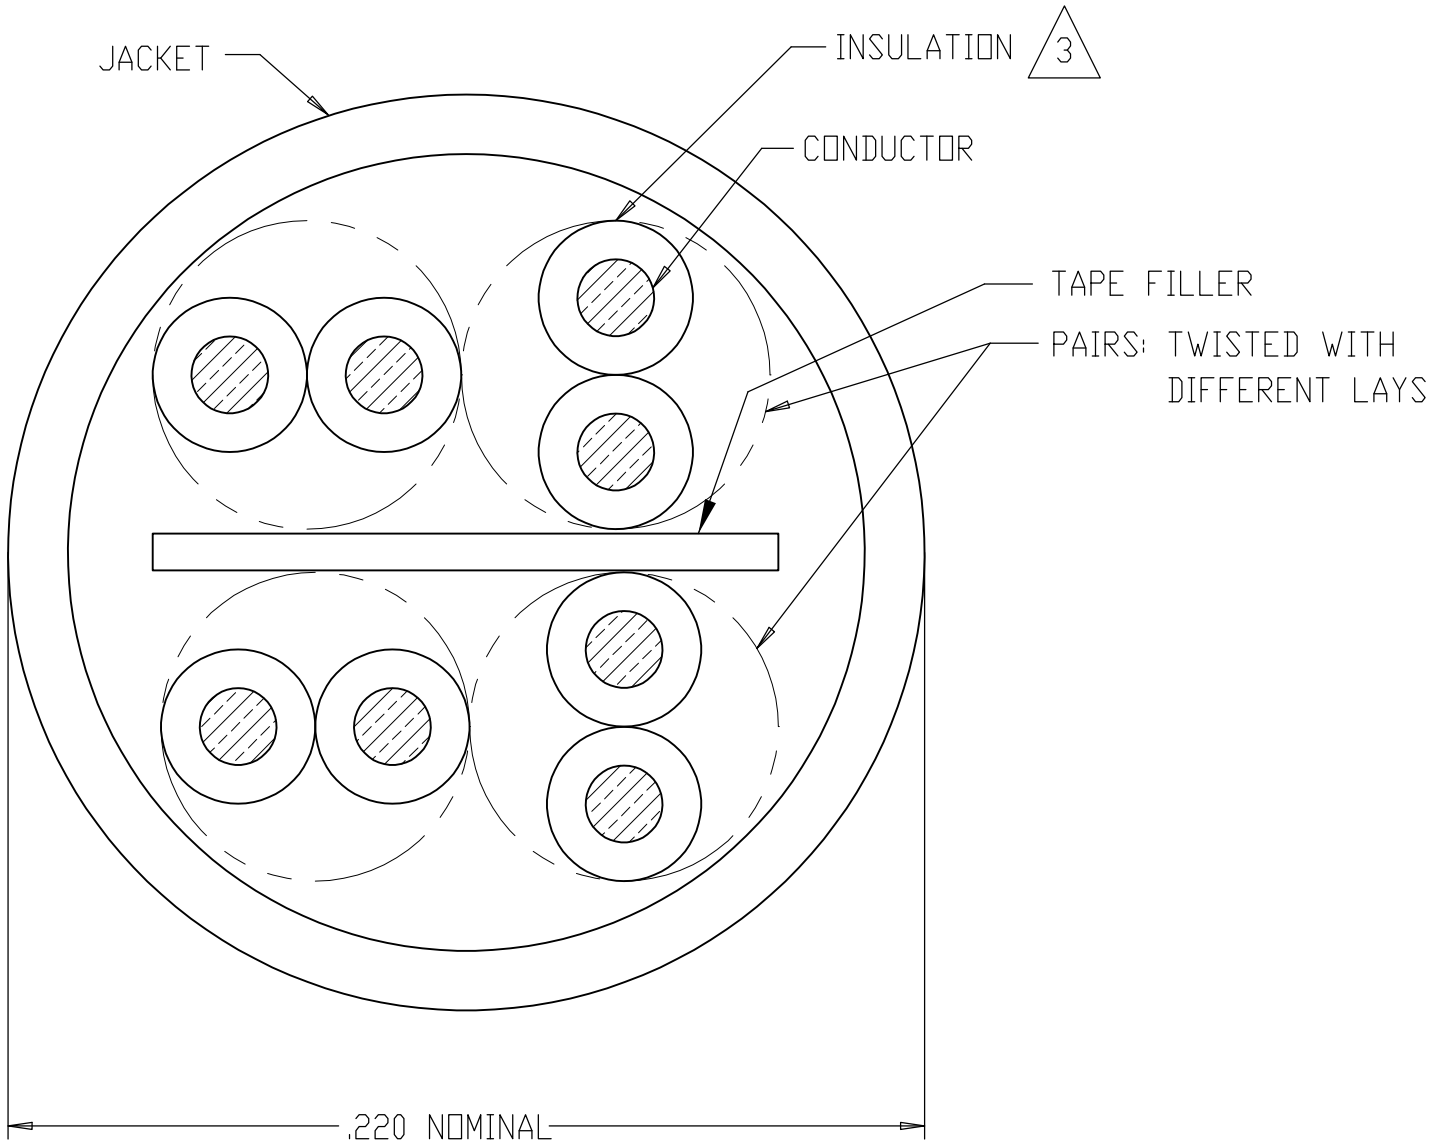

LEGEND TO BE REPEATED EVERY 24±.25"




TE CONNECTIVITY 620 SERIES 4/24 AWG T256 CMR C(UL)US ETL VERIFIED TIA-568-C.2 CAT 6 PAT 6153826 XXXX FT

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
EH	00		WW	REV PER ECO-13-001065	11FEB2013	JM

- 1 SEQUENTIAL FOOTAGE RETURNED TO ZERO FOR EACH LENGTH.
ON PUTUP LENGTHS 3000 FT OR LESS.
- 2 MATERIALS ARE SELECTED BASED ON THEIR ABILITY TO CONFORM
TO UL 444 LATEST ISSUE.
- 3 XX = JACKET COLOR - BL = BLUE, WT = WHITE, GY = GRAY,
GN = GREEN, YL = YELLOW, OR = ORANGE, RD = RED, VT = VIOLET,
BK = BLACK.
4. PRINT COLOR SHALL BE DARK BLUE, EXCEPT WHITE ON BLACK JACKET.
- 5 DATE CODE.
6. GOVERNING SPECIFICATIONS - LATEST REVISIONS
NEC 800
UL444 CMR
TIA 568-C.2 CAT 6
- 7 REPLACE "02" FOR THE FOLLOWING FOOTAGES:
04=2000', 05=2500', CALL FOR ADDITIONAL OPTIONS.

CATALOG NUMBER	WEIGHT		PACKAGING
	LBS/KFT	KG/KM	
TE620R-XX02	28	42	1,000' REEL
TE620R-XXRB	29	44	1,000' REEL IN A BOX
TE620R-XXII	27	41	1,000' REELEX

37

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.D.SIMPSON 03AUG2001		 TE Connectivity			
DIMENSIONS: INCHES		CHK R.SPEER 09JUN00					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.SPEER 09JUN00		NAME CABLE CATEGORY 6, 4UTP, 24 AWG, CMR —		
	0 PLC ± 1 PLC ± .1 2 PLC ± .02 3 PLC ± .005 4 PLC ± .0005 ANGLES ±		PRODUCT SPEC				
	MATERIAL		APPLICATION SPEC				
		FINISH		SIZE A2	CAGE CODE 00779	DRAWING NO C=219560	RESTRICTED TO
CUSTOMER DRAWING				SCALE NTS	SHEET 1 of 1	REV W	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-219560-0](#)