


| FINISHED CABLE DATA |          |                   |
|---------------------|----------|-------------------|
| CONDUCTORS          | WIRE AWG | 24 AWG SOLID      |
|                     | MATERIAL | SOLID BARE COPPER |
| INSULATION          | MATERIAL | POLYOLEFIN        |
| JACKET              | MATERIAL | FR PVC            |
| FILLER              | MATERIAL | POLYOLEFIN        |

COLOR CODE

| PAIR COLOR CODE |             |
|-----------------|-------------|
| 1               | WHT-BLU/BLU |
| 2               | WHT-ORG/ORG |
| 3               | WHT-GRN/GRN |
| 4               | WHT-BRN/BRN |

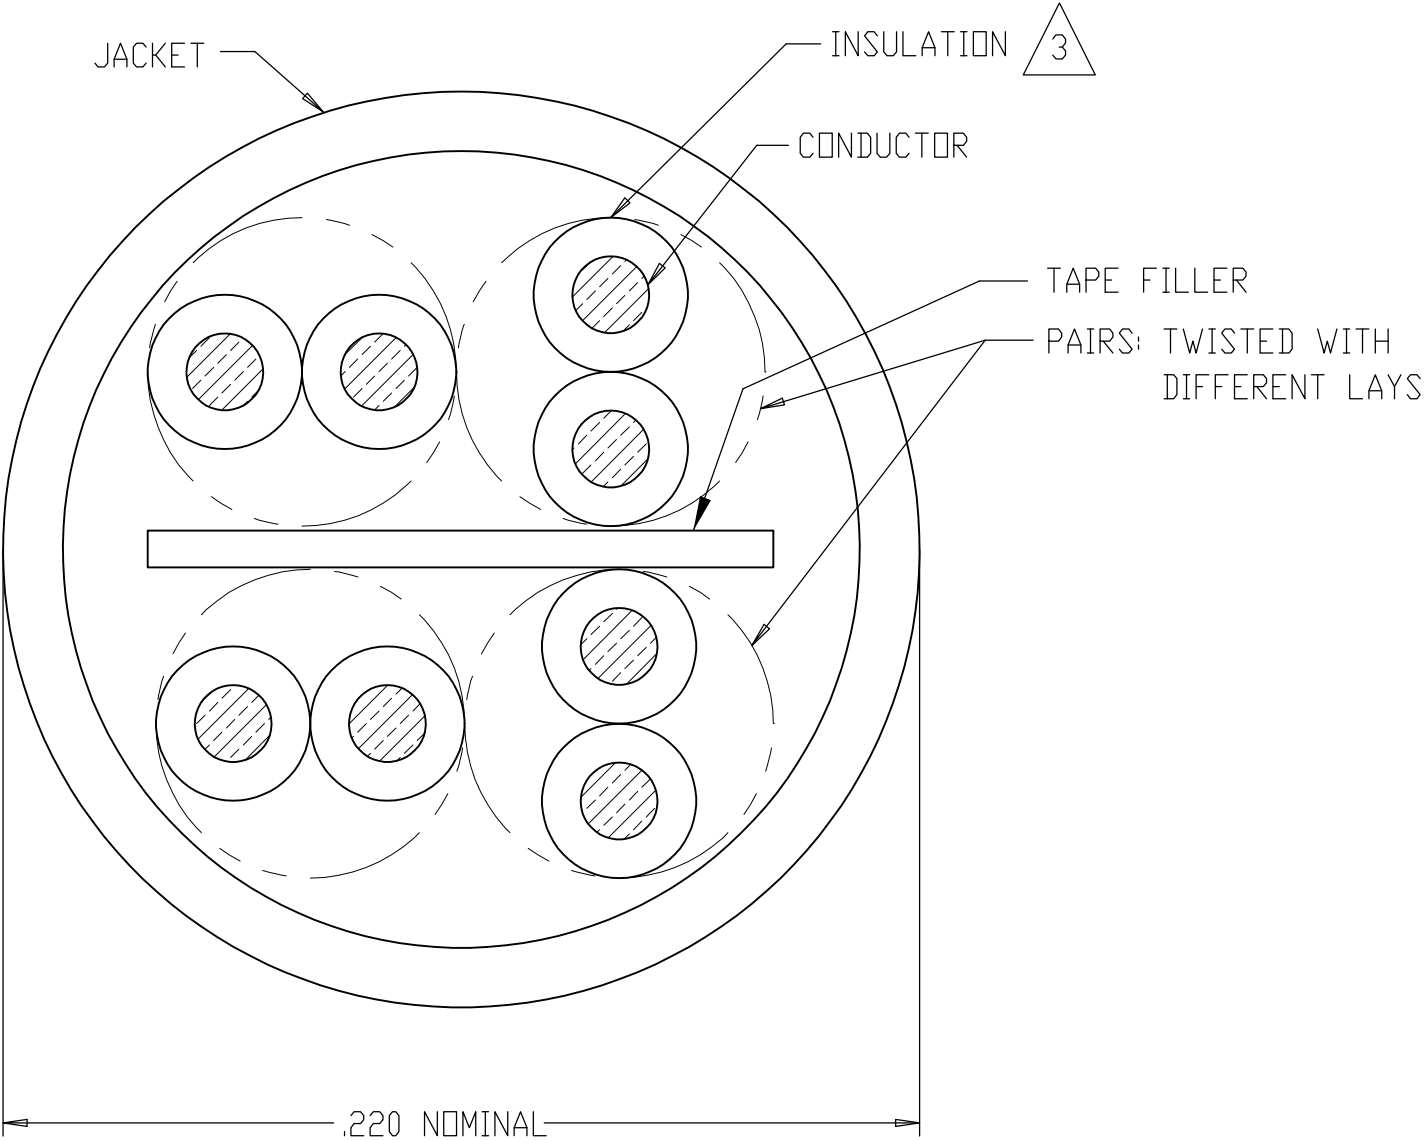

LEGEND TO BE REPEATED EVERY 24±.25"


TE CONNECTIVITY 620 SERIES 4/24 AWG T256 CMR C(UL)US ETL VERIFIED TIA-568-C.2 CAT 6 PAT 6153826 XXXX FT

| LOC | DIST | REVISIONS |     |                       |           |     |
|-----|------|-----------|-----|-----------------------|-----------|-----|
|     |      | P         | LTR | DESCRIPTION           | DATE      | DWN |
| EH  | 00   |           | WW  | REV PER ECO-13-001065 | 11FEB2013 | JM  |
|     |      |           |     |                       |           | LH  |

- 1 SEQUENTIAL FOOTAGE RETURNED TO ZERO FOR EACH LENGTH.  
ON PUTUP LENGTHS 3000 FT OR LESS.
- 2 MATERIALS ARE SELECTED BASED ON THEIR ABILITY TO CONFORM  
TO UL 444 LATEST ISSUE.
- 3 XX = JACKET COLOR - BL = BLUE, WT = WHITE, GY = GRAY,  
GN = GREEN, YL = YELLOW, OR = ORANGE, RD = RED, VT = VIOLET,  
BK = BLACK.
4. PRINT COLOR SHALL BE DARK BLUE, EXCEPT WHITE ON BLACK JACKET.
- 5 DATE CODE.
6. GOVERNING SPECIFICATIONS - LATEST REVISIONS  
NEC 800  
UL444 CMR  
TIA 568-C.2 CAT 6
- 7 REPLACE "02" FOR THE FOLLOWING FOOTAGES:  
04=2000', 05=2500', CALL FOR ADDITIONAL OPTIONS.

| CATALOG<br>NUMBER | WEIGHT  |       | PACKAGING            |
|-------------------|---------|-------|----------------------|
|                   | LBS/KFT | KG/KM |                      |
| TE620R-XX02       | 28      | 42    | 1,000' REEL          |
| TE620R-XXRB       | 29      | 44    | 1,000' REEL IN A BOX |
| TE620R-XXII       | 27      | 41    | 1,000' REELEX        |

37

|                                                                                       |                                                                                   |                                 |                            |                                                                                                       |                                                          |                        |               |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |                                                                                   | DWN<br>L.D.SIMPSON<br>03AUG2001 |                            |  TE Connectivity |                                                          |                        |               |
| DIMENSIONS:<br>INCHES                                                                 |                                                                                   | CHK<br>R.SPEER<br>09JUN00       |                            |                                                                                                       |                                                          |                        |               |
|  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:                                         |                                 | APVD<br>R.SPEER<br>09JUN00 |                                                                                                       | NAME<br><br>CABLE CATEGORY 6, 4UTP, 24 AWG, CMR<br><br>— |                        |               |
|                                                                                       | 0 PLC ±<br>1 PLC ± .1<br>2 PLC ± .02<br>3 PLC ± .005<br>4 PLC ± .0005<br>ANGLES ± |                                 | PRODUCT SPEC               |                                                                                                       |                                                          |                        |               |
|                                                                                       | MATERIAL                                                                          |                                 | APPLICATION SPEC           |                                                                                                       |                                                          |                        |               |
|  |                                                                                   | FINISH                          |                            | SIZE<br>A2                                                                                            | CAGE CODE<br>00779                                       | DRAWING NO<br>C-219560 | RESTRICTED TO |
| CUSTOMER DRAWING                                                                      |                                                                                   |                                 |                            | SCALE<br>NTS                                                                                          | SHEET<br>1 of 1                                          | REV<br>W               |               |