


used for: DIN EN 60603 TYPE "R"

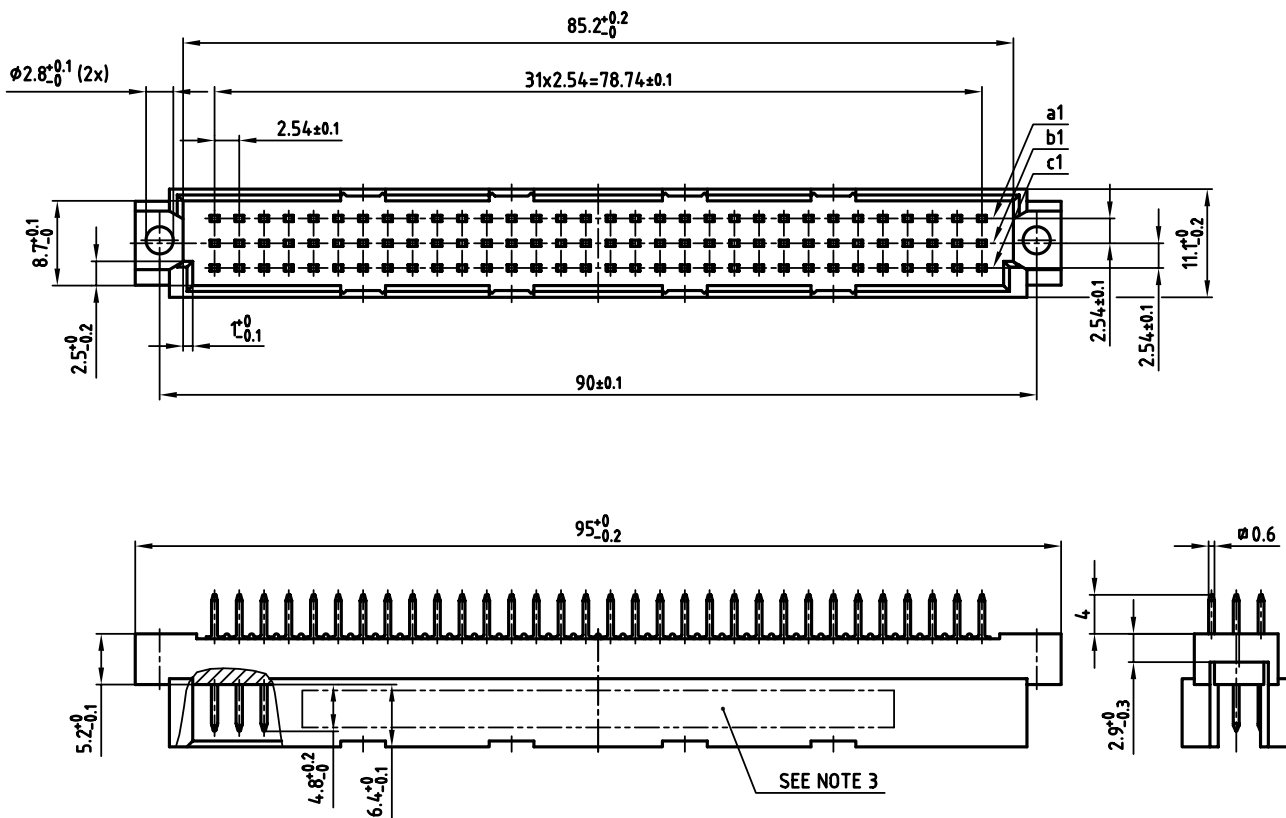


NOTES:

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 121A10569X CONEC ABC

Directive 2002/95/EC
RoHS
Compliant

P.C.B. HOLE DRILLINGS

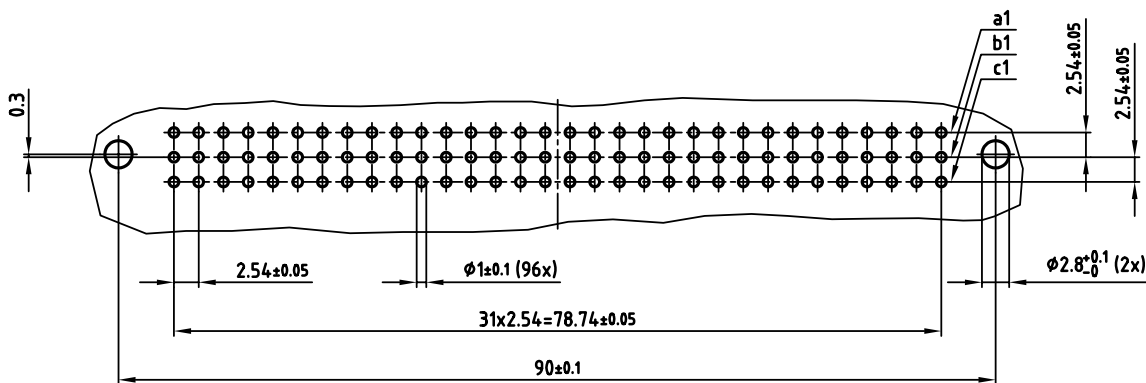

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL

CUSTOMER APPROVAL DATE:

NAME:

TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	date	name
2006	02.02.	Lehmenkühler
drawn	02.02.	Mickenbecker
appd.		
norm		DIN EN 60603
d-old		

CONEC

scale: 2:1
material: SEE NOTES

title: MALE CONNECTOR TYPE "R"
96pos. SOLDER PIN

dwg no: AutoCAD 2004 DIN-A
12K1A419 3
sh: 1/1

part no: 121A10569X