




ENGLISH

Datasheet

BNC straight plug-plug RG59 coaxial cable, 2 m (1222150)

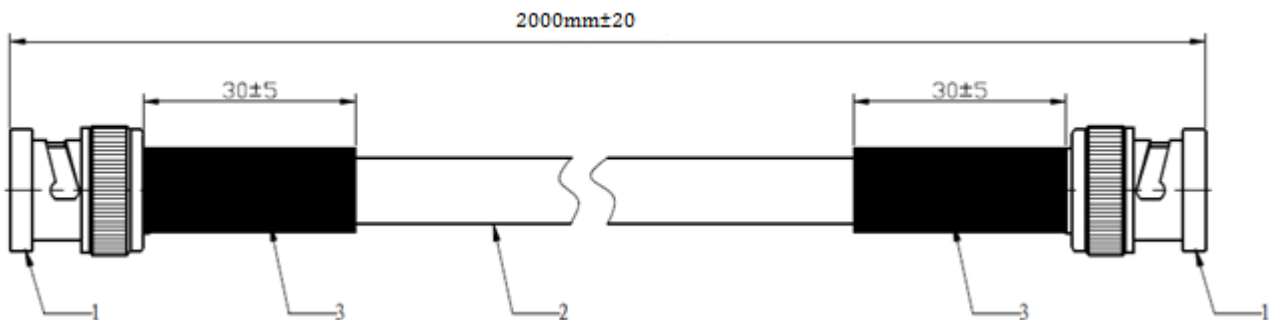

List Nomenclature

1 BNC straight plug connector

2 Coaxial Cable RG59/U

3 Black Protective Sleeve

Electrical Specifications

Impedance $75 \pm 2 \Omega$

Operation Frequency DC to 1.50 GHz

Velocity of Propagation 66%

Voltage Withstand 1200 V

Insertions Losses

Frequency(MHz)	50	400	600	800	1000
Insertion Losses max(dB/m)	1.24	0.45	0.72	1.16	1.06

Mechanical Specifications

Inner Conductor Multi-Brain WCS 0.64 mm

Dielectric PE $\phi = 3.71 \text{ mm}(0.146 \text{ in})$

Outer conductor copper 96% recovering

Jacket PVC $\phi = 6.15 \text{ mm}(0.242 \text{ in})$

Environmental Specifications

Operating Temperature Range - 20°C+80°C

Conditions of delivery

Mechanical check Length

Electrical test Continuity / Rigidity

