



Datasheet

Stock No: 712-5314


ENGLISH

# RS Pro Pink Equipment Wire, 0.28mm<sup>2</sup> CSA, 1000 V 1.8 A 23 AWG, 100m



## Cable Construction

| Conductor                | Tinned Copper |
|--------------------------|---------------|
| square(mm <sup>2</sup> ) | 0.28          |
| Construction             | T0.60±0.01    |
| Standard Dia.(mm)        | 0.60          |
| Insulation               | PVC           |
| Thickness                | 0.3           |
| Insulation Dia.(±0.1mm)  | 1.20          |

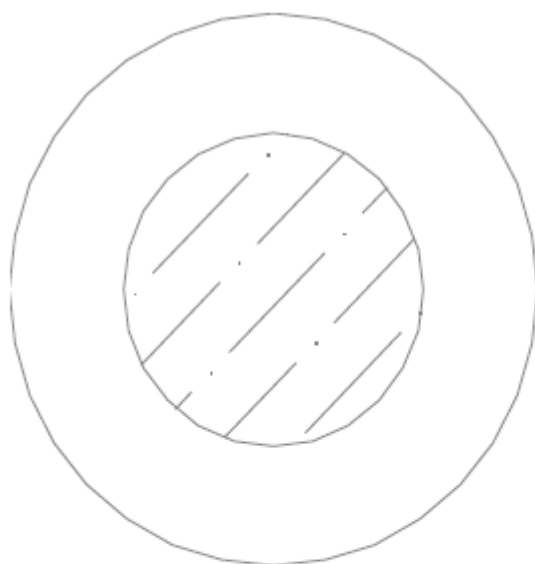

### Electrical Characteristics

|                                                        |      |
|--------------------------------------------------------|------|
| Max.Conductor DC Resistance at 20 °C ( $\Omega$ /Km)   | <67  |
| Min.Insulation DC Resistance at 20 °C (M $\Omega$ *Km) | 200  |
| Rated Temperature(°C)                                  | 70   |
| Rated Voltage (V)                                      | 1000 |