
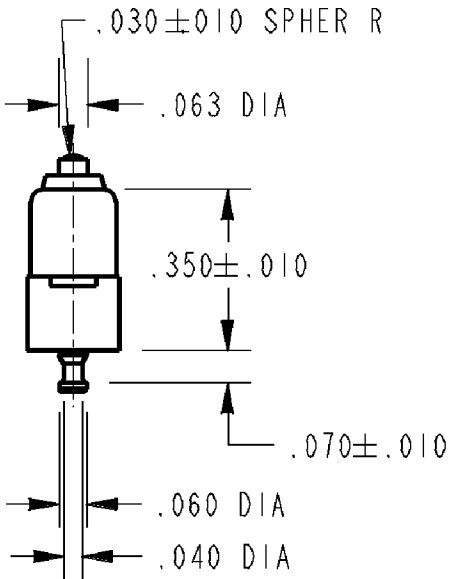
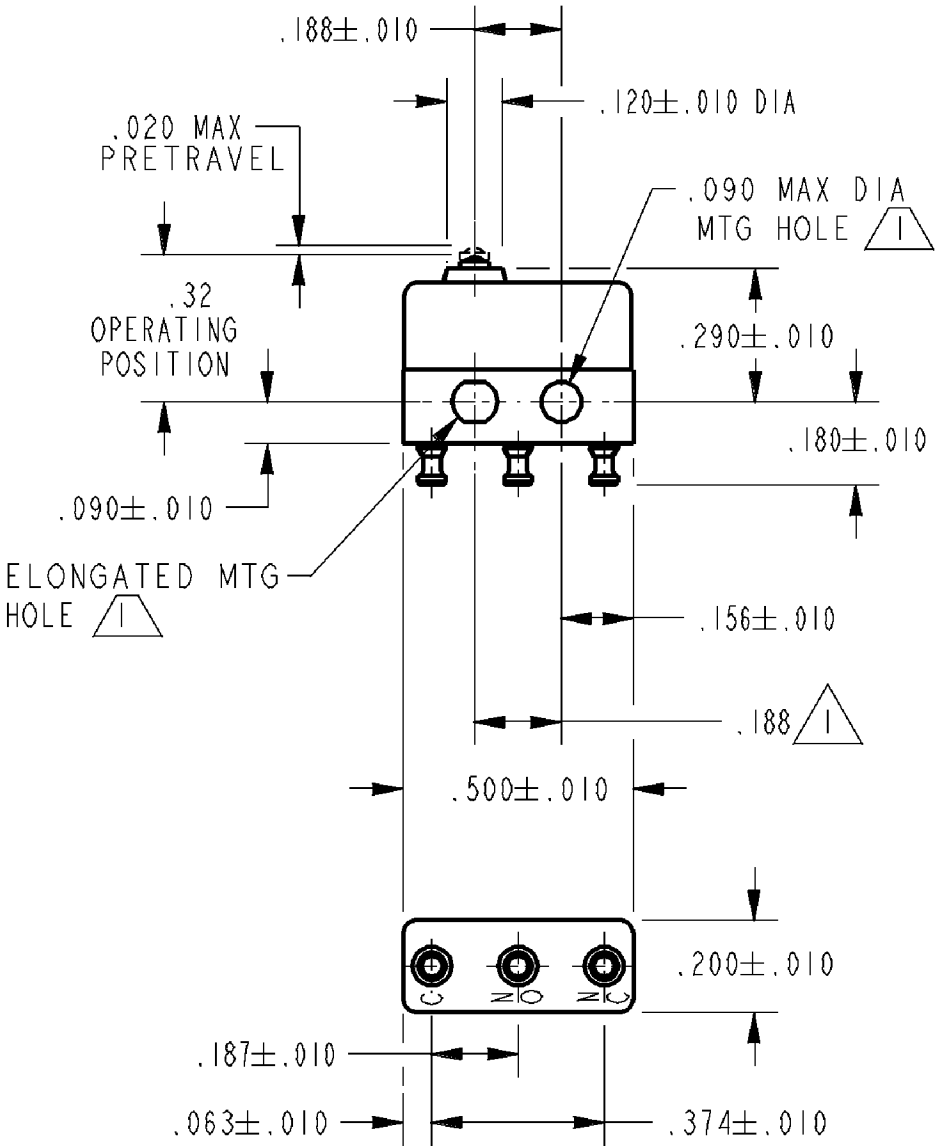


HONEYWELL PART NUMBER
412SX22-T
PRODUCT CODE VDX1225

REV	DOCUMENT	CHANGED BY	CHECK
8	0038558	SS 21MAY08	BLR



NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F
- 4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-18199
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005 THIRD ANGLE PROJECTION 				DRAWN	SPK	28FEB08		Honeywell				
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT SPDT								CHECK	RJ	28FEB08						
RELEASE FORCE----- 1 OZ MIN		28 VOLTS DC RATING								THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL---.003 MAX			SEA LEVEL		50,000 FT													
OVERTRAVEL----- .004 MIN		INDUCTIVE	0.5 AMP		-													
		RESISTIVE	1 AMP		-		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV			
		APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3							CE	B	I	412SX22-T		8		
			UL, CSA	1A 125 VAC							BRAND						L22J	
								RASTER				SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[412SX22-T](#)