



MATERIAL NUMBER	ENGINEERING PART NUMBER	COUPLING NUT MATERIAL	COUPLING NUT FINISH
1300170020	1A4006-34	BRASS	NICKEL PLATED
1300170021	1A4006-348	STAINLESS STEEL	PASSIVATED

O.D. CABLE RANGE
.20-.45/5.0-11.4

B



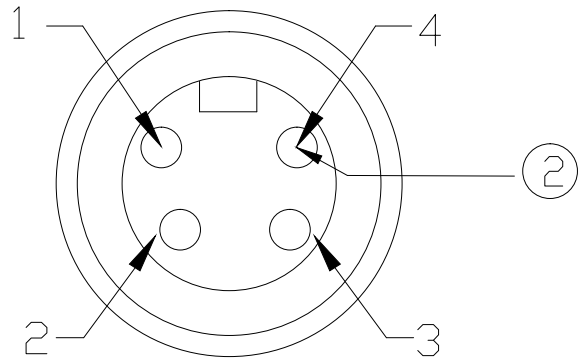

MALE FACE VIEW



WIRING CHART

VOLTAGE RATING	600VAC/VDC
AMPERAGE RATING	16 AWG 13 AMPS 18AWG 8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	PIN CONTACTS	COPPER ALLOY	GOLD PLATED
3	O-RING	NITRILE	BLACK
4	COUPLING NUT	SEE CHART	SEE CHART
5	MOLDED BODY	NYLON	BLACK
6	GROMMET	NITRILE	BLACK
7	CORD GRIP BODY	NYLON	BLACK

B	OD RANGE WAS .20-.48, WAS 10 AMPS EC NO: IPG2013-1684 DRWN: RSTONE 5/1/13 CHK'D: BW APPR: BWOODMAN2009/08/26	DESCRIPTION	QUALITY SYMBOL
			 = 0
			 = 0
REV			

MINI CHANGE ATTACHABLE 4-POLE MALE ST .20-.45 O.D. CABLE RANGE	
MOLEX INCORPORATED	
SD-130017-008	
1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1300170020