




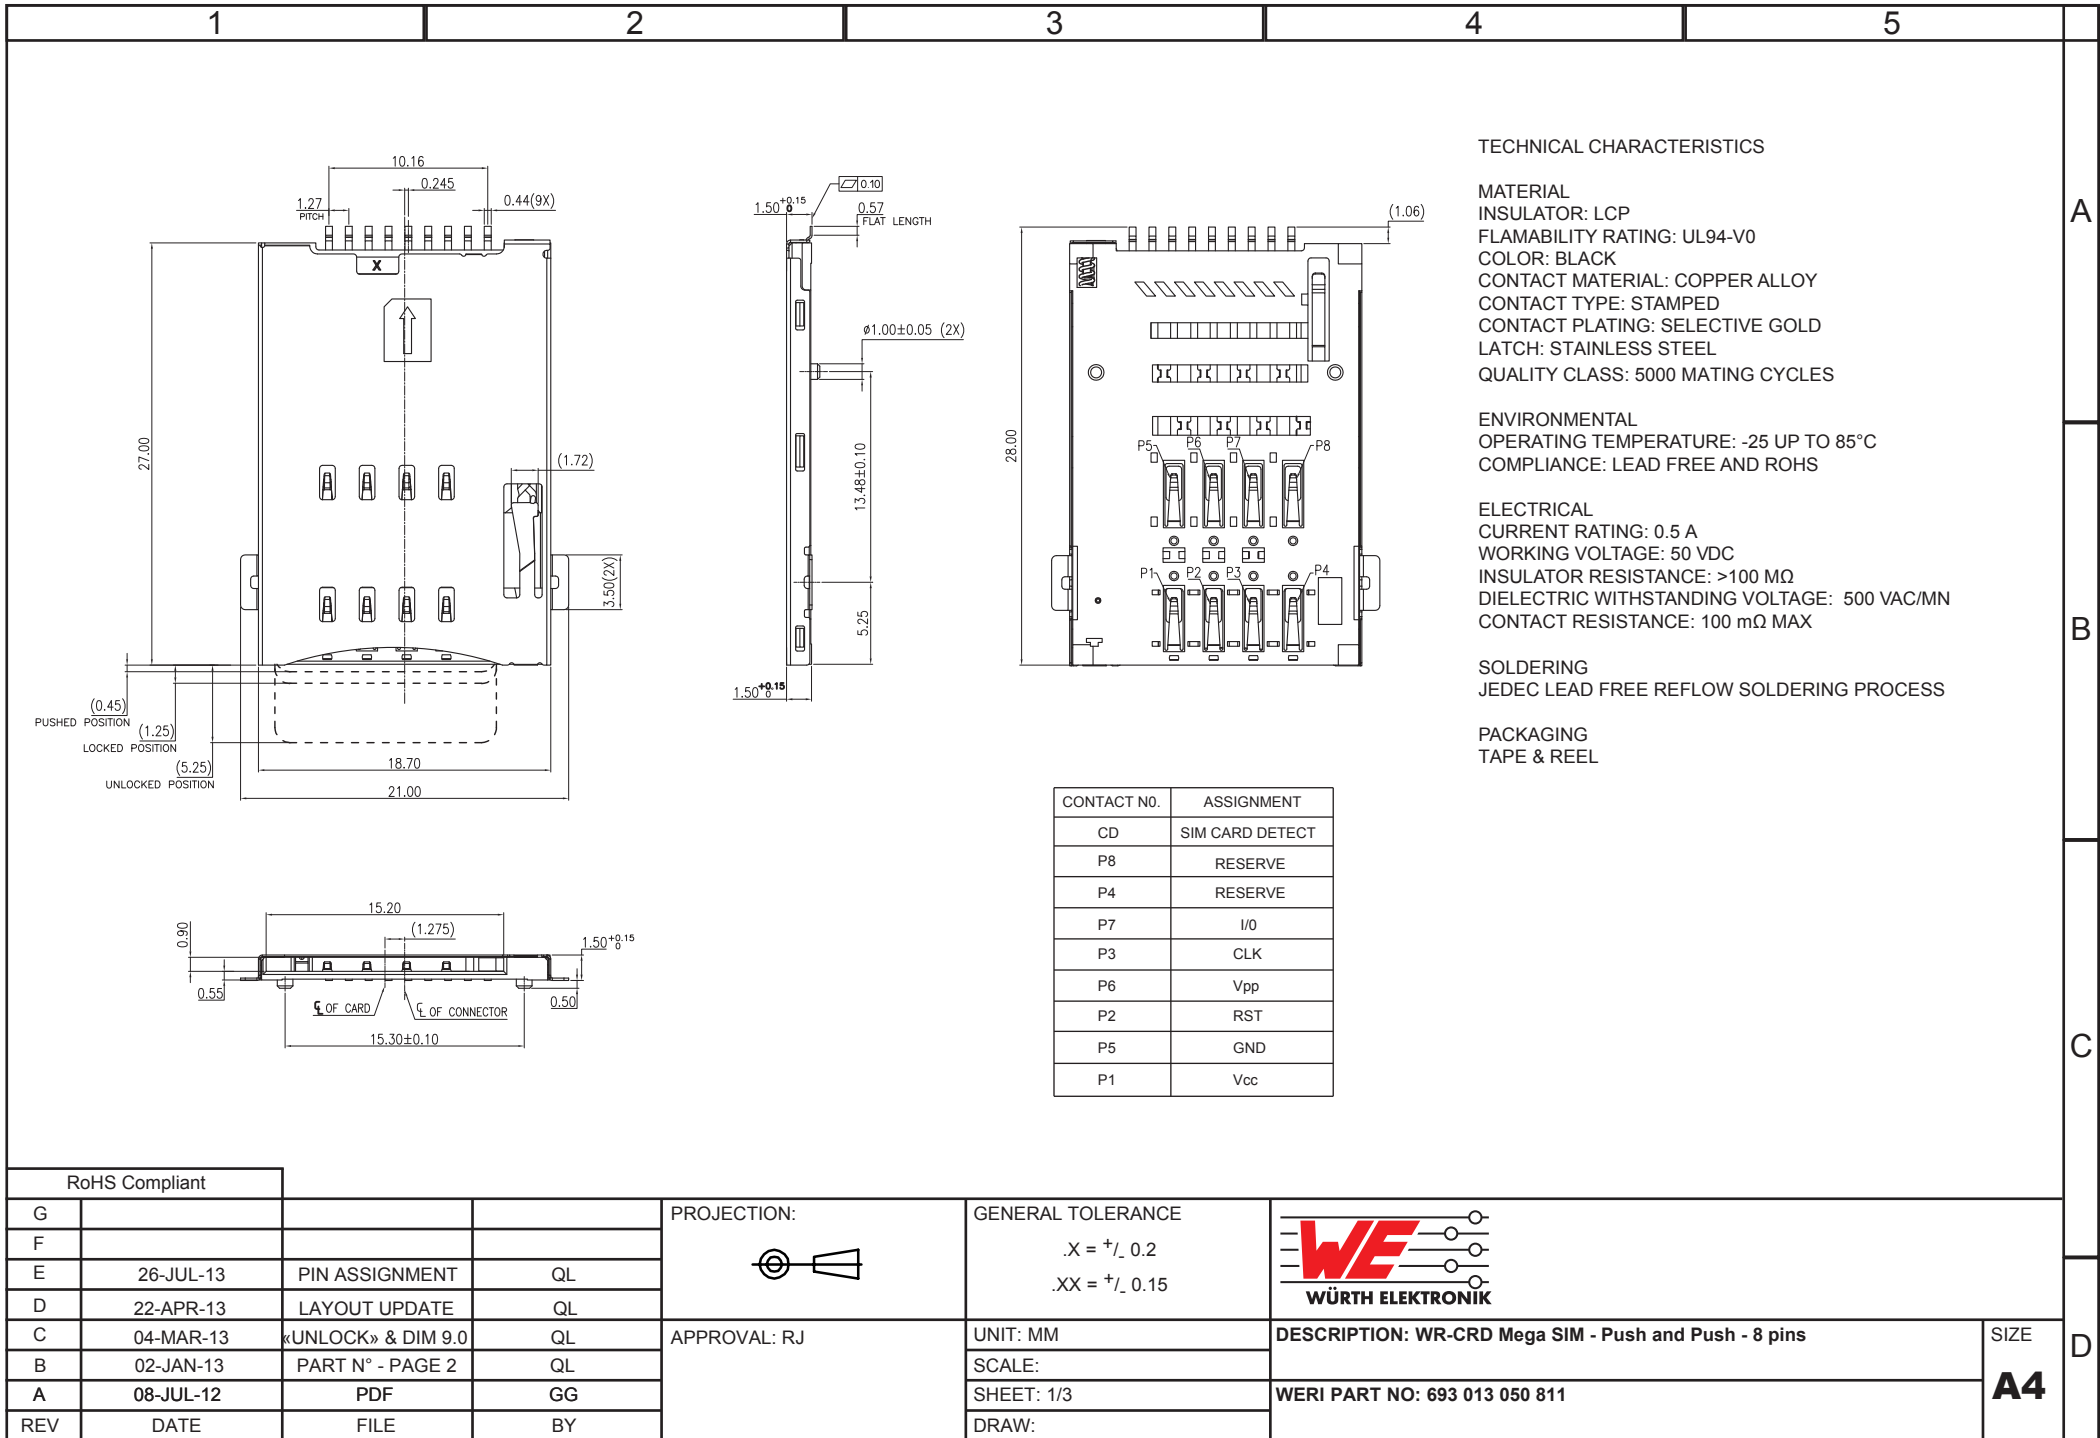

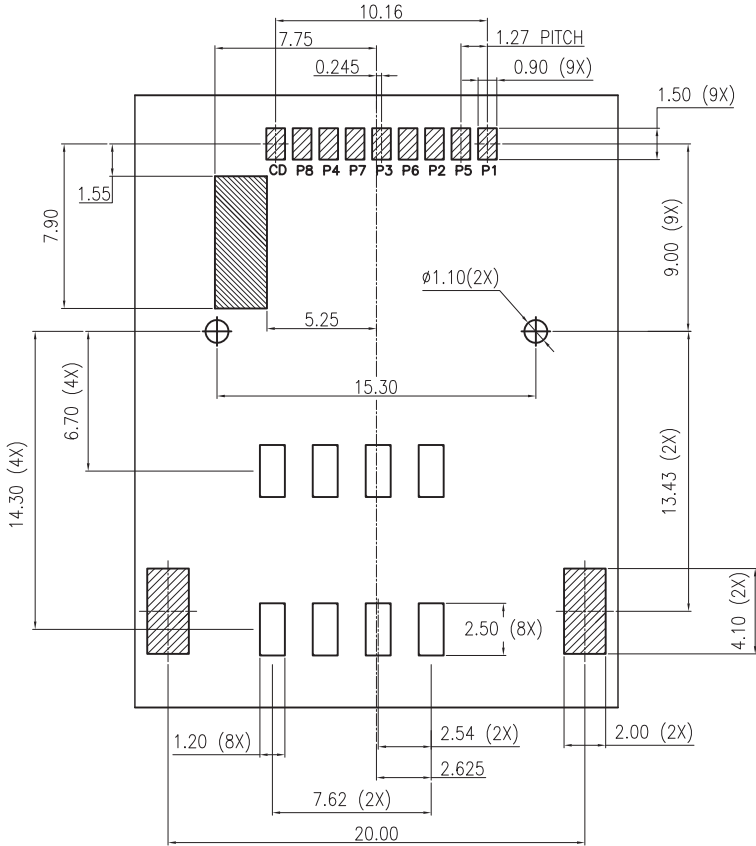


RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE ±0.05)


- CIRCUIT TRACE KEEP OUT AREA
- SOLDERING PAD AREA

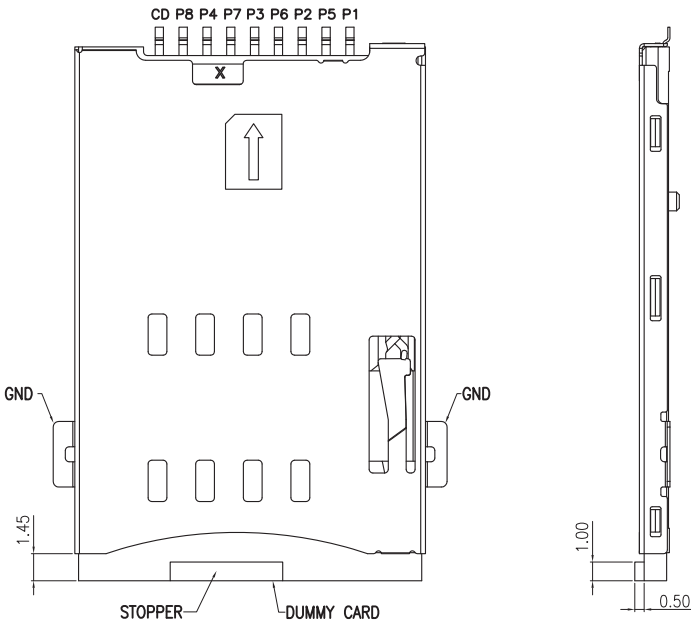

CONNECTOR WITH DUMMY CARD

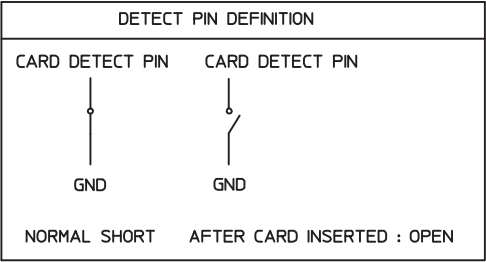


RoHS Compliant				PROJECTION:	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	WÜRTH ELEKTRONIK		DESCRIPTION: WR-CRD Mega SIM_Push and Push_8 pins WERI PART NO: 693 013 050 811	SIZE A4
G									
F									
E									
D				APPROVAL: RJ	UNIT: MM	DESCRIPTION: WR-CRD Mega SIM_Push and Push_8 pins		SIZE	A4
C									
B									
A									
REV	DATE	FILE	BY		DRAW: VICKY				

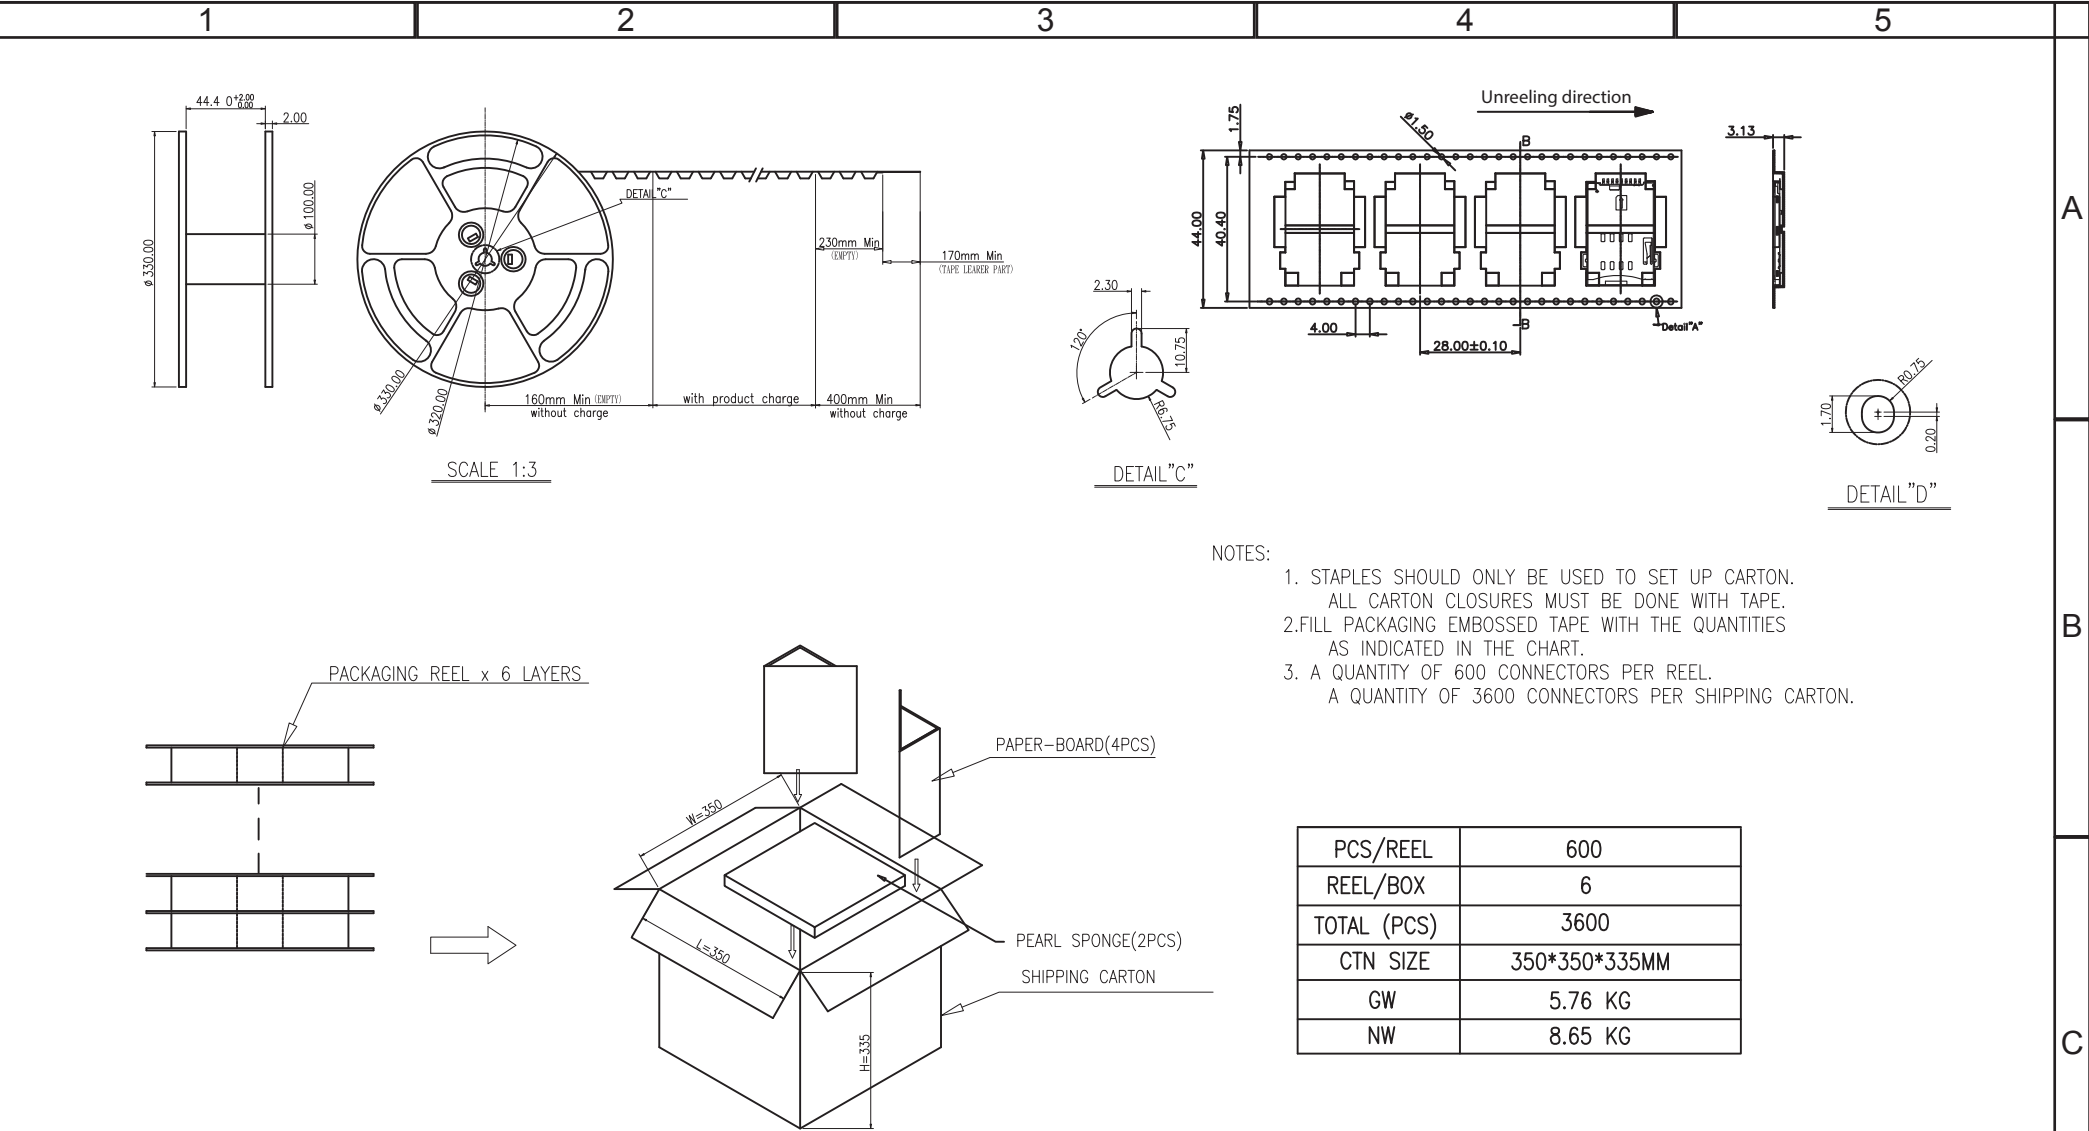

- NOTES:
1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON.
ALL CARTON CLOSURES MUST BE DONE WITH TAPE.
 - 2.FILL PACKAGING EMBOSSED TAPE WITH THE QUANTITIES
AS INDICATED IN THE CHART.
 3. A QUANTITY OF 600 CONNECTORS PER REEL.
A QUANTITY OF 3600 CONNECTORS PER SHIPPING CARTON.

PCS/REEL	600
REEL/BOX	6
TOTAL (PCS)	3600
CTN SIZE	350*350*335MM
GW	5.76 KG
NW	8.65 KG

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		
G							
F							
E							
D							
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: WR-CRD Mega SIM - Push and Push - 8 pins	SIZE A4
B					SCALE:		
A					SHEET: 3/3		
REV	DATE	FILE	BY		DRAW:		