


LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			A	REV PER ECR 07-017430	01AUG07	JR

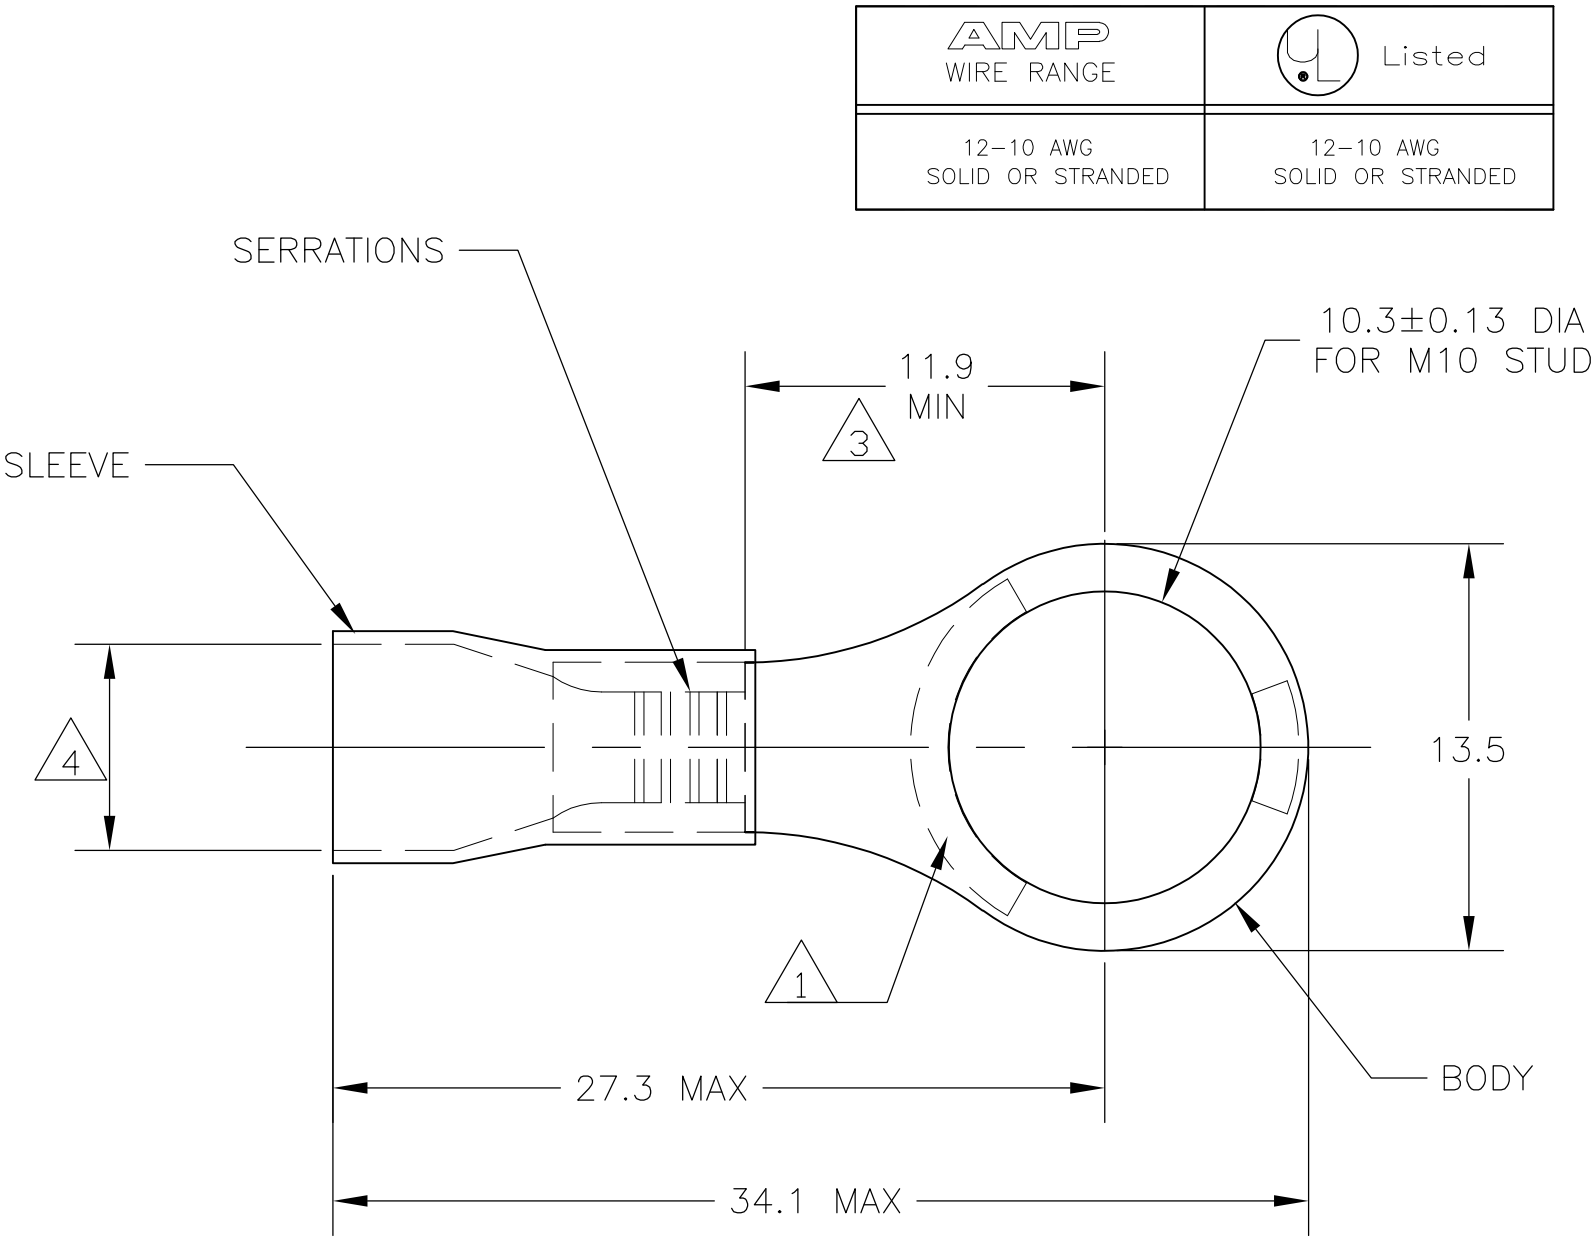

- 1

STAMP "AMP 12-10*", LOCATION APPROX AS SHOWN.
- 2

TONGUE THICKNESS IS 1.0±0.05
- 3

APPLIES TO EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 4

WIRE INSULATION DIA RANGE 3.81-6.35
- 5

BODY - COPPER PER ASTM B-152
SLEEVE - PVC
- 6

BODY - TIN PL PER ASTM B-545
SLEEVE - COLOR - YELLOW
- 7

105°C MAX OPERATING TEMPERATURE.
- 8

600 VOLT MAX
- 9

2.62-6.64mm² [5,180 - 13,100 CMA]
SOLID OR STRANDED

500		LOOSE PIECE		130677	
QTY		PACKAGE TYPE		PART NO	
01AUG07		Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
01AUG07					
ELUTTI		NAME TERMINAL RING TONGUE, PLASTI-GRIP, WIRE SIZE 12-10 —			
ELUTTI					
C					
SPEC		SIZE		CAGE CODE	
—		A3		00779	
		DRAWING NO		RESTRICTED TO	
		C-130677		—	
ER DRAWING				SCALE 4:1	
				SHEET 1 OF 1	
				REV A	

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± —
	1 PLC ± 0.1
	2 PLC ± —
	3 PLC ± —
	4 PLC ± —
MATERIAL	ANGLES ± 5°
	FINISH

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[130677](#)