
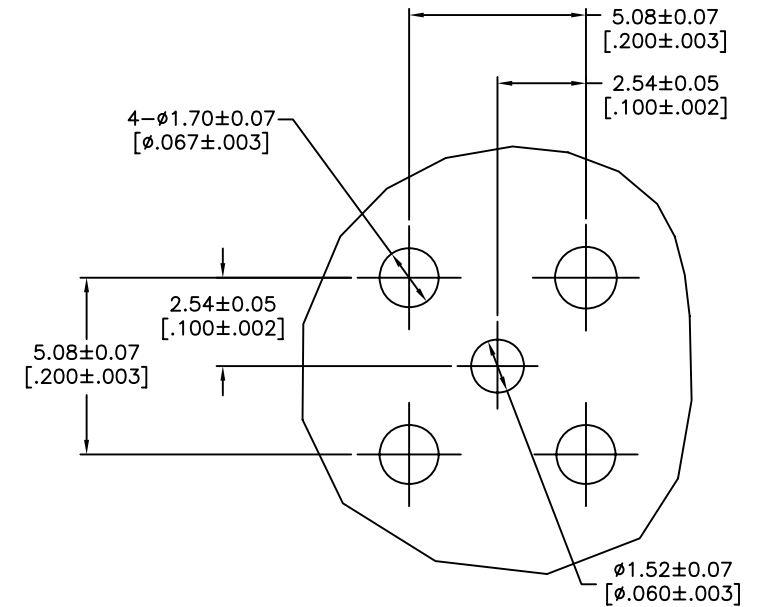


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/19/10	XXXXXX	INITIAL RELEASE

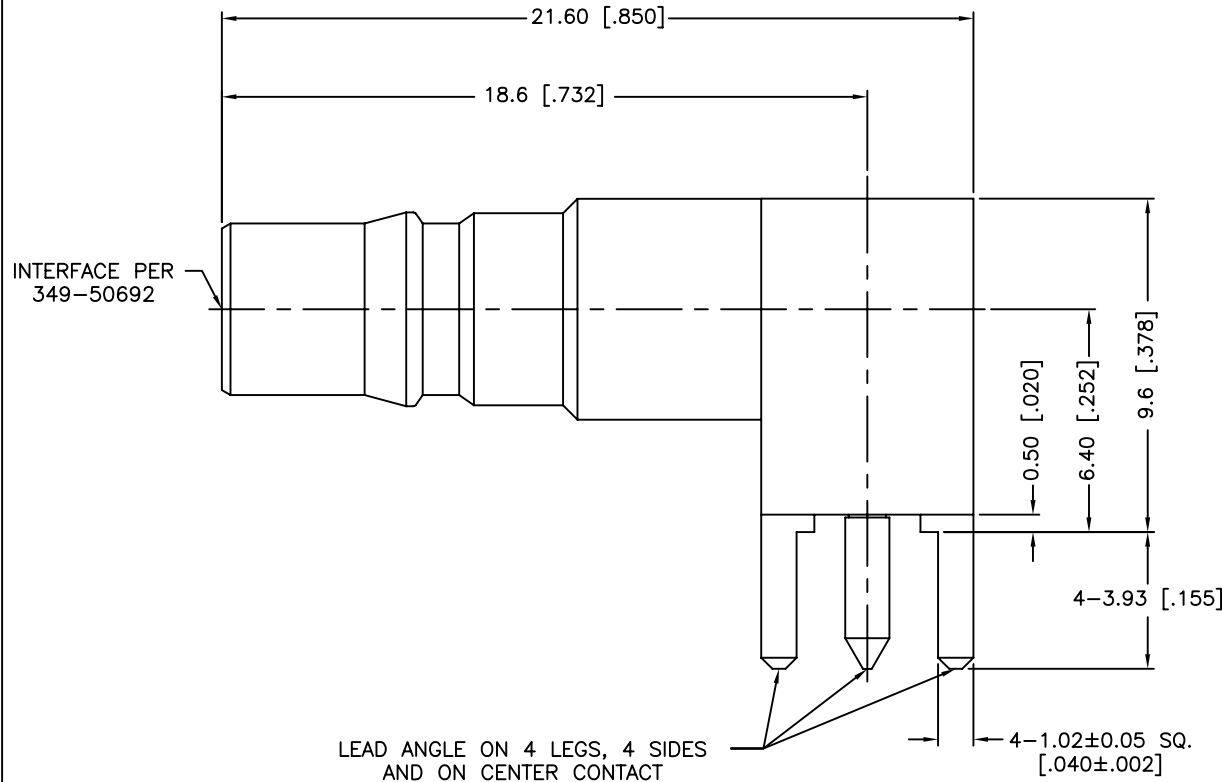

RECOMMENDED PCB HOLE PATTERN

1. DURABILITY: 100 CYCLES MIN.
2. TEMPERATURE RANGE: -40°C TO +80°C
3. FREQUENCY RANGE: DC - 6.0 GHz

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex							
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		DRAWN		M.ZHANG							11/19/10		
							CHECKED											
							ISSUED											
5					COVER PLATE		BRASS		NEXCOTE		1		PART DESCRIPTION QMA JACK, RIGHT ANGLE, PCB MOUNT					
4					INSULATOR-REAR		PTFE		NATURAL		1							
3					BODY		BRASS		GOLD		1							
2					CONTACT PIN		BERYLLIUM COPPER		GOLD		1							
1					INSULATOR		PTFE		NATURAL		1		PART NO. 134100					
					DESCRIPTION		MATERIAL		FINISH		QTY							
													CAD FILE C:/CONNEX/134100.DWG					
													DWG. NO. 134100.DWG					
													REV. NC		SIZE A		SCALE NA	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[134100](#)