

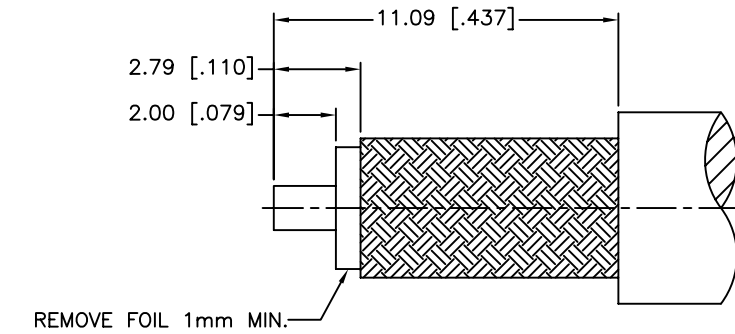
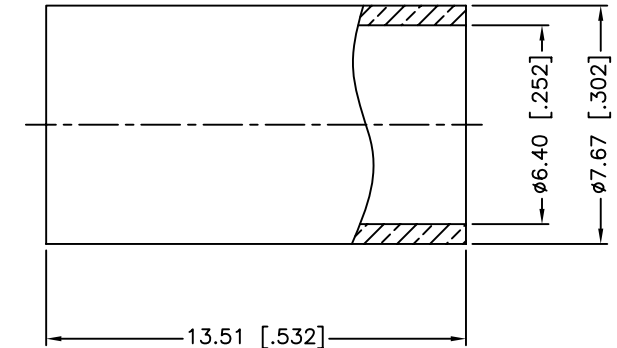


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/07/11	XXXXXX	INITIAL RELEASE

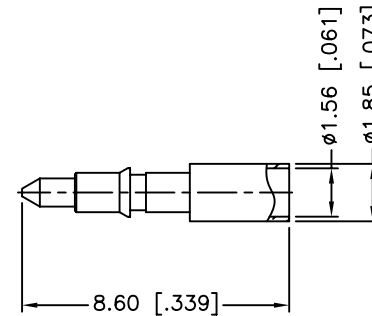

RECOMMENDED
CABLE STRIPPING DIM'S

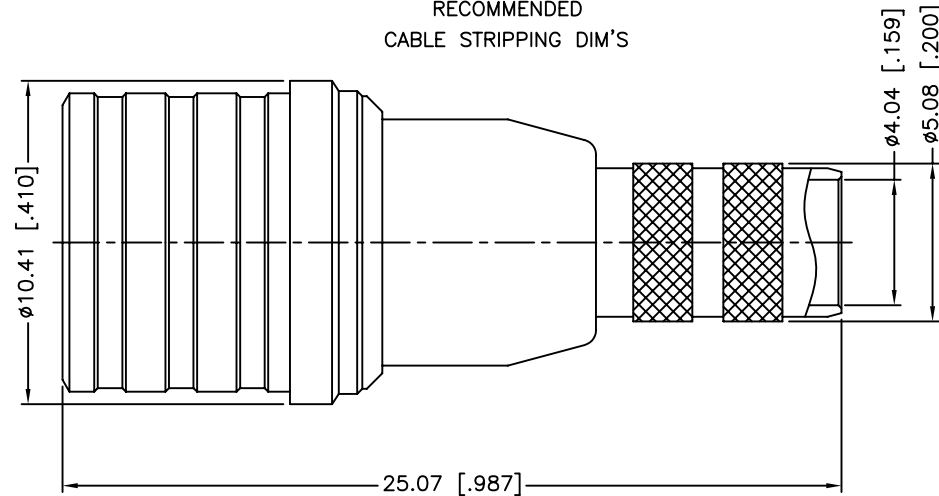

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER
3. IMPEDANCE:50 OHM
4. FREQUENCY RANGE: 0-6 GHz
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
7	FERRULE	COPPER	NEXCOTE	1		DRAWN	M.ZHANG	06/07/11						
6	CONTACT PIN	BRASS	GOLD	1		CHECKED			PART DESCRIPTION QMA STRAIGHT CRIMP PLUG – 50 ohm (FOR LMR–240 CABLE)					
5	SLEEVE	BRASS	NEXCOTE	1		ISSUED								
4	BARREL	BRASS	NEXCOTE	1		SHEET	1 OF 1		PART NO. 134104					
3	INSULATOR	PTFE	NATURAL	1										
2	OUT CONTACT	PHOSPHOR BRONZE	NEXCOTE	1		CAD FILE		C:/CONNEX/134104.DWG		DWG. NO. 134104.DWG				
1	BODY	BRASS	NEXCOTE	1					REV. NC					
	DESCRIPTION	MATERIAL	FINISH	QTY										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[134104](#)