


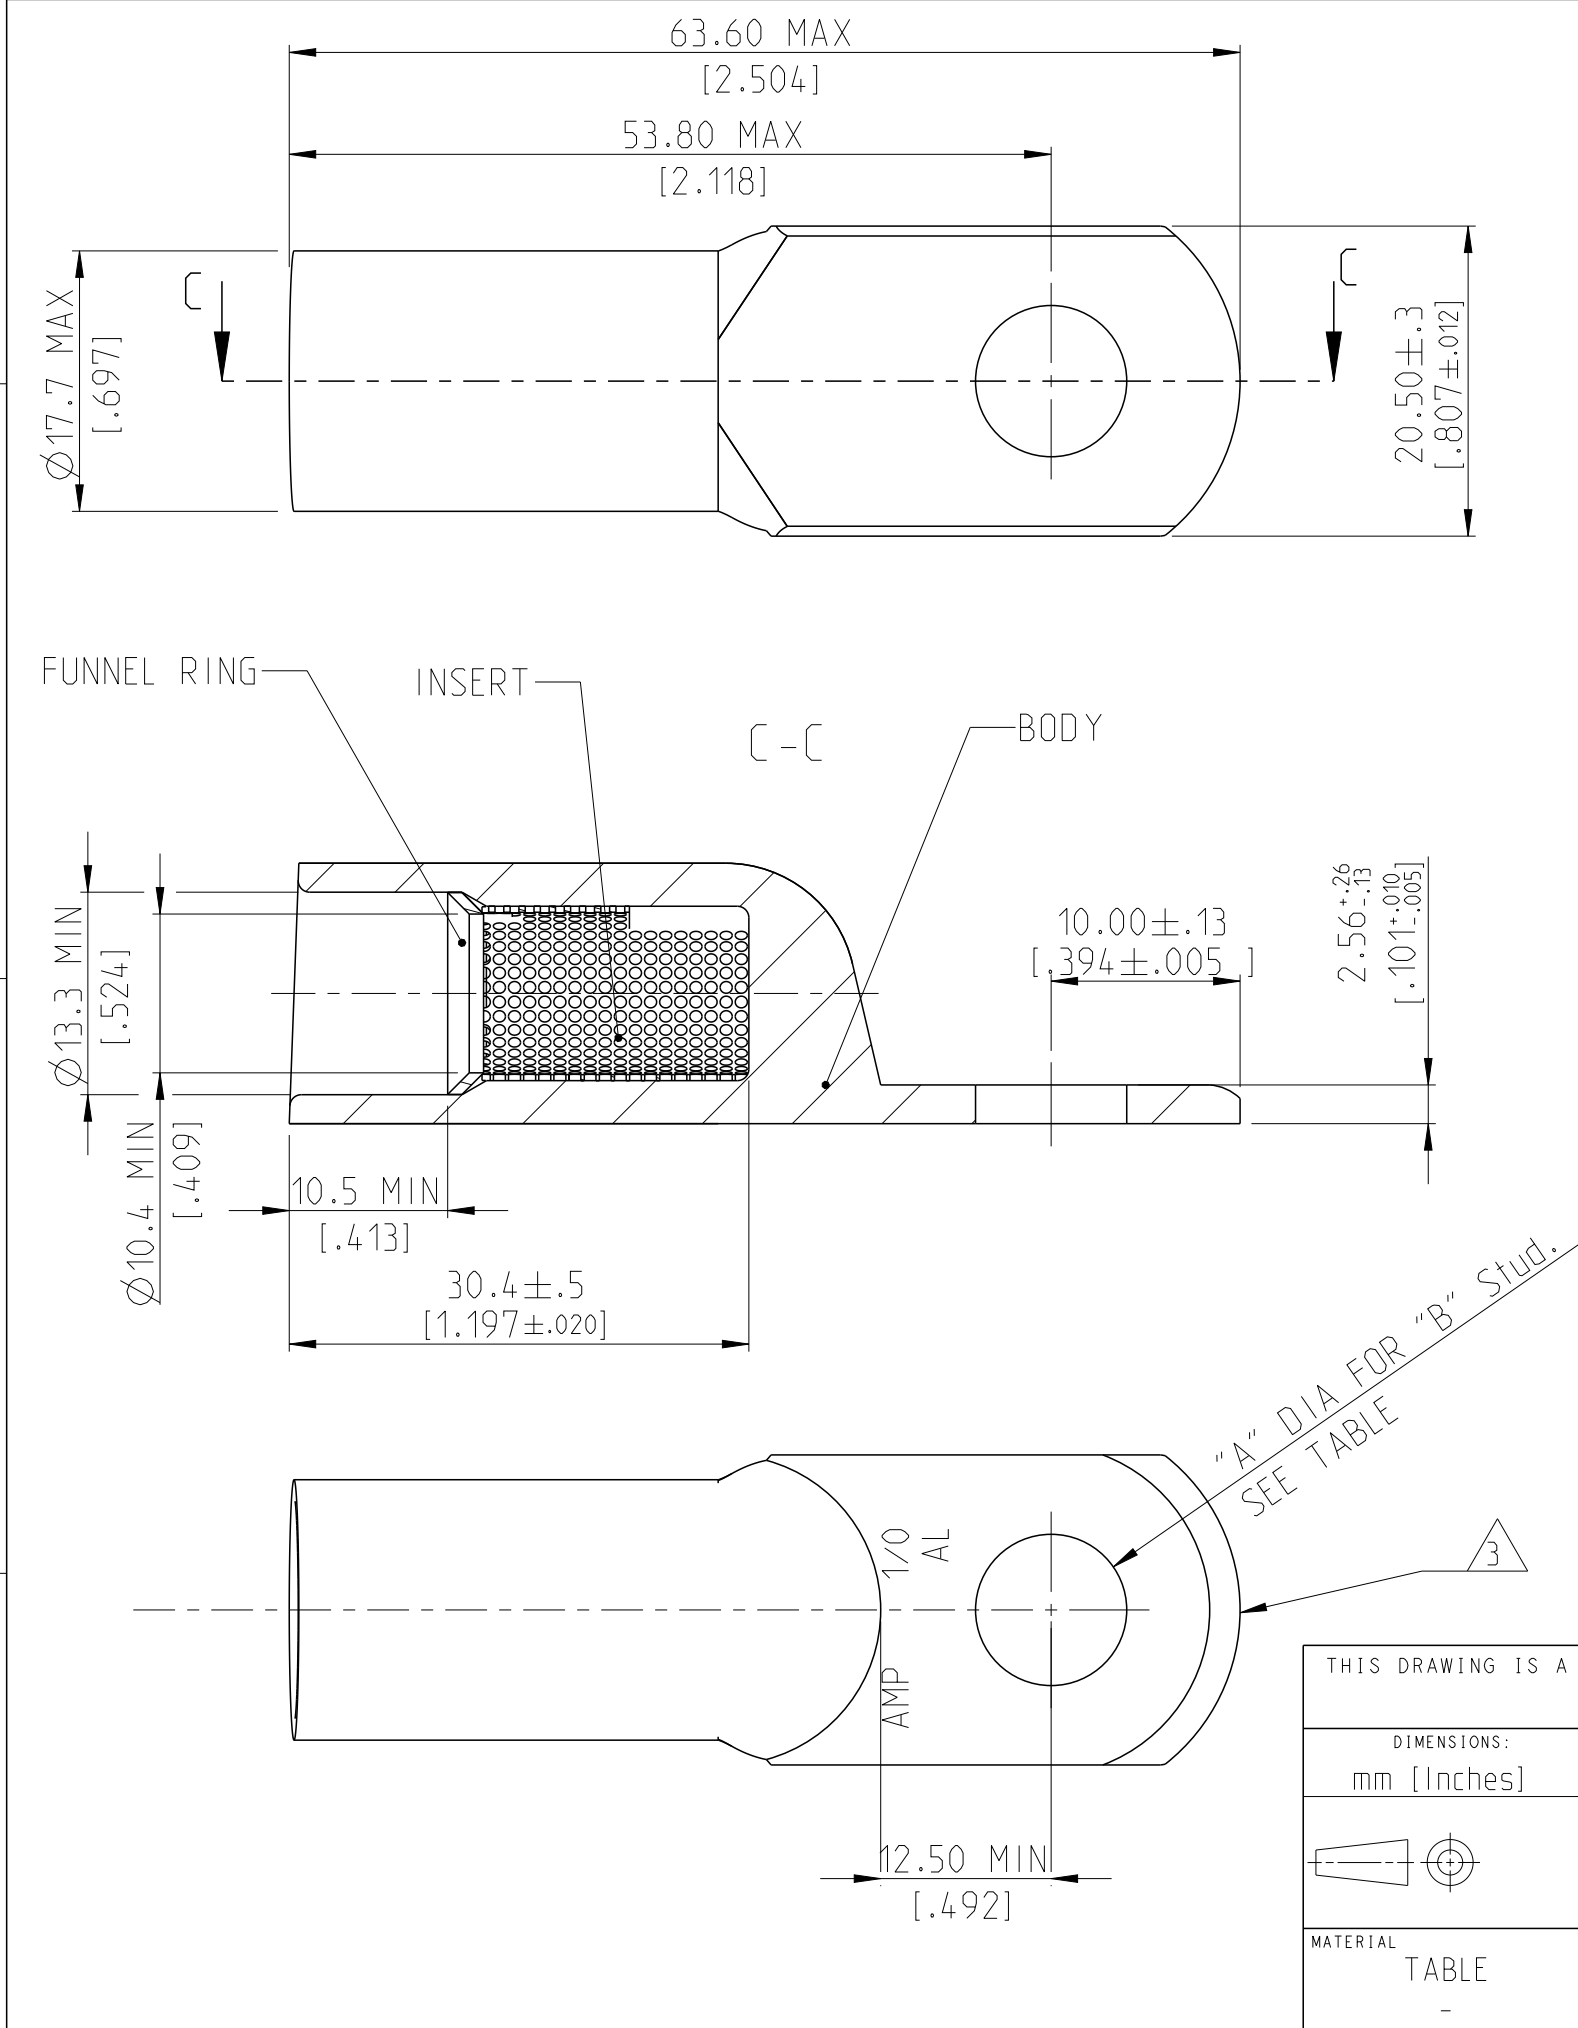

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REV PER ECO 14-015095	10-6-14	CT	PD
	L	REVISED PER ECO-16-002503	30MAR2016	RS	CT

1 WIRE INSULATION: 10.8[.425]-11.9[.469]

2 WIRE CMA: 83700 to 119500

3 THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.

56 grams	8.34±0.04 [.328±.002]	5/16 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .00381[.000150] MIN THICK PER MIL-T-10727 INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [0.000100] MIN THICK	134452-1
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JJ. DESPRETZ 23JUN2004	TE Connectivity		
DIMENSIONS: mm [Inches]		CHK G-ROBERT 23JUN2004			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Y. PETRONIN 23JUN2004	NAME SEALED COPALUM ASSEMBLY, 1/0, ALU		
MATERIAL TABLE		PRODUCT SPEC	SIZE A3		
FINISH TABLE		APPLICATION SPEC	CAGE CODE -		
		WEIGHT -	DRAWING NO C-134452		
		Customer Drawing	RESTRICTED TO -		
		SCALE 2:1	SHEET 1 OF 2		
			REV L		

